

POWER LAW SPEECH COMPRESSION
AND EXPANSION

—••—
E. RAYMOND KNICKEL

1953

Library
U. S. Naval Postgraduate School
Monterey, California



POWER LAW SPEECH COMPRESSION AND EXPANSION

E. R. Knickel

10-10-60
E. R. Knickel, Department of Electrical Engineering
University of Illinois at Chicago
Chicago, Illinois 60607

POWER LAW SPEECH COMPRESSION
AND EXPANSION

by

E. Raymond Knickel
Lieutenant, United States Navy

Submitted in partial fulfillment
of the requirements
for the degree of
MASTER OF SCIENCE
in
ENGINEERING ELECTRONICS

United States Naval Postgraduate School
Monterey, California
1953

THE HISTORY OF THE CITY OF BOSTON

BY
JOHN H. COOPER, ESQ.

IN TWO VOLUMES.
THE FIRST VOLUME
CONTAINS THE HISTORY
FROM THE FIRST
SETTLEMENT OF THE
CITY TO THE
PRESENT TIME.

LONDON: Printed by J. JOHNSON, in Pall-mall.
1794.

This work is accepted as fulfilling
the thesis requirements for the degree of

MASTER OF SCIENCE

in

ENGINEERING ELECTRONICS

PREFACE

This thesis covers a rather novel method for increasing the power conveying intelligence in a speech modulated radio telephone system. The basic idea for the method used was conceived while trying to find some means for reducing bandwidth requirements for speech transmission. This led to considering the possibility of electronically making a trigonometric transformation according to the trigonometric identity,

$$\sin \frac{1}{2} x = \pm \sqrt{\frac{1 - \cos x}{2}},$$

in order to obtain an output frequency one half of the input frequency. It did not seem practical to use this idea for bandwidth compression, however, as among other things, it would require breaking up the modulating wave into all of its simple sinusoidal components at the point of transmission. In order to extract the intelligence, it would require a complicated inverse operation at the point of reception.

This led to the realization, however, that if one could perform some function, such as taking the square root of the input wave that there would result instantaneous compression. Furthermore, having performed a known function in the process of compression, one could theoretically reconstruct the input wave exactly by performing the inverse function in an expansion process at the point of reception.

Unfortunately, the mathematical analysis for the operation of this type of system had to be extremely limited. This results from

complications arising due to the non-linearities that are inherent to the system. The mathematics of non-linear systems is such that it seems impossible to develop a general method for analyzing this system. Therefore, the mathematical analysis had to be greatly simplified and even then, answers that reveal relatively small amount of information required much tedious mathematics.

Throughout this thesis, the analysis presumes that this system would find it's greatest use in rather simple radio communication systems such as aircraft, marine or amateur use.

The author wishes to express his appreciation to Assistant Professor C. F. Klamm, Jr. of the U. S. Naval Postgraduate School for his many helpful suggestions in preparing the final copy of this paper.

TABLE OF CONTENTS

	Page
CERTIFICATE OF APPROVAL	i
PREFACE	ii
TABLE OF CONTENTS	iv
LIST OF ILLUSTRATIONS	v
CHAPTER	
I. INTRODUCTION	1
II. CIRCUIT DESIGN	9
III. MATHEMATICAL ANALYSIS OF CIRCUIT OPERATION	27
IV. EXPERIMENTAL RESULTS	51
APPENDIX I	56
BIBLIOGRAPHY	78

LIST OF ILLUSTRATIONS

	Page
Figure 1. Waveform at output and input of compressing amplifier with a distorted square wave input waveform	5
Figure 2. Waveform at output and input of compressing amplifier with a sinusoidal output waveform	6
Figure 3. Circuit for obtaining characteristics described by Equation 1 of Chapter II.	10
Figure 4. Circuit for obtaining symmetrical response corresponding to Equation 2 of Chapter II	11
Figure 5. Circuit for selecting matched crystal diodes	11
Figure 6. Circuit for obtaining a response corresponding to Equation 2 of Chapter II with m variable over a limited range	13
Figure 7. E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to zero ohms	14
Figure 8. E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to 100 ohms	15
Figure 9. E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to 200 ohms	16
Figure 10. E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to 300 ohms	17
Figure 11. E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to 400 ohms	18
Figure 12. E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to 500 ohms	19
Figure 13. Plot of m vs. R for circuit shown in Figure 6	20
Figure 14. Circuit for obtaining a response corresponding to Equation 4 of Chapter II.	21
Figure 15. Block diagram of arrangement for obtaining a response corresponding to Equation 4 of Chapter II utilizing a high gain inverse feedback loop	22

1	THE JOURNAL OF THE	1
2	THE JOURNAL OF THE	2
3	THE JOURNAL OF THE	3
4	THE JOURNAL OF THE	4
5	THE JOURNAL OF THE	5
6	THE JOURNAL OF THE	6
7	THE JOURNAL OF THE	7
8	THE JOURNAL OF THE	8
9	THE JOURNAL OF THE	9
10	THE JOURNAL OF THE	10
11	THE JOURNAL OF THE	11
12	THE JOURNAL OF THE	12
13	THE JOURNAL OF THE	13
14	THE JOURNAL OF THE	14
15	THE JOURNAL OF THE	15
16	THE JOURNAL OF THE	16
17	THE JOURNAL OF THE	17
18	THE JOURNAL OF THE	18
19	THE JOURNAL OF THE	19
20	THE JOURNAL OF THE	20
21	THE JOURNAL OF THE	21
22	THE JOURNAL OF THE	22
23	THE JOURNAL OF THE	23
24	THE JOURNAL OF THE	24
25	THE JOURNAL OF THE	25
26	THE JOURNAL OF THE	26
27	THE JOURNAL OF THE	27
28	THE JOURNAL OF THE	28
29	THE JOURNAL OF THE	29
30	THE JOURNAL OF THE	30
31	THE JOURNAL OF THE	31
32	THE JOURNAL OF THE	32
33	THE JOURNAL OF THE	33
34	THE JOURNAL OF THE	34
35	THE JOURNAL OF THE	35
36	THE JOURNAL OF THE	36
37	THE JOURNAL OF THE	37
38	THE JOURNAL OF THE	38
39	THE JOURNAL OF THE	39
40	THE JOURNAL OF THE	40
41	THE JOURNAL OF THE	41
42	THE JOURNAL OF THE	42
43	THE JOURNAL OF THE	43
44	THE JOURNAL OF THE	44
45	THE JOURNAL OF THE	45
46	THE JOURNAL OF THE	46
47	THE JOURNAL OF THE	47
48	THE JOURNAL OF THE	48
49	THE JOURNAL OF THE	49
50	THE JOURNAL OF THE	50
51	THE JOURNAL OF THE	51
52	THE JOURNAL OF THE	52
53	THE JOURNAL OF THE	53
54	THE JOURNAL OF THE	54
55	THE JOURNAL OF THE	55
56	THE JOURNAL OF THE	56
57	THE JOURNAL OF THE	57
58	THE JOURNAL OF THE	58
59	THE JOURNAL OF THE	59
60	THE JOURNAL OF THE	60
61	THE JOURNAL OF THE	61
62	THE JOURNAL OF THE	62
63	THE JOURNAL OF THE	63
64	THE JOURNAL OF THE	64
65	THE JOURNAL OF THE	65
66	THE JOURNAL OF THE	66
67	THE JOURNAL OF THE	67
68	THE JOURNAL OF THE	68
69	THE JOURNAL OF THE	69
70	THE JOURNAL OF THE	70
71	THE JOURNAL OF THE	71
72	THE JOURNAL OF THE	72
73	THE JOURNAL OF THE	73
74	THE JOURNAL OF THE	74
75	THE JOURNAL OF THE	75
76	THE JOURNAL OF THE	76
77	THE JOURNAL OF THE	77
78	THE JOURNAL OF THE	78
79	THE JOURNAL OF THE	79
80	THE JOURNAL OF THE	80
81	THE JOURNAL OF THE	81
82	THE JOURNAL OF THE	82
83	THE JOURNAL OF THE	83
84	THE JOURNAL OF THE	84
85	THE JOURNAL OF THE	85
86	THE JOURNAL OF THE	86
87	THE JOURNAL OF THE	87
88	THE JOURNAL OF THE	88
89	THE JOURNAL OF THE	89
90	THE JOURNAL OF THE	90
91	THE JOURNAL OF THE	91
92	THE JOURNAL OF THE	92
93	THE JOURNAL OF THE	93
94	THE JOURNAL OF THE	94
95	THE JOURNAL OF THE	95
96	THE JOURNAL OF THE	96
97	THE JOURNAL OF THE	97
98	THE JOURNAL OF THE	98
99	THE JOURNAL OF THE	99
100	THE JOURNAL OF THE	100

Figure 16.	Proposed circuit schematic for compressing amplifier and expanding amplifier	26
Figure 17.	Plot of compressed cosine wave	28
Figure 18.	Waveform at output of transmitting end amplifier with input waveform of the type described by Equation (1) of Chapter III	29
Figure 19.	Spectrogram of the word "be" at the input to the system	65
Figure 20.	Spectrogram of the word "be" at output of 3,000 cycle low pass filter following transmitting end amplifier	66
Figure 21.	Spectrogram of the word "be" at output of system with a 3,000 cycle low pass filter at output of transmitting end amplifier and also in the output circuit of the system.	67
Figure 22.	Spectrogram of the word "be" at output of the system with no filters in the system	68
Figure 23.	Spectrogram of the word "pay" at the input to the system	69
Figure 24.	Spectrogram of the word "pay" at output of 3,000 cycle low pass filter following transmitting end amplifier	70
Figure 25.	Spectrogram of the word "pay" at output of system with a 3,000 cycle low pass filter at output of transmitting end amplifier and also in the output circuit of the system.	71.
Figure 26.	Spectrogram of the word "pay" at output of the system with no filters in the system	72
Figure 27.	Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.375$	73
Figure 28.	Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.425$	74
Figure 29.	Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.475$	75

Figure 30	Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.525$	76
Figure 31	Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.546$	77

CHAPTER I

INTRODUCTION

Summary: This thesis presents an analysis of an instantaneous speech compression system that theoretically enables accurate reproduction of the original signal at the point of reception. The analysis is primarily based on a "half-power law" compression resulting in an effective power gain of about 7 db. The receiving system performs the inverse operation thereby reproducing the original signal. Perfect reproduction increases bandwidth requirements, but it is indicated that satisfactory reproduction can be obtained without exceeding normal bandwidth requirements. The probable effects of amplitude and phase distortion within the system are discussed. Circuits for accomplishing the indicated functions are developed and experimental data on these circuits is presented.

It is the purpose of this thesis to analyze a proposed method of increasing the average intelligence conveying power in a radio telephone system, particularly as it applies to voice modulated systems. It is proposed to employ as the modulating source for a radio telephone transmitter an audio compressing amplifier that will have an output instantaneously proportional to the square root of the absolute value of the modulating wave with the instantaneous input polarity being retained by the output. That is, when the input wave is positive, the output will be positive and proportional to the square root of the input wave, and when the input wave is negative, the output will be negative and proportional to the square root of the absolute magnitude of the input wave.

The receiver to be used with this system would be expected

to employ an audio expanding amplifier whose output would be proportional to the "square" of the absolute value of the instantaneous audio input voltage. Hence the receiver would act to remove the distortion introduced by the non-linearity of the amplifier employed at the transmitting end, and a true reproduction of the transmitted voice would be received.

The analysis also includes some data on power relations different from that of the square root. In other words, if E_{in} is the input audio wave, the output wave will be of the form $A(E_{in})^m$ where m takes on values different from 0.5. Throughout this thesis, m will refer to the value of the exponent involved. Where m is not specified, it will be assumed equal to 0.5.

This scheme will act to increase the average intelligence conveying power in two ways. First, in conversational speech, the ratio of 1/8 sec. peak to averaged power is roughly 12 db.¹ This indicates a ratio of 1/8 sec. peak to averaged modulating power of 16 to 1, or a ratio of 1/8 sec. peak to averaged voltage of 4 to 1. Hence, with conversational speech, the averaged percentage of modulation can only be a maximum of about 25%. For example, with a Class C plate modulated transmitter, the average peak modulating voltage equals 25% or 1/4 of the d.c. plate voltage and therefore the peak modulating current also equals 1/4 of the d.c. plate current. If the plate voltage is E_b and the plate current is I_b , then the peak modulating power is $1/4 E_b \times 1/4 I_b$ or $1/16 E_b I_b$. Converting this to effective power, the effective modulating power is $1/4 E_b \times 0.707 \times 1/4 I_b \times 0.707 = 1/32 E_b I_b$ or 1/32 of the d.c. power supplied to the plate circuit of

the Class C stage.

This means that a 1 kilowatt output transmitter actually yields only 31.2 watts of intelligence conveying power. By the same reasoning, a single sideband transmitter capable of $\frac{1}{2}$ kilowatt power output, the actual average output during periods of modulation is about 62.5 watts.

By using some method of reducing the peak to averaged ratio of power in a speech wave, it is possible to increase the intelligence conveying power in an amplitude modulated system.

One of these methods is to use peak clipping and another method is the so-called "super modulation". Both of these methods introduce undesirable distortion in the system which cannot be removed by any simple means at the receiving end of the system.

The system proposed by this thesis also introduces distortion, but in a manner in which it can be eliminated at the receiving end. This automatically results, since a known function is to be performed on the modulating signal and the inverse of that function can therefore be accomplished at the receiving end, thereby eliminating any distortion that has been introduced at the transmitting end. With "peak clipping", or "super-modulation", the function being performed on the modulating wave varies with its instantaneous amplitude and hence the inverse of the function cannot be determined.

By taking the "square root" of the modulating voltage, we reduce the ratio of maximum peak amplitude to average peak amplitude of the audio wave from about 4 to 1 down to about $(4)^{1/2}$ to 1, or 2 to 1. Hence, the same audio signal can now be used to produce

an average percentage of modulation of 50%. This increases the amount of power conveying intelligence by a factor of four.

The second manner in which the proposed system increases the power conveying intelligence is by reason of the fact that the audio wave will now have a higher R. M. S. to peak ratio than before.

A sine wave has a R. M. S. to peak ratio of 0.707. If our modulating wave can be represented by a sine wave, the R. M. S. value now equals

$$\sqrt{\frac{\int_0^{\pi} \sin^2 \theta \, d\theta}{\pi/2}} = \sqrt{\frac{[-\cos \theta]_0^{\pi/2}}{\pi/2}} = 0.8$$

Thus the total increase in effective power will be by a factor of $2^2 \times \left(\frac{0.8}{0.707}\right)^2 = 5.1$, or about 7 db.

The advantages to be gained by this method from the standpoint of power are obvious. However, the advantages or disadvantages of this system from standpoint of bandwidth requirements are not so obvious.

For instance, if we passed a square wave having rounded edges through this amplifier, as shown by the solid line in Figure 1, the output waveform would be of the form indicated by the dashed line. Since the dashed line has sharper corners than the solid line, the energy contained in the higher order harmonics has been increased. Let us now take a waveform described by

$$y = \sin^2 \theta \quad (2n+1)\pi \leq \theta \leq (2n+2)\pi$$

$$y = \sin^2 \theta \quad (2n+2)\pi \leq \theta \leq (2n+3)\pi$$

giving us the waveform represented by the solid curve of Figure 2.

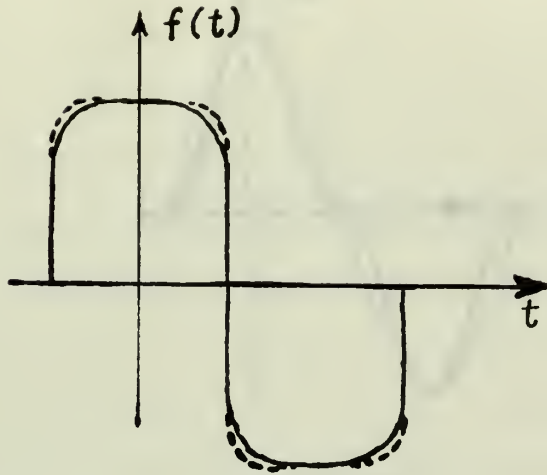


Figure 1

Waveform at output and input of compressing amplifier with a distorted square wave input wave form; Solid curve represents distorted square wave input. Dashed curve is the same waveform after passing through the compressing amplifier.

This waveform is obviously rich in harmonics, and yet when it is passed through the proposed amplifier, the output will be simply a plot of $\sin \theta$, as indicated by the dashed curve of Figure 2, which is certainly not rich in harmonics, but is a pure sine wave having no harmonic content. Thus, in one case, this amplifier has increased the harmonic content of a wave, and in another case it has decreased the harmonic component of a wave. It is apparent that whether the harmonic content of a wave is increased or decreased is a function of the nature of the input wave.

$$u(x, y) = \frac{1}{2} (x^2 + y^2) - \frac{1}{4} (x^4 + y^4)$$

$$v(x, y) = \frac{1}{2} (x^2 - y^2) - \frac{1}{4} (x^4 - y^4)$$

Figure 1 shows the level curves of the function $u(x, y)$ in the xy -plane.

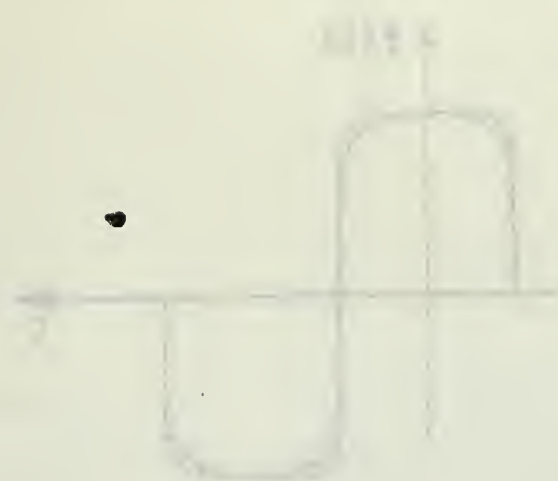


Figure 1

The level curves of the function $u(x, y)$ are shown in Figure 1. The curves are symmetric about both the x and y axes. The inner loop is centered at the origin and is elongated along the y -axis. The outer loop is also centered at the origin and is more circular, but slightly elongated along the x -axis.

The level curves of the function $u(x, y)$ are shown in Figure 1. The curves are symmetric about both the x and y axes. The inner loop is centered at the origin and is elongated along the y -axis. The outer loop is also centered at the origin and is more circular, but slightly elongated along the x -axis.

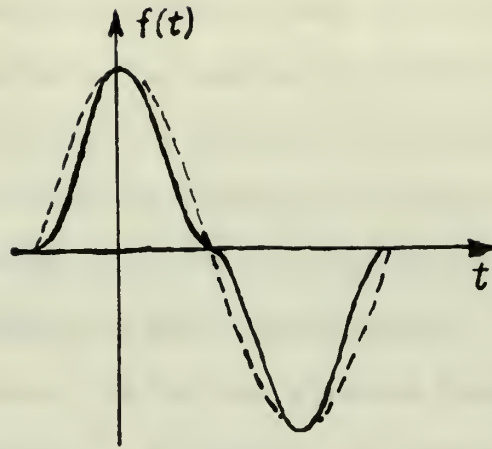


Figure 2.

Waveform at output and input of compressing amplifier with a sinusoidal output waveform; Solid curve is a plot of the function described by

$$y = \sin^2 \theta \quad (2n+1)\pi \leq \theta \leq (2n+2)\pi$$

$$y = \sin^2 \theta \quad (2n+2)\pi \leq \theta \leq (2n+3)\pi$$

Solid curve is the sine wave that results from passing this waveform through the compressing amplifier.

Since the nature of a speech wave is continually changing, one can anticipate that at times the audio amplifier employed at the transmitter will be increasing the number of harmonics in the wave, while the audio amplifier at the receiver will be decreasing the number of harmonics present and at other times the role played by the two amplifiers will, in this respect, be reversed.

To attempt to analyze mathematically the effect of this system on the bandwidth requirements for speech transmission seems an endless task that would yield results of questionable value. The bandwidth requirements will, of course, be determined by characteristics of the sending end audio system and the nature of the intelligence

being transmitted, which in this case will be some form of speech. The bandwidth requirements could hardly be expected to be the same as for speech transmission employing only linear amplifiers. Since, as was pointed out earlier, the sending end amplifier may act to either increase or decrease the frequency components of the input wave, it would theoretically be necessary to analyze the effect of the sending end audio system on every conceivable speech input wave, of which there are an infinite number, called phones. The speech sounds of any language, however, do fall into discrete intelligence conveying patterns called phonemes.² In English, the number of phonemes is approximately 48.³ The basic frequencies in any phoneme, of course, vary from individual to individual, particularly between a male adult and a female adult, or an adult and a child. There is also some difference in the phoneme patterns between individuals of the same sex and age group coming from different sections of the country.

If we were to restrict ourselves in the analysis to one person's voice, it might be possible to mathematically analyze the effect of this system on required bandwidth by picking several, say ten, instants of time during the space of every phoneme and then determining the increase or decrease in bandwidth for each such instant of time. This would reduce the problem to determining about 500 different speech waveforms. It would then be necessary to take the "square root" of each wave form so determined and then run a Fourier analysis on each resultant waveform. Obviously, even this simplified mathematical approach is far too time consuming to make a part of this thesis.

Fortunately, the phonemes which require the greatest bandwidths for proper transmission are the voiceless phonemes, of which there are about 8. The only exception to this seems to be in the case of the voiced fricative sound "z" as in "zoo".⁴ Of this group, the phoneme "h" (as in "he") does not require an appreciable bandwidth. Since these phonemes are unvoiced, their natures should not differ greatly between individuals. Furthermore, there may be sufficient similarity between these sounds so that they will be affected in a similar manner so far as bandwidth requirements are concerned. However, even in these cases, it is felt that it is best to perform a laboratory type analysis first, and then let the results of such an analysis point the way to profitable areas of mathematical analysis.

CHAPTER II

CIRCUIT DESIGN

The problem of determining a circuit that will have an output that is instantaneously proportional to the square root of the input signal is one that apparently no one has yet neatly accomplished with a simple circuit.⁵ Conventional so-called square law devices or circuits in general have a characteristic that only approximates a square law relationship. Furthermore, the approximate square law relationship will hold only over a limited range. It would appear that vacuum tubes will give the closest approximation to a power law relation with miniature copper oxide rectifiers and germanium diodes in that order giving the next most desirable characteristics.⁶ Unfortunately, when using vacuum tubes, it is necessary to compensate for contact potential and the fact that a vacuum tube may draw some current with zero plate voltage. These compensating circuits complicate the device and could very well be a source of frequency distortion. Copper oxide rectifiers have characteristics that vary with temperature rather noticeably. They tend to introduce some frequency distortion, and it appears that it would be difficult to obtain values of m in the order of 0.5. Hence, it was decided to first attempt to obtain the desired exponential characteristics by using germanium diodes.

A personal contact with Mr. A. J. Hiller of the Naval Research Laboratory indicated that it should not only be possible to obtain the desired characteristics, but that it should be possible to alter the

characteristics slightly by varying the amount of resistance in a simple series resistance and germanium diode circuit.

The plot of a 1N34 crystal diode characteristic curve is a straight line on a log log plot over a large range of values. A straight line on log log paper may be represented by the equation $Y = aX_m$. Hence, the equation of the curve is

$$E = aI^m \quad \text{Eq. (1)}$$

The circuit for indicating these characteristics is shown in Figure 3.

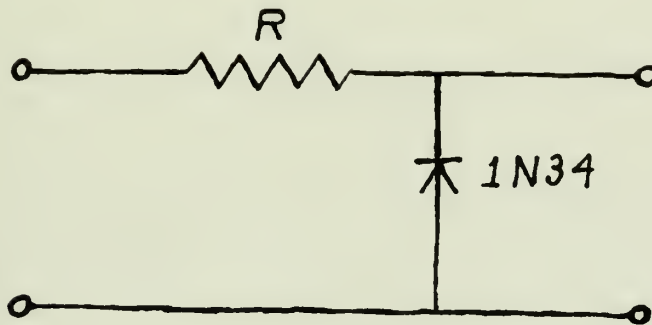


Figure 3

Circuit for obtaining characteristics of Equation 1.


If R is much greater than the resistance of the 1N34 diode, then

$$E_{\text{out}} = aI^m = a\left(\frac{E_{\text{in}}}{R}\right)^m \quad \text{Eq. (2)}$$

Hence, the output voltage is proportional to some power, m , of the input voltage, giving us a function of the desired form.

In order to obtain symmetrical response on both excursions of the input wave, it is necessary to use a back-to-back arrangement

The circuit is shown in Figure 1. The input voltage is V_{in} and the output voltage is V_{out} . The circuit consists of a resistor R_1 and a resistor R_2 connected in series. The input voltage V_{in} is applied across the series combination of R_1 and R_2 . The output voltage V_{out} is measured across R_2 . The current flowing through the circuit is I . The voltage across R_1 is V_1 and the voltage across R_2 is V_2 . The total resistance is $R_{total} = R_1 + R_2$. The current I is given by $I = \frac{V_{in}}{R_{total}}$. The output voltage V_{out} is given by $V_{out} = I R_2 = \frac{V_{in} R_2}{R_1 + R_2}$.

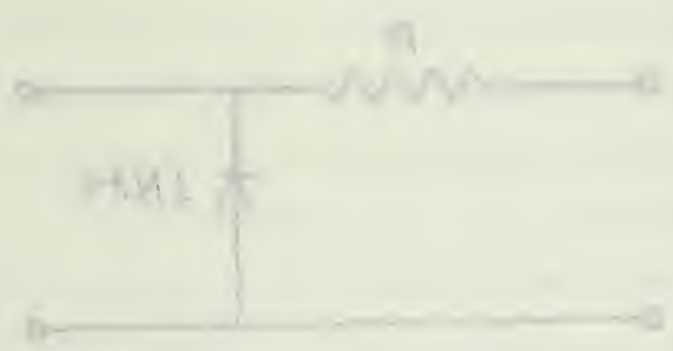

The circuit is shown in Figure 1. The input voltage is V_{in} and the output voltage is V_{out} . The circuit consists of a resistor R_1 and a resistor R_2 connected in series. The input voltage V_{in} is applied across the series combination of R_1 and R_2 . The output voltage V_{out} is measured across R_2 . The current flowing through the circuit is I . The voltage across R_1 is V_1 and the voltage across R_2 is V_2 . The total resistance is $R_{total} = R_1 + R_2$. The current I is given by $I = \frac{V_{in}}{R_{total}}$. The output voltage V_{out} is given by $V_{out} = I R_2 = \frac{V_{in} R_2}{R_1 + R_2}$.

of the crystal diodes, as shown in Figure 4.

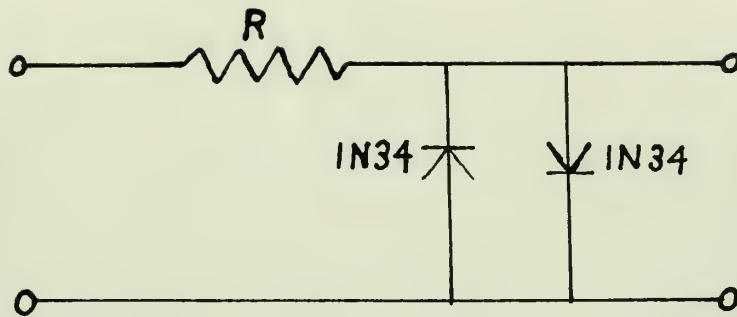


Figure 4

Circuit for obtaining symmetrical response corresponding to Equation 2.

It is necessary, of course, that the $1N34$'s be matched. The circuit for selecting matched crystals is shown in Figure 5.

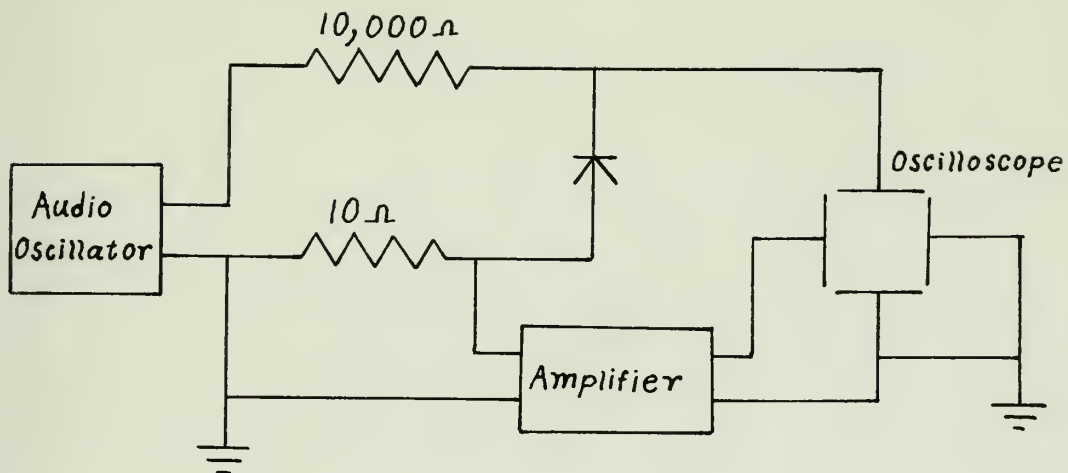


Figure 5.

Circuit for selecting matched crystal diodes

The voltage developed across the 10 ohm resistor is proportional to the current through it. Since 10 ohms is much lower than the resistance of the 1N34 diode at any point in its characteristic curve, the 10 ohm resistor does not appreciably affect the total amount of voltage between point "A" and ground. Thus, the characteristics of the 1N34 diode in series with the 10 ohm resistor are the same as for the 1N34 diode by itself.

Since the horizontal deflection voltage is proportional to the current through the 1N34 and the vertical deflection is proportional to the voltage impressed across the 1N34, a characteristic curve is displayed on the oscilloscope. Several diodes were then tried until two were found having an identical characteristic curve over the desired range. Several matched pairs were then found. It is, of course, unlikely that any two sets would have identical characteristics.

The diodes were then connected in an arrangement as shown in Figure 6 and the characteristics of this circuit plotted. Several values of R were tried. Best performance seemed to be obtained with $R = 10K$.

Using crystal set # 1, this gave a value of m that varied from 0.366 with $R = 0$ to $m = 0.577$ with $R = 500$ ohms.

In general, the curves follow a specific exponential relation to within 10% over about a 40 db range. Considering that the measuring equipment used had a maximum probable error of 3% of full scale, this is considered satisfactory. A log log plot of E_{out} vs. E_{in} is shown in Figure 7, 8, 9, 10, 11, and 12.

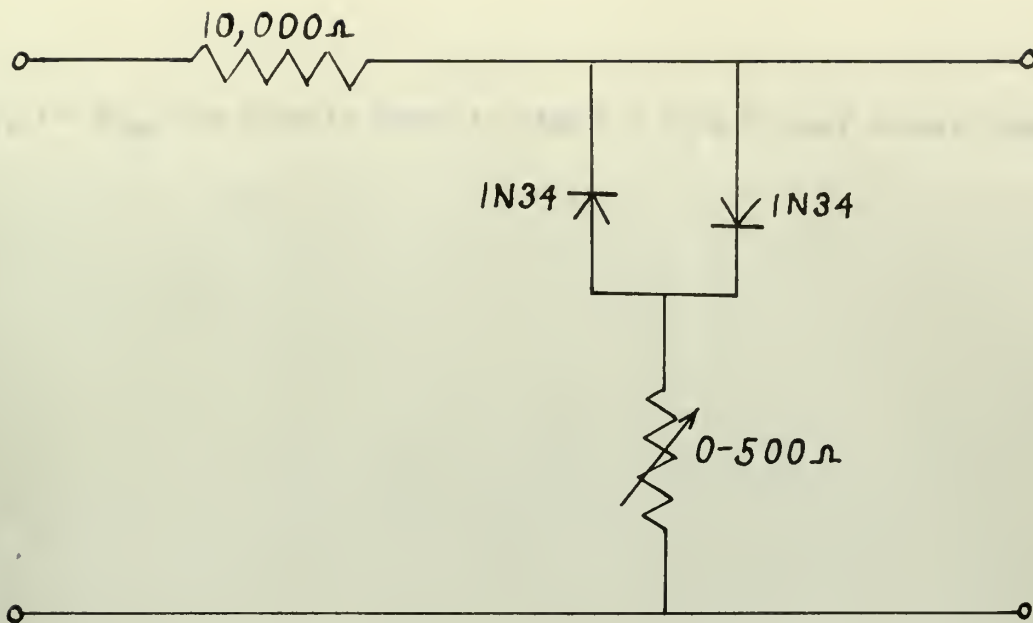


Figure 6

Circuit for obtaining a response corresponding to Equation 2 with m variable over a limited range.

As can be seen from the curves, it is necessary that an amplifier having the proper gain precede the unit in order that the speech signal will have the proper level for the operating range. The center of the operating range shifts slightly with different values of R .

Units of the type shown in Figure 6 have an insertion loss that remains constant at about 13 db as R is varied.

Figure 13 shows a plot of m vs. R .

The conclusions to be drawn regarding a circuit of the type shown in Figure 6 are that the circuit will operate satisfactorily to obtain a value of m in the order of 0.5 and, hence, can be used in the proposed transmitting end amplifier system. The insertion loss is tolerable and can easily be compensated. The operating range, while not ideal, appears to be better than other simple power law devices.

In designing the receiving end amplifier, there are two methods by which one may perform the inverse operation. The first method consists of using a circuit of the type shown in Figure 14.

E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to zero ohms

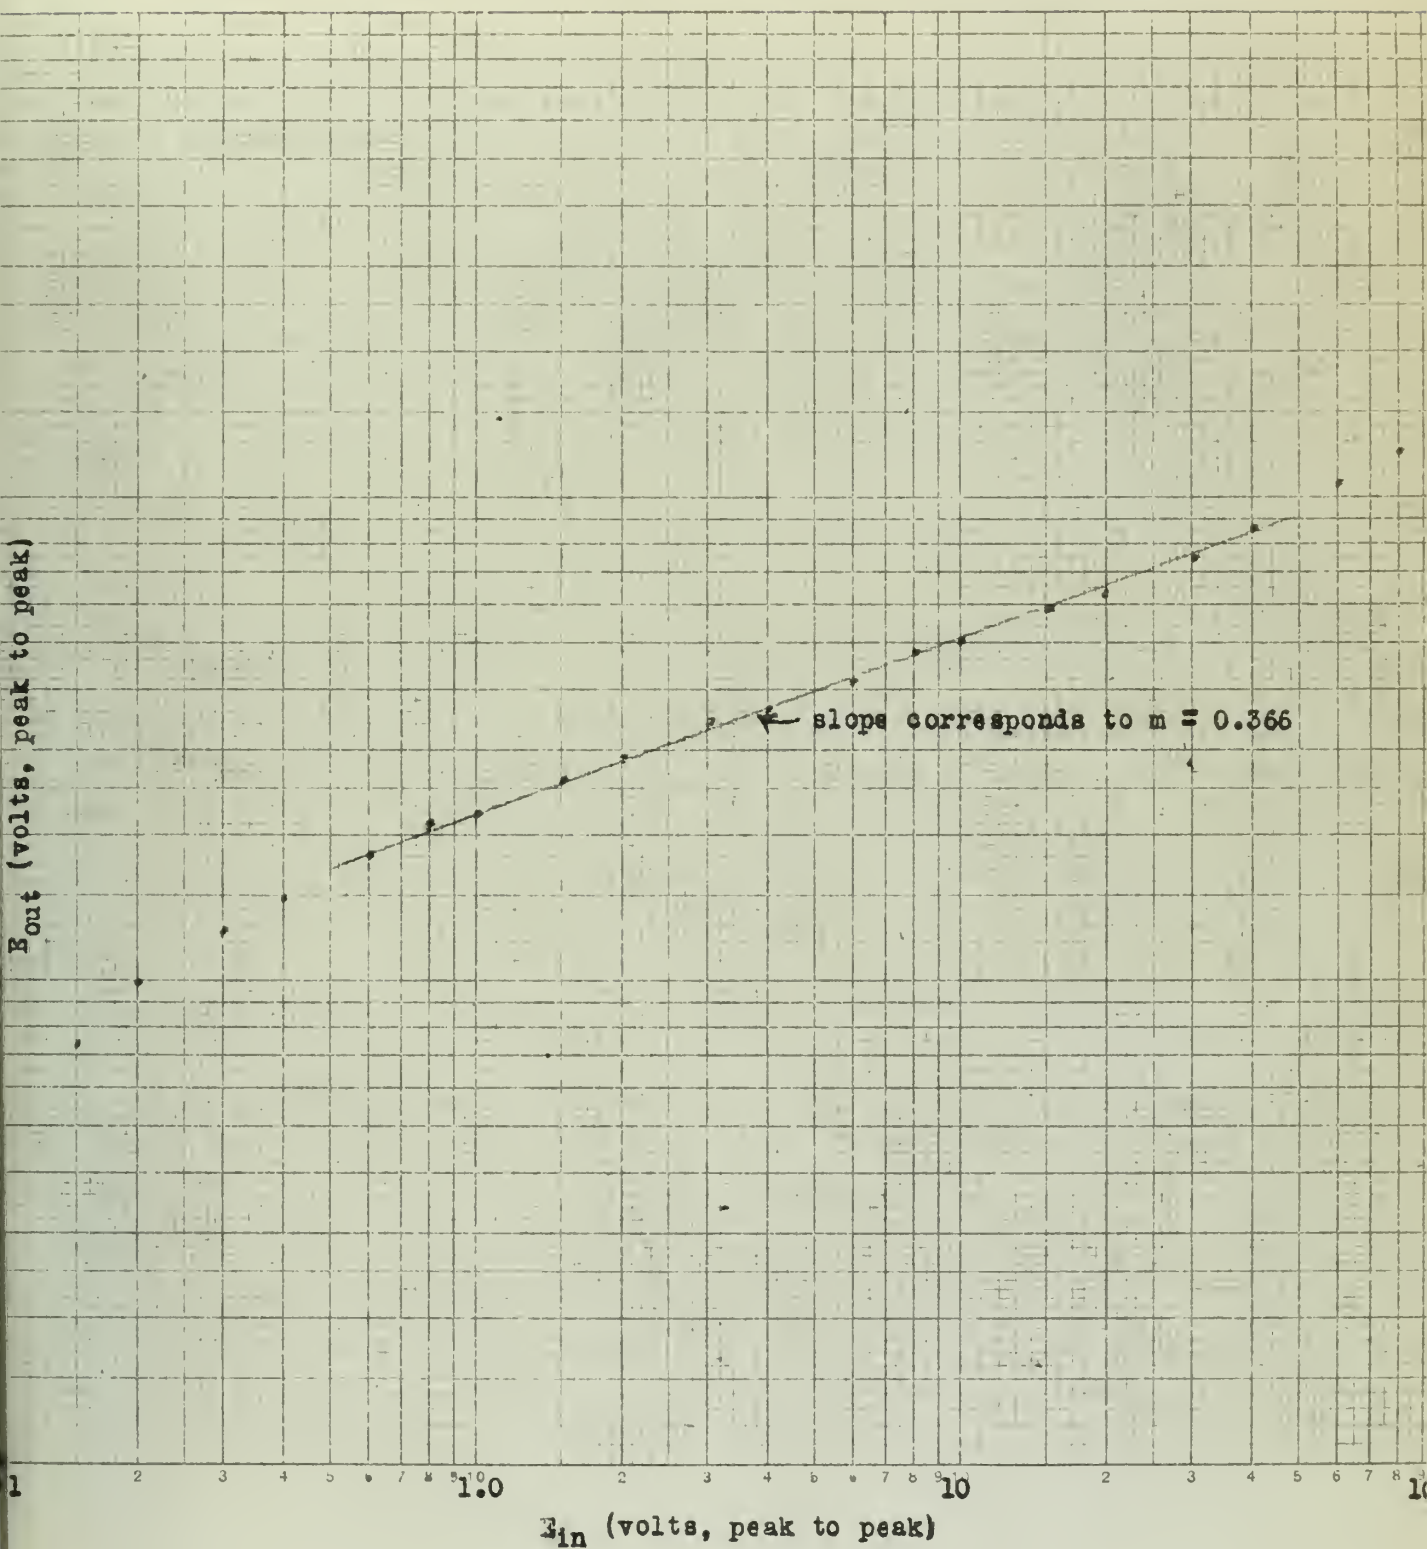


Figure 7

E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to 100 ohms

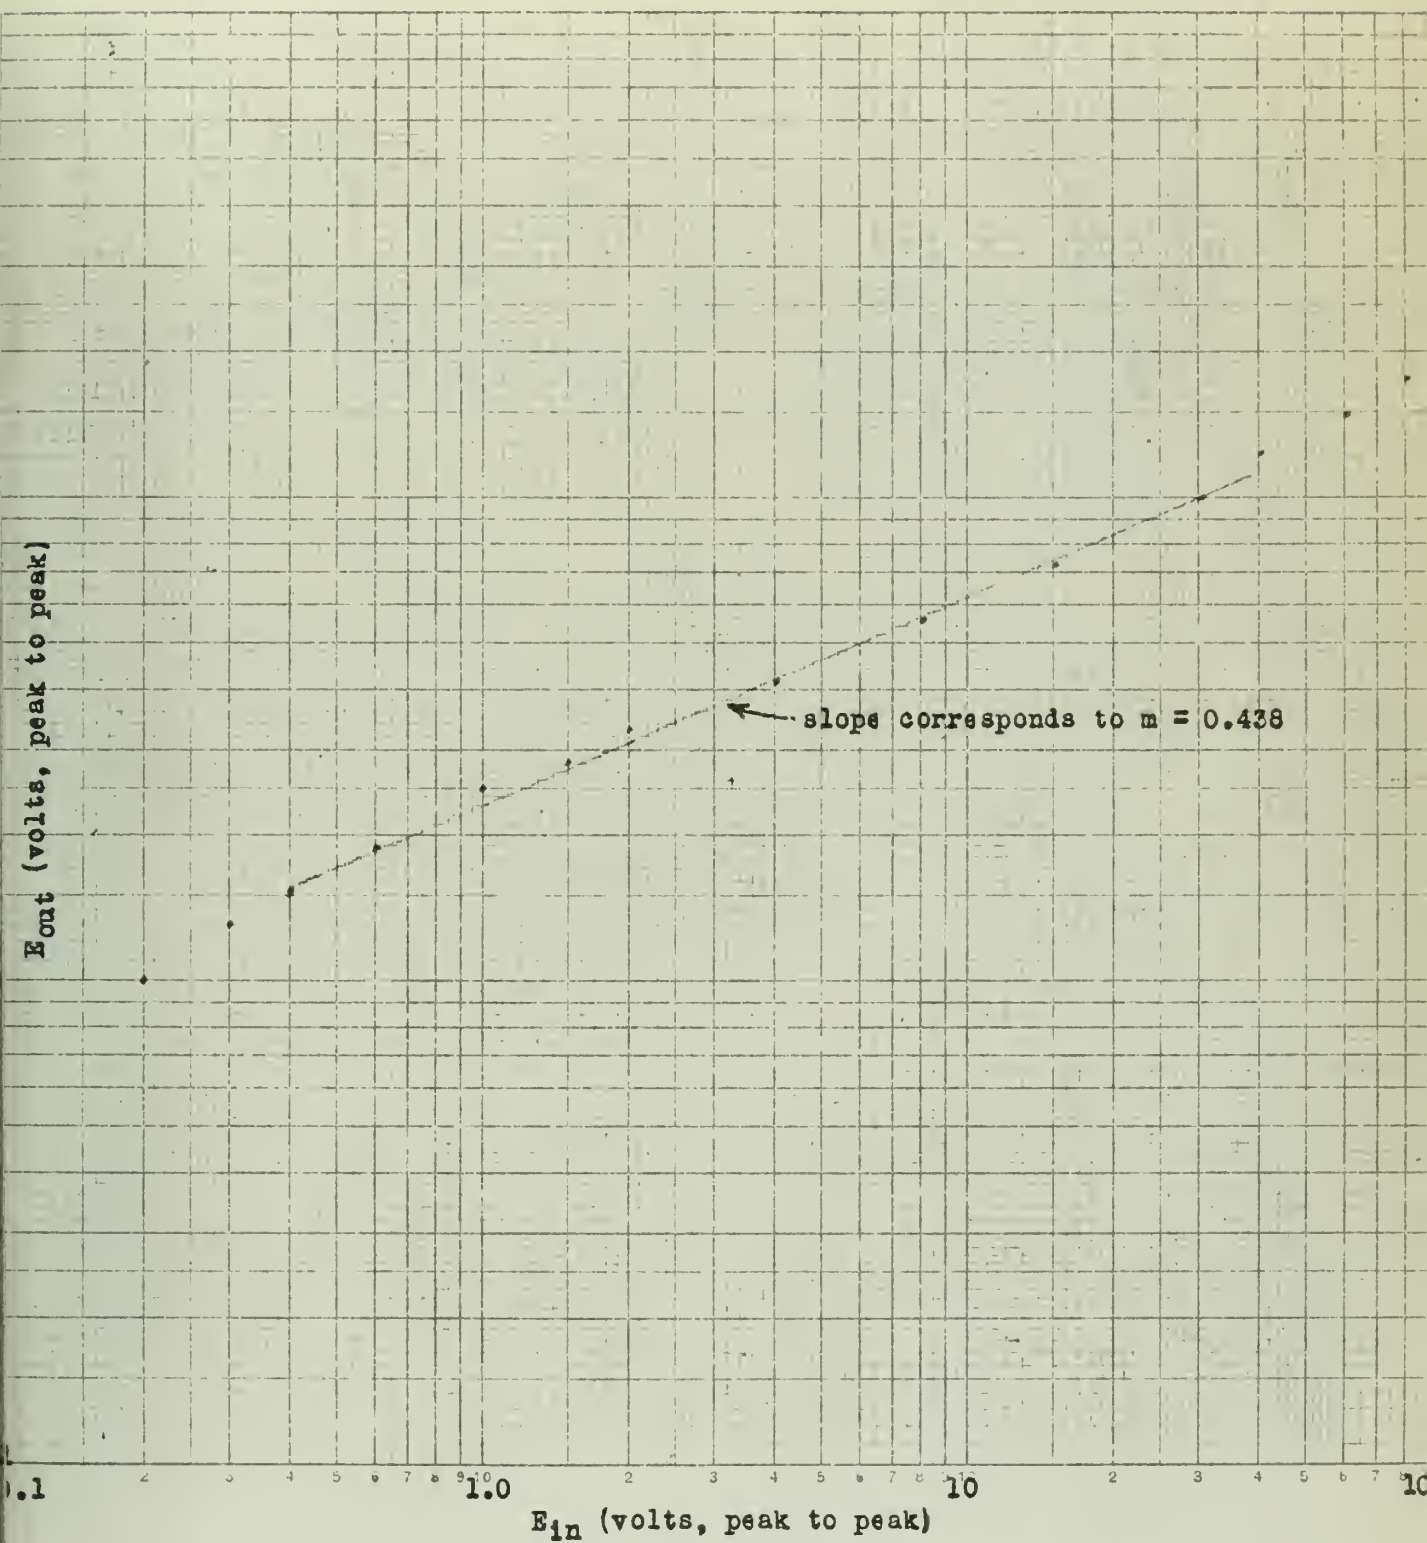


Figure 8

E_{in} vs. E_{out} for circuit shown Figure 6 with R equal to 200 ohms

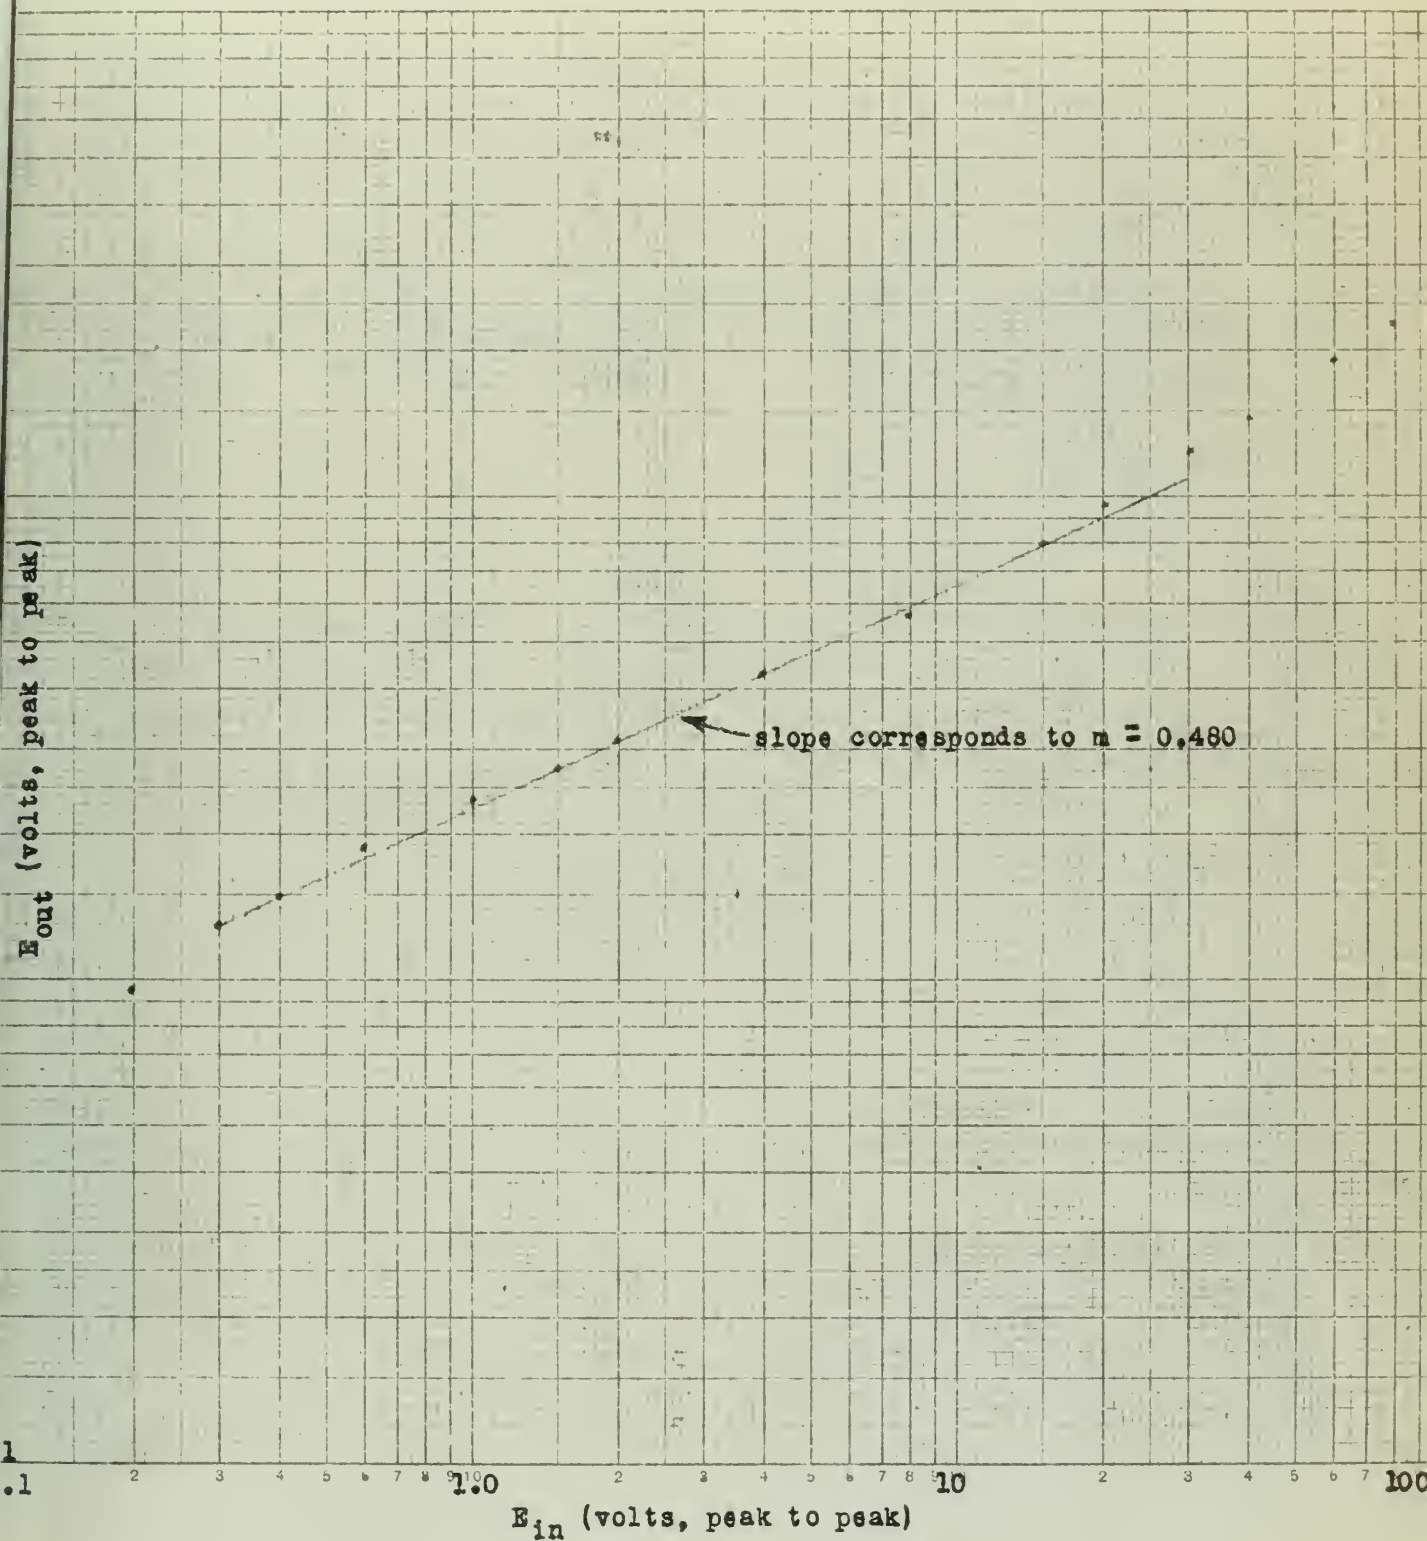


Figure 9

E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to 300 ohms

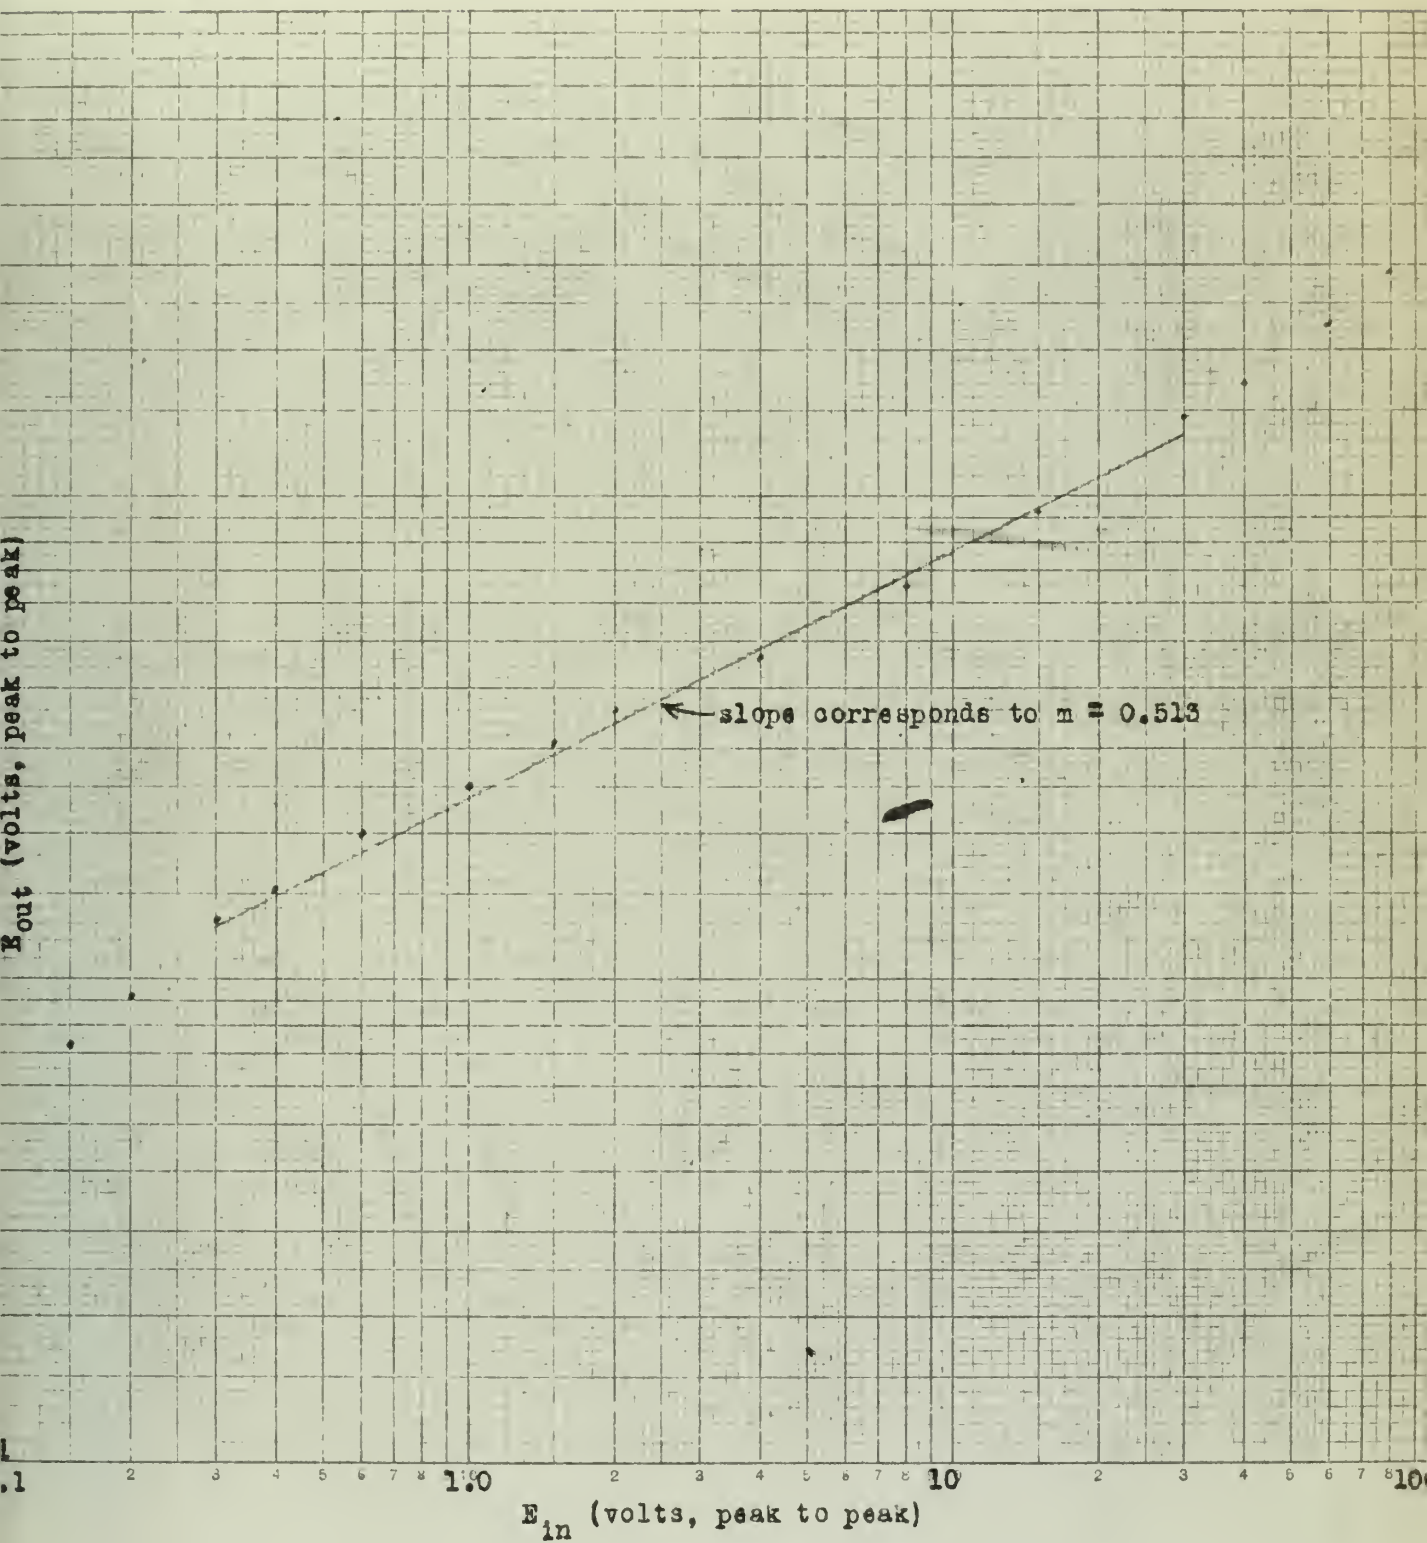


Figure 10

E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to 400 ohms

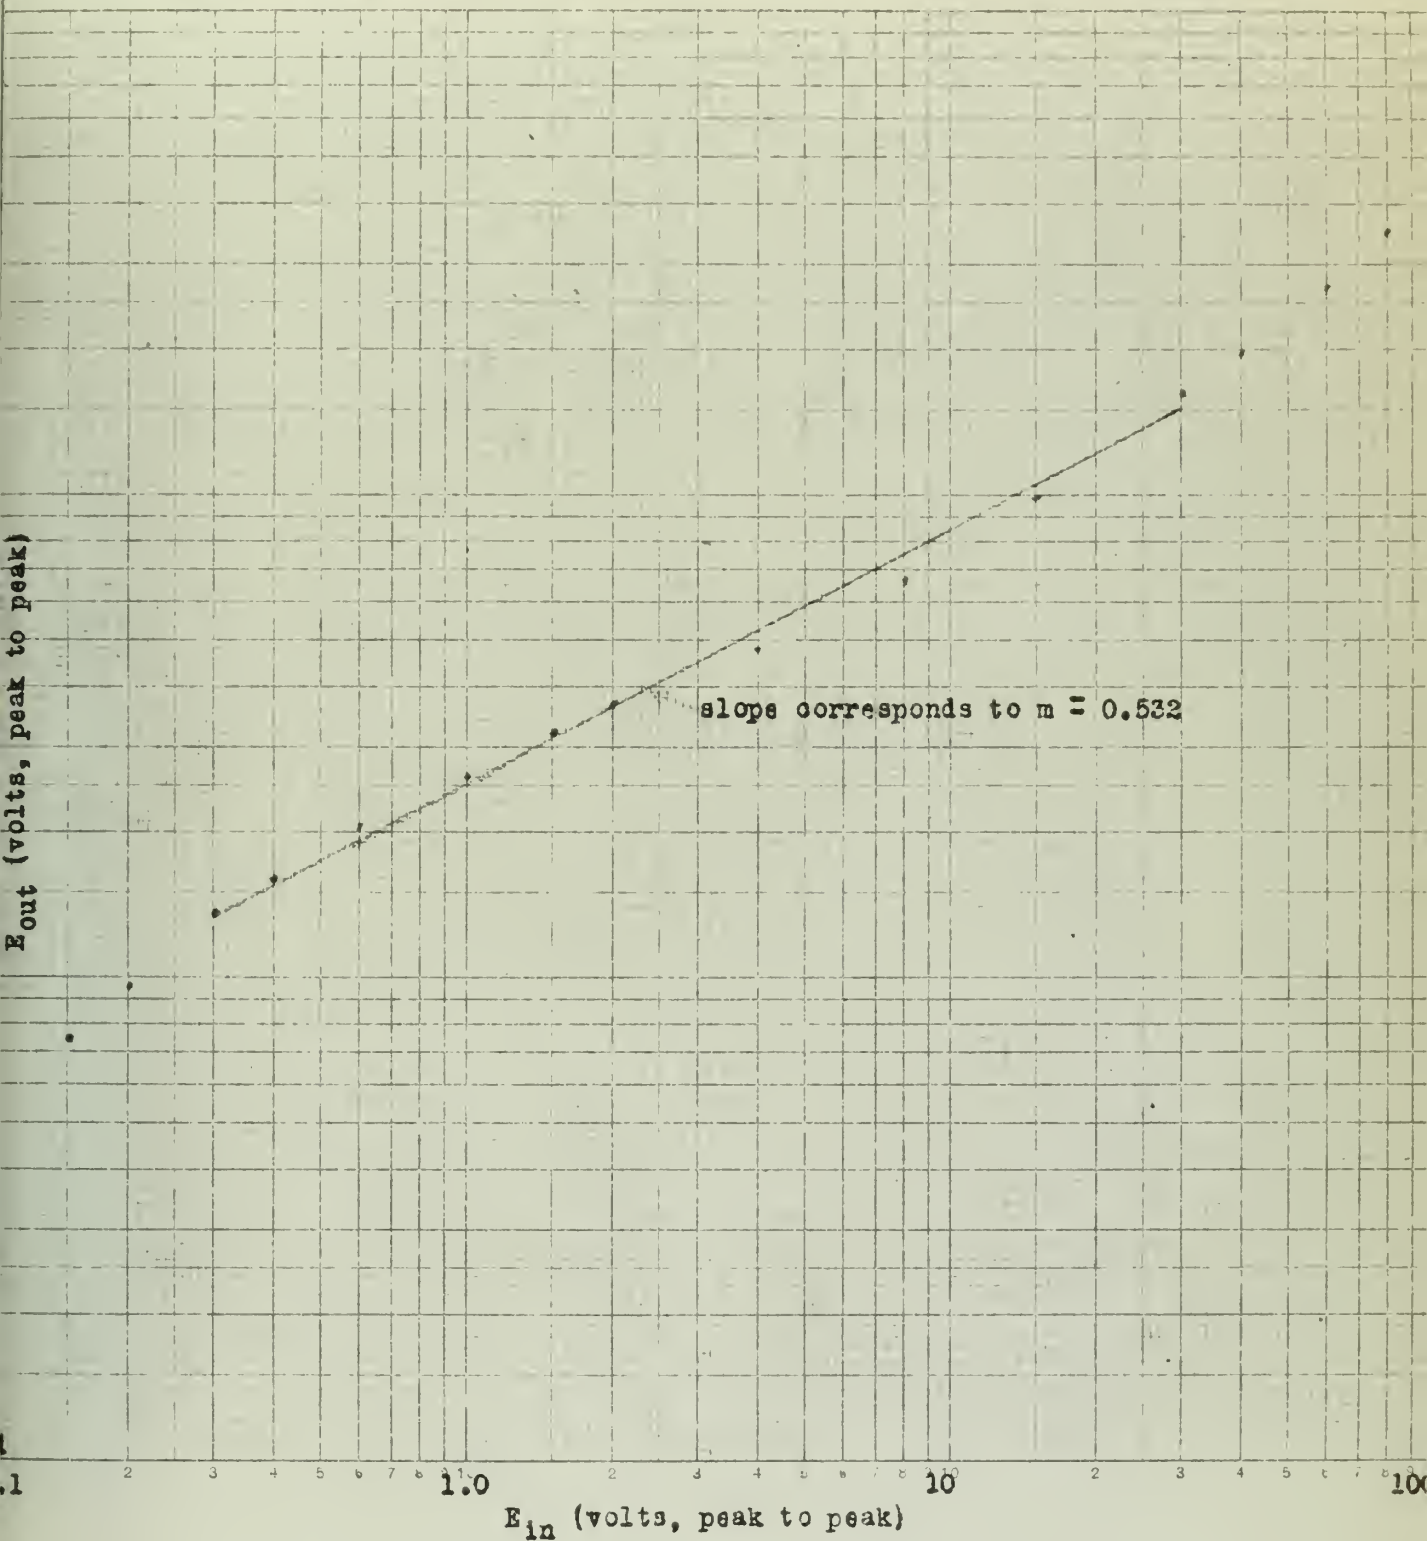


Figure 11

E_{in} vs. E_{out} for circuit shown in Figure 6 with R equal to 500 ohms

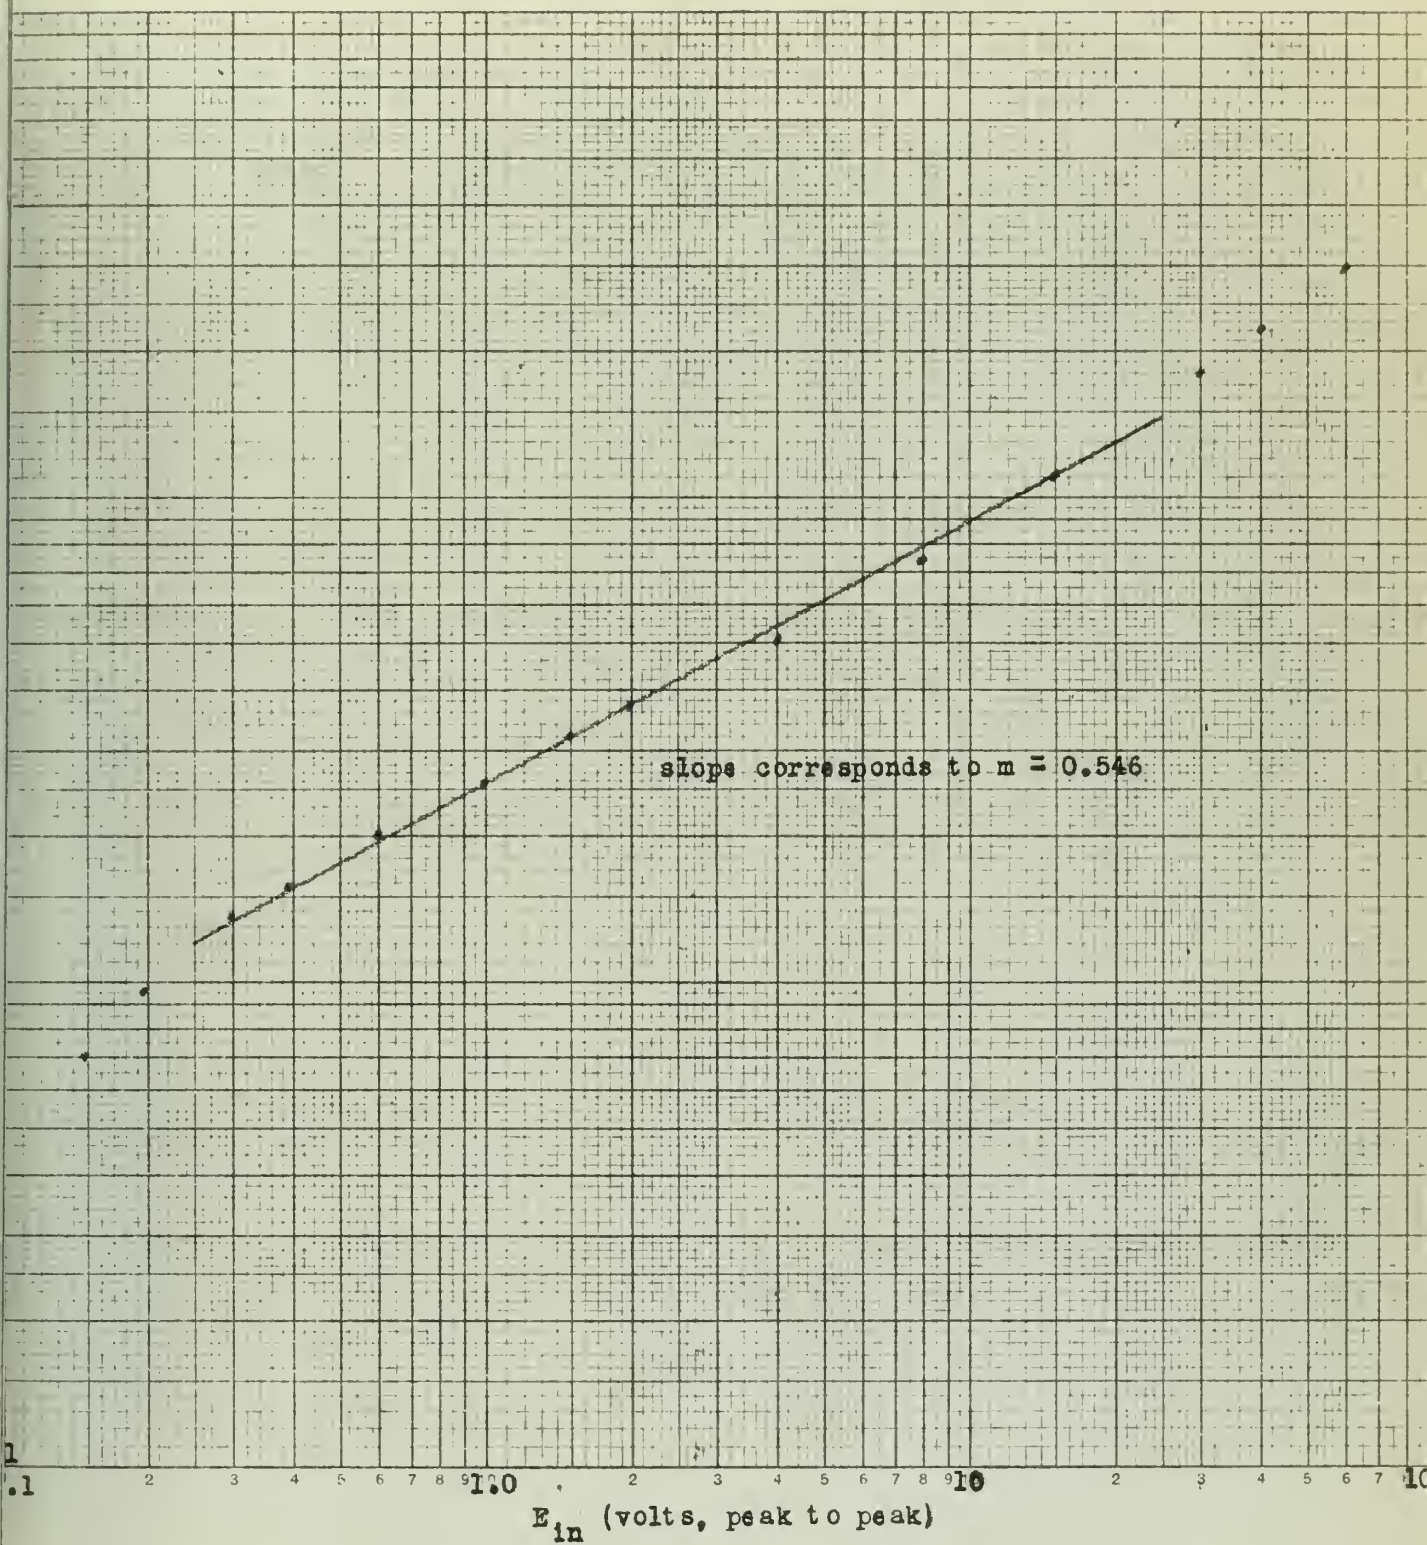


Figure 12

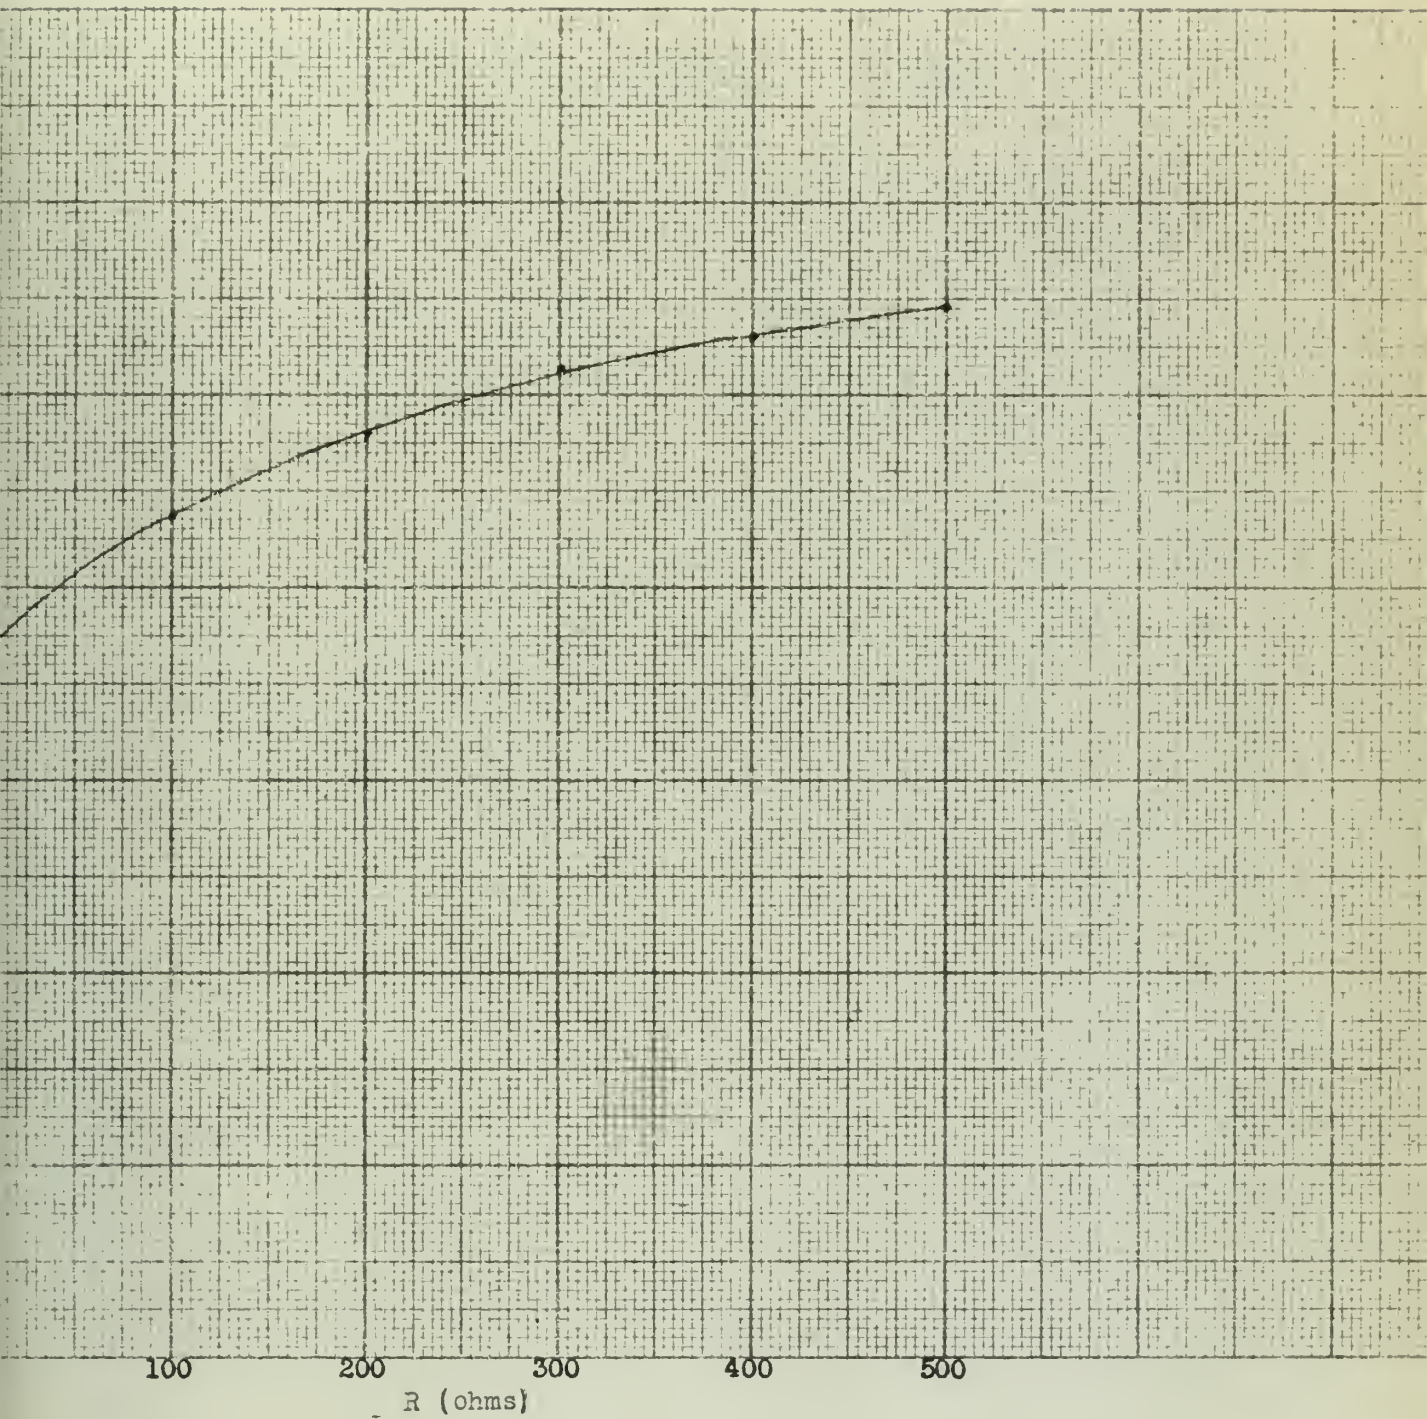


Figure 13.

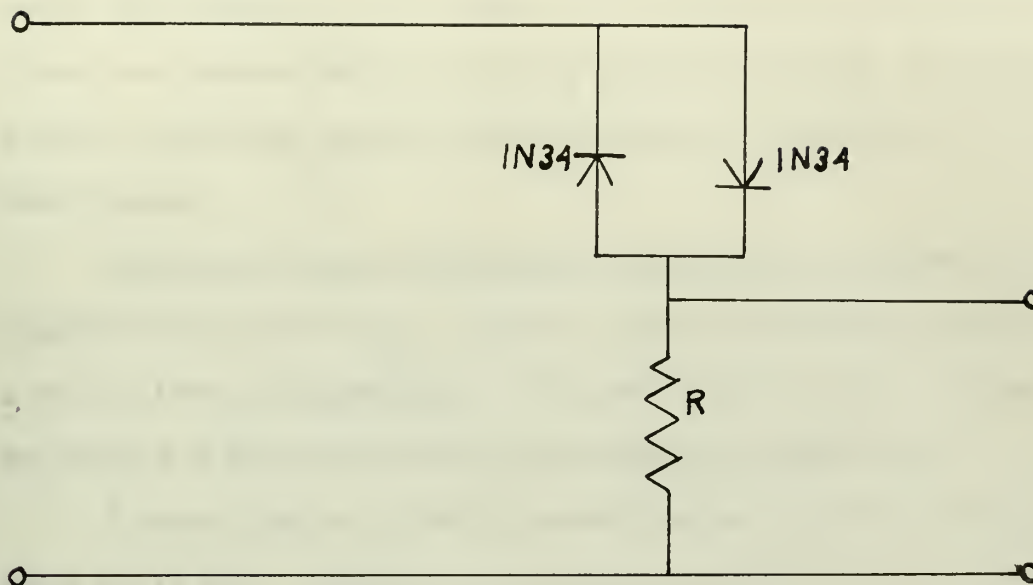


Figure 14.

Circuit for obtaining a response corresponding to Equation 4.

If the resistance R is much less than the resistance of the diodes, then by comparison with Equation 1,

$$I = \left(\frac{E_{in}}{a} \right)^{\frac{1}{m}} \quad \text{Eq. (3)}$$

However,

$$E_{out} = IR$$

Therefore,

$$E_{out} = R \left(\frac{E_{in}}{a} \right)^{\frac{1}{m}} \quad \text{Eq. (4)}$$

giving us the desired inverse function.

The circuit shown in Figure 14, however, has the disadvantage of having a rather low input impedance. Furthermore, since it is a non-linear device, this impedance varies. During the peak of the audio

cycle, this impedance will reduce to the order of a few hundred ohms. If one is to prevent this low varying load from causing distortion in the source, the source output impedance must be something less than about thirty ohms.

The value of source impedance can easily be obtained from a transformer output stage. However, before attempting to feed such a circuit from a transformer, due consideration should be given to the effects of phase distortion as discussed in Chapter III.

A bench type set-up of the arrangement was tried and found to work fairly well. However, with sinusoidal input to the overall system, distortion of the output wave became very noticeable below about 400 cycles as the result of the phase distortion within the system.

The second method of performing the inverse operation has a high impedance input and is not as susceptible to phase distortion effects. It consists of using a circuit of the type shown in Figure 6 in a high gain inverse feedback loop. A block diagram of the arrangement is shown in Figure 15.

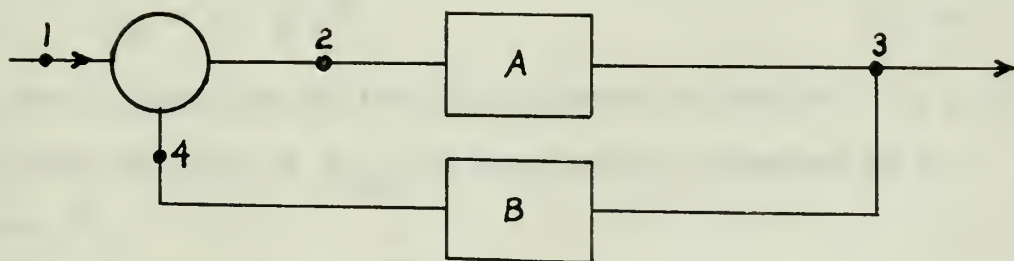


Figure 15.
Block diagram of arrangement for obtaining a response corresponding to Equation 4 utilizing a high gain inverse feedback loop where B contains the circuit of Figure 6, and A indicates the gain between points 2 and 3.

From Figure 15,

$$e_3 = A e_2 \quad \text{Eq. (5)}$$

$$e_2 = \frac{e_3}{A} \quad \text{Eq. (6)}$$

By inspection of Figure 15 and Equations (2) and (5),

$$e_4 = a \left(\frac{A e_2}{R} \right)^m$$

$$e_2 = e_1 - e_4 = e_1 - a \left(\frac{A e_2}{R} \right)^m$$

$$\frac{e_3}{e_1} = \frac{e_3}{\frac{e_3}{A} + a \left(\frac{e_3}{R} \right)^m} = \frac{A}{1 + A a (e_3)^{m-1} \left(\frac{1}{R} \right)^m}$$

If $A a (e_3)^{m-1} \left(\frac{1}{R} \right)^m$ is made much greater than unity,

$$\frac{e_3}{e_1} = \frac{A}{A a (e_3)^{m-1} \left(\frac{1}{R} \right)^m} = \frac{1}{a (e_3)^{m-1} \left(\frac{1}{R} \right)^m} \quad \text{Eq. (7)}$$

$$e_3 = R \left(\frac{e_1}{a} \right)^{\frac{1}{m}}$$

$$e_3 = R \left(\frac{e_1}{a} \right)^{\frac{1}{m}} \quad \text{Eq. (8)}$$

This is precisely the function we desire to perform. To prove this, insert the value of E_{out} as determined by Equation (2) in Equation (8)

$$e_3 = R \frac{\frac{a (E_{\text{in}})^m}{R^m}}{a} = E_{\text{in}}$$

Since e_3 is the output voltage of the system shown in Figure 15, this system has performed the exact inverse of the unit shown in Figure 6, giving us an output voltage identical with the voltage at the input of the system.

In order to determine a suitable value of A to validate Equation (7), assume

$$A a (e_3)^{m-1} \left(\frac{1}{R}\right)^m \geq 100 \quad \text{Eq. (9)}$$

Equation 9 now becomes

$$A(240) (1/R)^m = 100 (e_3)^{0.5}$$

$$A \geq \frac{100(e_3)^{0.5}}{(240) (1/R)^m}$$

From Figure 6, $R = 10,000$ ohms. Letting $m = 0.5$ and using Equation (2) and Figure 10

$$a/(10^4)^m = 0.24$$

$$a = 240$$

Figure 10 indicates that the largest value of e_3 will be about 36 volts.

Substituting in Equation (9)

$$A (240) (1/6) (1/100) = 100$$

$$A = 2,500$$

A test bench type set-up of this arrangement was made and found to

work satisfactorily. Most of the results indicated in Chapter IV were obtained from this bench type lay out.

The main difficulty with this second method of performing the inverse operation is preventing oscillations. Due to the high gain inverse feedback loop, it is difficult to prevent phase shifts from causing the feedback to become positive feedback at some frequency, and hence cause these oscillations. To prevent phase shifts from accumulating around the feedback loop, one should design the amplifier so that only one stage of the feedback loop is predominant in restricting the pass-band characteristics of the loop. That is, one stage should have only the minimum pass-band characteristics, whereas all other stages should have much wider pass-band characteristics.

A schematic diagram for a complete transmitter amplifier and receiver amplifier arrangement is shown in Figure 16.

THE UNIVERSITY OF CHICAGO
DIVISION OF THE PHYSICAL SCIENCES
DEPARTMENT OF CHEMISTRY
5301 SOUTH CAMPUS DRIVE
CHICAGO, ILLINOIS 60637
U.S.A.
TEL: (312) 937-1234
FAX: (312) 937-1234
E-MAIL: chem@uchicago.edu
WWW: www.uchicago.edu/chem

Proposed Circuit Schematic for Compressing Amplifier and Expanding Amplifier

All values given in either
kilohms or microfarads, unless
otherwise stated.

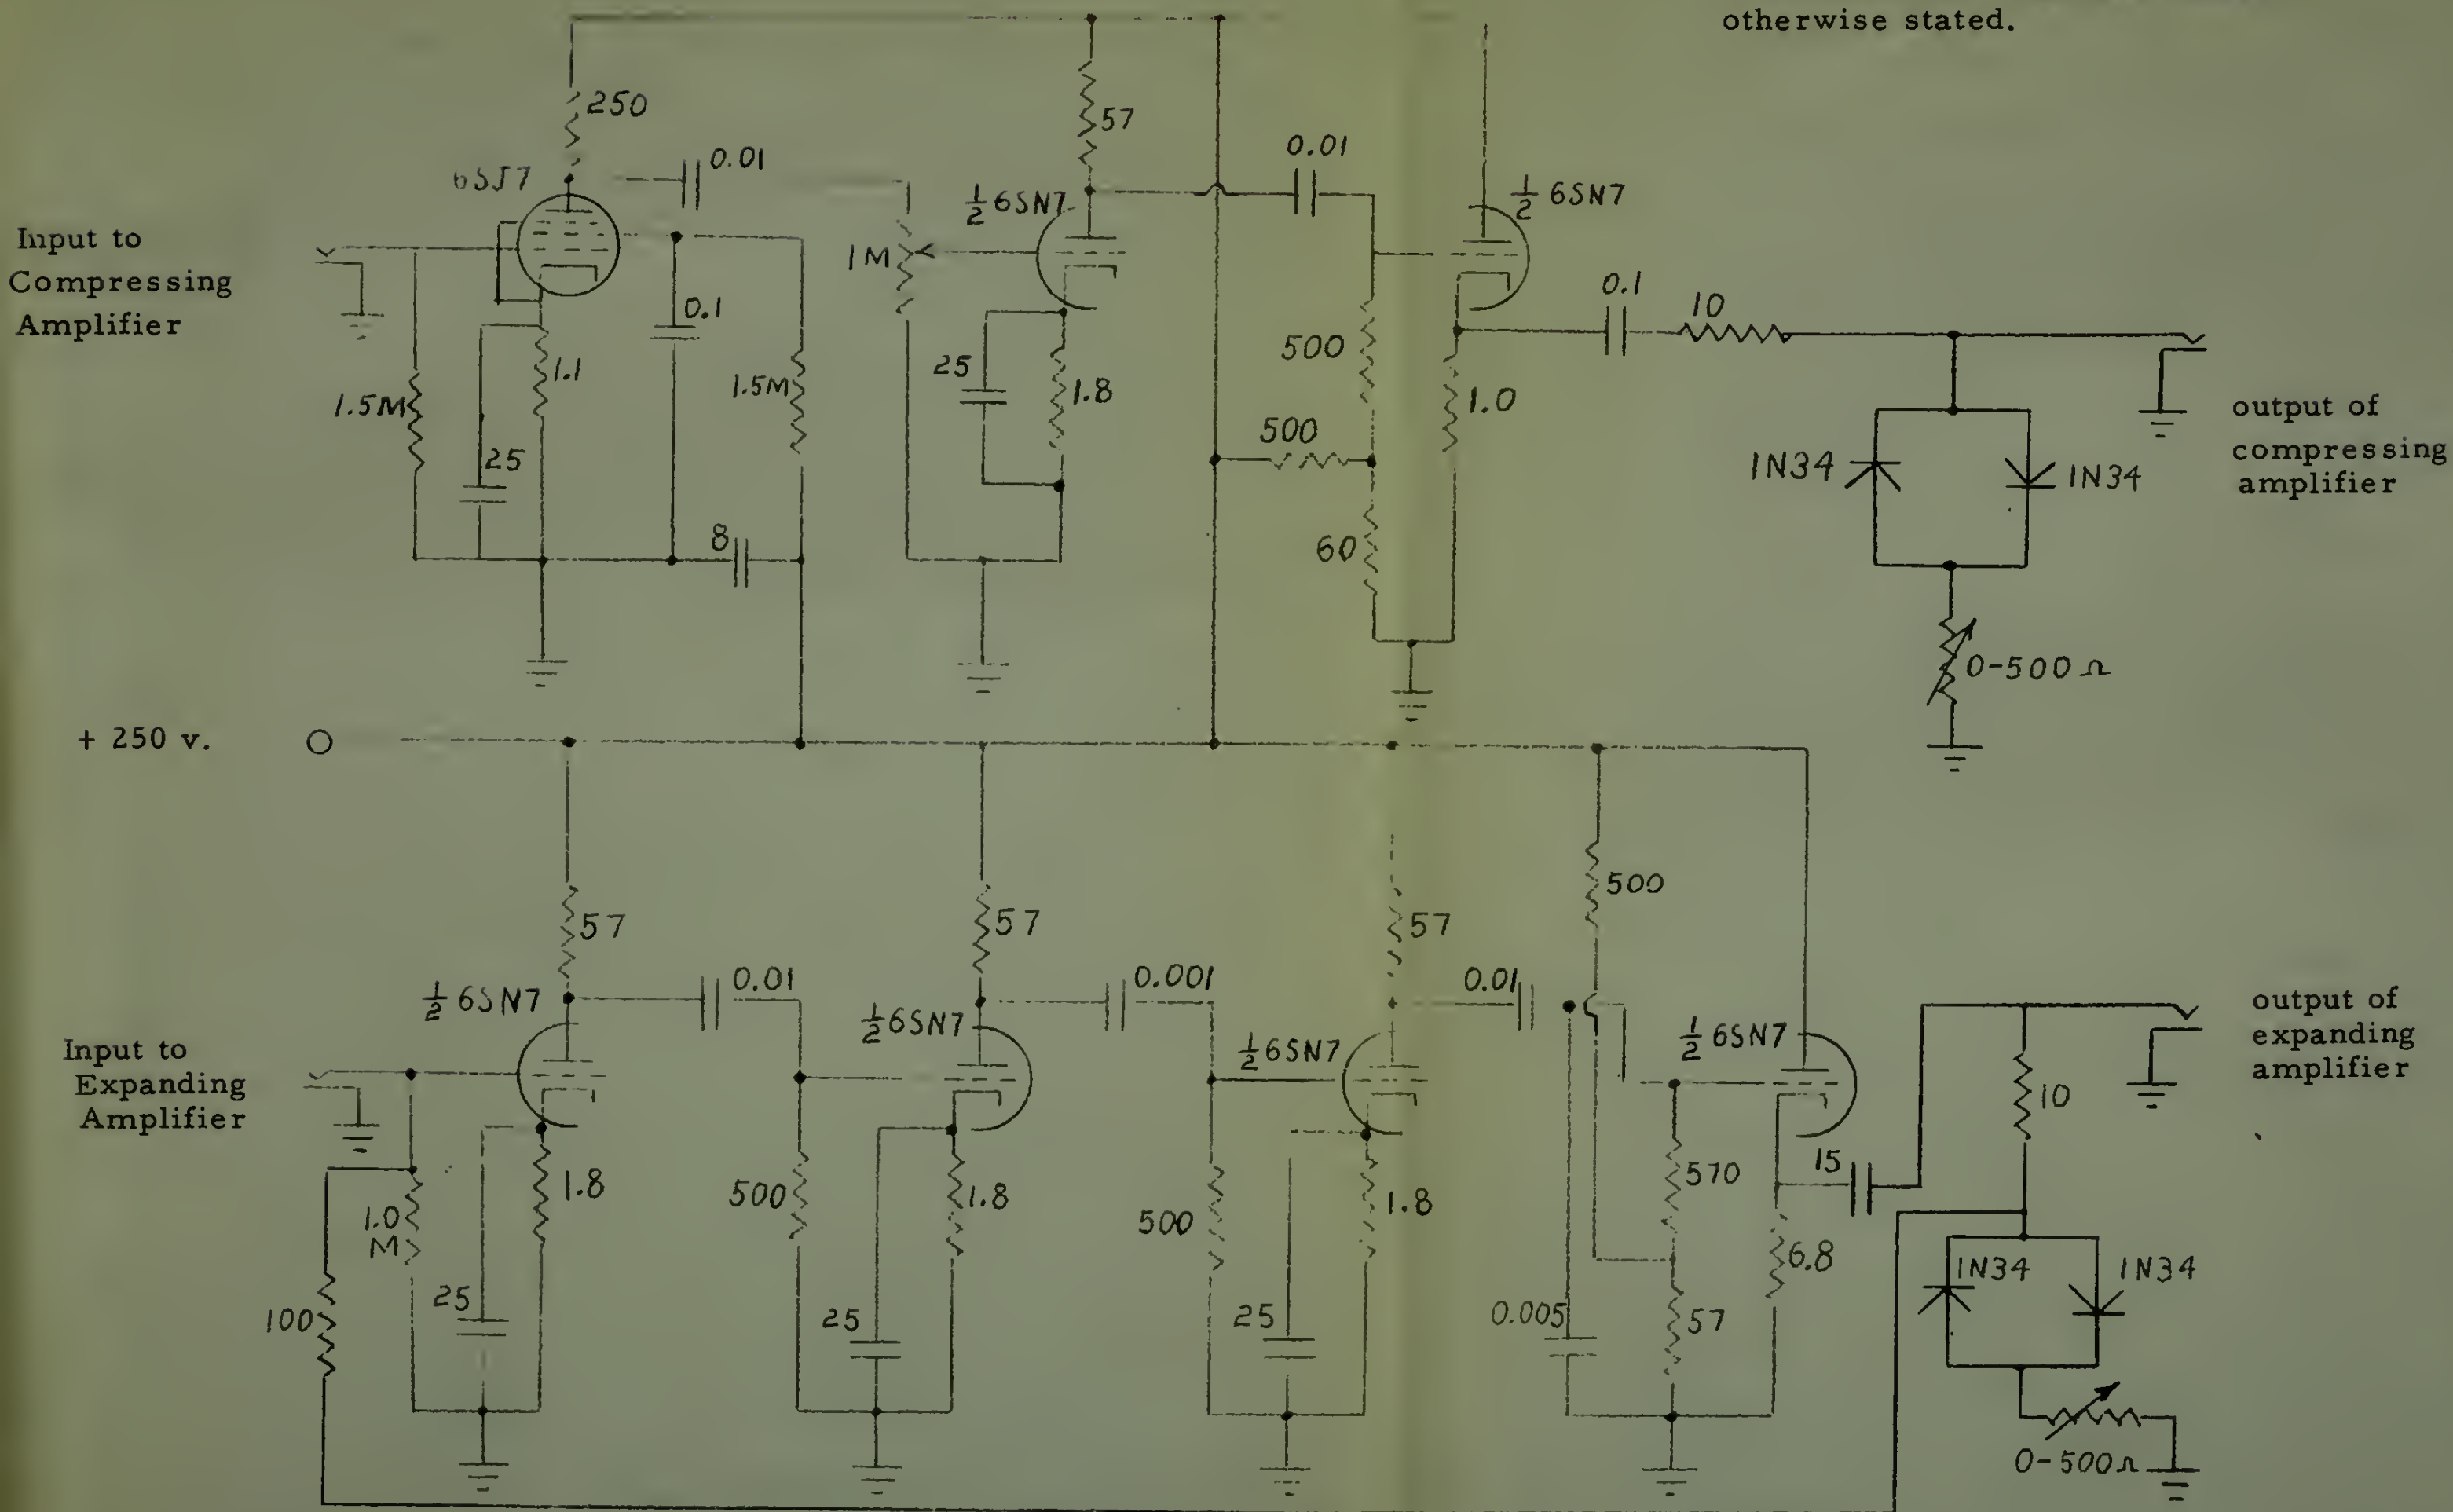


Figure 16

CHAPTER III

MATHEMATICAL ANALYSIS OF CIRCUIT OPERATION

In this chapter, an analysis is made of the operation of the transmitting end amplifier. It is the purpose of this chapter to mathematically determine how distortion of the compressed wave affects the resultant wave after expansion in order that the effects of frequency distortion and phase distortion within the system can be determined. Because of the non-linearities of the system, it is difficult if not impossible to determine any functional relationship for distortion in the output wave caused by distortion between the unit performing the "half-power" function and the unit performing the inverse operation. Consequently, the analysis is made on the basis of a specific amount of distortion occurring within the system.

Although, in general, analysis of any system containing non-linear elements on the basis of any particular wave such as a cosine wave is of problematical value in discussing speech distortion, it is felt that in this case some valuable information can be obtained by utilizing a cosinusoidal input wave. However, a Fourier analysis for the case of a cosinusoidal wave input becomes overly complicated after the first few terms. A Fourier analysis through the fifth harmonic for the compressed cosine wave is shown in Appendix I.

The cosine wave is converted into a wave of the type shown in Figure 17.

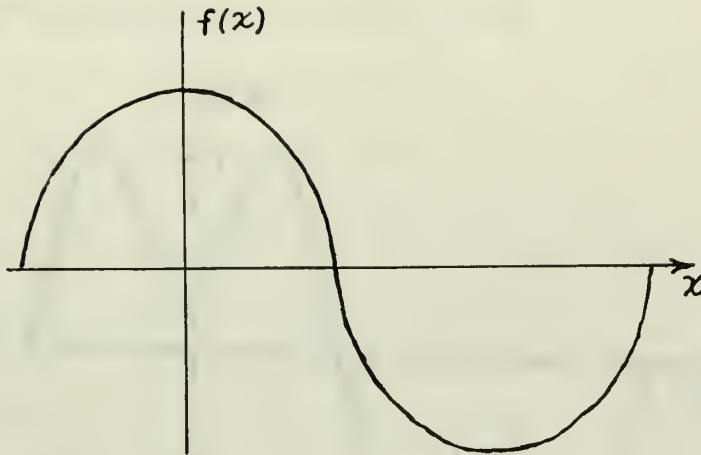


Figure 17

Plot of compressed cosine wave.

The curve of Figure 17 may also be described by the function,

$$f(x) = \left| \frac{\sqrt{|\cos x|}}{\cos x} \right| \cos x$$

As is shown in Appendix I, a wave form of the type shown in Figure 10 has a Fourier Series of the form

$$f(x) = A_1 \cos x + A_3 \cos 3x + A_5 \cos 5x + \dots + A_n \cos nx$$

Hence, for simplicity, let us assume that we have a wave form of the type

$$f(x) = A \cos x + B \cos 3x \quad \text{Eq. (1)}$$



QUESTION 10

Consider the function $f(x) = \sin(x)$ on the interval $[-\pi, \pi]$.

Which of the following is the graph of the function $f(x)$ on the interval $[-\pi, \pi]$?

$$f(x) = \begin{cases} \sqrt{\cos(x)} & \text{if } x \in [-\pi, \pi] \end{cases}$$

Which of the following is the graph of the function $f(x)$ on the interval $[-\pi, \pi]$?

Which of the following is the graph of the function $f(x)$ on the interval $[-\pi, \pi]$?

$$f(x) = \begin{cases} \sqrt{\cos(x)} & \text{if } x \in [-\pi, \pi] \end{cases}$$

Which of the following is the graph of the function $f(x)$ on the interval $[-\pi, \pi]$?

ANSWER 10

$$(1) \rightarrow (2)$$

$$f(x) = \begin{cases} \sqrt{\cos(x)} & \text{if } x \in [-\pi, \pi] \end{cases}$$

appearing at the output of the compressing amplifier. Depending on the magnitude of the third harmonic component, this would have a form similar to the solid curve of Figure 18.

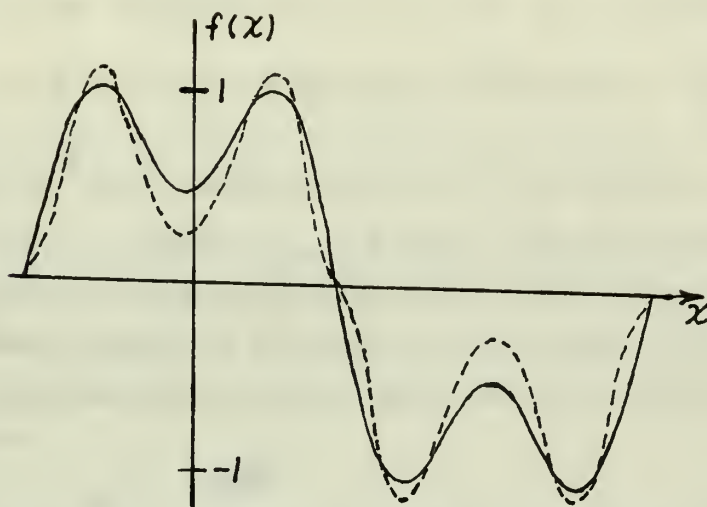


Figure 18

Waveform at output of transmitting end amplifier with input wave form of the type described by Equation 1 of Chapter III; Solid curve represents a typical waveform of the type described by Equation 1. Dashed curve is a plot of the same waveform after passing through the transmitting end amplifier

When this is passed through the amplifier performing the "squaring" function, we obtain a wave form of the type shown by the dashed curve of Figure 18.

One might expect that when a wave form of the type indicated by Equation (1) is passed through the amplifier performing the squaring function, we would obtain a waveform described by

$$\frac{2}{f(x)} = A^2 \cos^2 x + 2AB \cos x \cos 3x + B^2 \cos^2 3x \quad \text{Eq. (2)}$$

However, the amplifier performing the squaring function retains

the sign of the function being squared, i.e., when $f(x)$ becomes negative, $\frac{f(x)^2}{f(x)}$ also becomes negative.

Nevertheless, Equation (2) does hold if we assign the power limits, and provided B is less than A . Letting $F(x)$ refer to the output of the amplifier performing the squaring function, then

$$F(x) = + (A^2 \cos^2 x + 2AB \cos x \cos 3x + B^2 \cos^2 3x); \quad -\frac{\pi}{2} < x < \frac{\pi}{2} \quad \text{Eq. (3)}$$

$$F(x) = - (A^2 \cos^2 x + 2AB \cos x \cos 3x + B^2 \cos^2 3x); \quad \frac{\pi}{2} < x < \frac{3\pi}{2} \quad \text{Eq. (4)}$$

Now, then, by performing a Fourier analysis between these limits, it is possible to determine the nature and extent of the harmonics that should appear at the output of the system. This periodic non-sinusoidal wave may be represented by a Fourier Series as follows:

$$f(x) = \frac{A_0}{2} + \sum_{n=1}^{n=\infty} (A_n \cos 2n \frac{\pi}{T} x + B_n \sin 2n \frac{\pi}{T} x) \quad \text{Eq. (5)}$$

where if C is any constant, and P is the period of the wave,

$$A_n = \frac{2}{T} \int_C^{C+P} f(x) \cos \frac{2n\pi x}{P} dx \quad \text{Eq. (6)}$$

$$B_n = \frac{2}{T} \int_C^{C+P} f(x) \sin \frac{2n\pi x}{P} dx$$

Taking the region from $-\frac{\pi}{2}$ to $\frac{3\pi}{2}$, $P = 2\pi$, and $C = -\frac{\pi}{2}$

$$f(x) = \frac{A_0}{2} + \sum_{n=1}^{n=\infty} (A_n \cos nx + B_n \sin nx) \quad \text{Eq. (7)}$$

In the function described by Equations (3) and (4), $f(x) = f(-x)$, and therefore their series consists of cosine terms alone.

Furthermore, $f(x) = -f(x + \pi)$ and hence its series will contain only odd harmonics.

Substituting the limits in Equation (6),

$$A_n = \frac{1}{\pi} \int_{-\frac{\pi}{2}}^{\frac{3\pi}{2}} f(x) \cos nx dx$$

By the same method used in developing Equation (4) of Appendix I, it can be shown that

$$A_n = \frac{2}{\pi} \int_{\frac{\pi}{2}}^{\frac{\pi}{2}} f(x) \cos nx dx \quad \text{Eq. (8)}$$

Referring to Equation (3), let

$$g = A^2 \cos^2 x \quad \text{Eq. (9)}$$

$$h = 2AB \cos x \cos 3x \quad \text{Eq. (10)}$$

$$i = B^2 \cos^2 3x \quad \text{Eq. (11)}$$

so that

$$F(x) = g + h + i \quad \text{Eq. (12)}$$

Let $A_n(g)$ refer to the Fourier coefficients of g .

$$A_n(g) = \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} A^2 \cos^2 x \cos nx dx \quad \text{Eq. (13)}$$

$$A_1(g) = \frac{2A^2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^3 x dx \quad \text{Eq. (14)}$$

$$= \frac{2A^2}{4\pi} \left[\frac{1}{3} \sin 3x + 3 \sin x \right]_{-\frac{\pi}{2}}^{\frac{\pi}{2}}$$

(1) $f(x,y) = \frac{1}{2} \ln(x^2 + y^2)$ is a harmonic function.

$$\Delta f = \frac{1}{2} \Delta \ln(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} \Delta(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} (2 + 2) = \frac{1}{x^2 + y^2} \neq 0$$

(2) $f(x,y) = \frac{1}{2} \ln(x^2 + y^2)$ is not a harmonic function.

Since $\Delta f \neq 0$, it is not harmonic.

(3) $f(x,y) = \frac{1}{2} \ln(x^2 + y^2)$

$$\Delta f = \frac{1}{2} \Delta \ln(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} \Delta(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} (2 + 2) = \frac{1}{x^2 + y^2} \neq 0$$

Since $\Delta f \neq 0$, it is not harmonic.

(4) $f(x,y) = \frac{1}{2} \ln(x^2 + y^2)$

$$\Delta f = \frac{1}{2} \Delta \ln(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} \Delta(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} (2 + 2) = \frac{1}{x^2 + y^2} \neq 0$$

(5) $f(x,y) = \frac{1}{2} \ln(x^2 + y^2)$

$$\Delta f = \frac{1}{2} \Delta \ln(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} \Delta(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} (2 + 2) = \frac{1}{x^2 + y^2} \neq 0$$

(6) $f(x,y) = \frac{1}{2} \ln(x^2 + y^2)$

$$\Delta f = \frac{1}{2} \Delta \ln(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} \Delta(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} (2 + 2) = \frac{1}{x^2 + y^2} \neq 0$$

Since $\Delta f \neq 0$, it is not harmonic.

(7) $f(x,y) = \frac{1}{2} \ln(x^2 + y^2)$

$$\Delta f = \frac{1}{2} \Delta \ln(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} \Delta(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} (2 + 2) = \frac{1}{x^2 + y^2} \neq 0$$

Since $\Delta f \neq 0$, it is not harmonic.

(8) $f(x,y) = \frac{1}{2} \ln(x^2 + y^2)$

$$\Delta f = \frac{1}{2} \Delta \ln(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} \Delta(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} (2 + 2) = \frac{1}{x^2 + y^2} \neq 0$$

(9) $f(x,y) = \frac{1}{2} \ln(x^2 + y^2)$

$$\Delta f = \frac{1}{2} \Delta \ln(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} \Delta(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} (2 + 2) = \frac{1}{x^2 + y^2} \neq 0$$

$$\Delta f = \frac{1}{2} \Delta \ln(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} \Delta(x^2 + y^2) = \frac{1}{2} \frac{1}{x^2 + y^2} (2 + 2) = \frac{1}{x^2 + y^2} \neq 0$$

$$A_1(g) = 2 \frac{4A^2}{3\pi} \quad \text{Eq. (15)}$$

$$A_3(g) = \frac{2A^2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^2 x \cos 3x \, dx$$

$$A_3(g) = \frac{2A^2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (4\cos^5 x - 3\cos^3 x) \, dx \quad \text{Eq. (16)}$$

By trigonometric substitution and Equations (14) and (15),

$$\begin{aligned} A_3(g) &= \frac{2A^2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 4(1 - 2\sin^2 x \sin^4 x) \cos x \, dx - \frac{8A^2}{\pi} \\ &= \frac{2A^2}{\pi} \left[4\sin x - \frac{8}{3}\sin^3 x + \frac{4}{5}\sin^5 x \right]_{-\frac{\pi}{2}}^{\frac{\pi}{2}} - \frac{8A^2}{\pi} \end{aligned}$$

$$A_3(g) = 2 \frac{4A^2}{15\pi} \quad \text{Eq. (17)}$$

$$A_5(g) = \frac{2A^2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^2 x \cos 5x \, dx$$

$$A_5(g) = \frac{2A^2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (16 \cos x - 20 \cos^5 x + 5 \cos^3 x) \, dx \quad \text{Eq. (18)}$$

By Equations (14), (15), (16) and (17),

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^5 x \, dx = \frac{16}{15} \quad \text{Eq. (19)}$$

By trigonometric substitution and Equations (14), (15) and (19),

$$A_5(g) = \frac{2A^2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 16(1-3\sin^2 x + 3\sin^4 x - \sin^6 x) \cos x dx$$

$$+ 2\left(\frac{-6^4}{3\pi} A^2 + \frac{2^0}{3\pi} A^2\right)$$

$$A_5(g) = \frac{2A^2}{\pi} \left[16 \sin x - 16 \sin^3 x + \frac{48}{5} \sin^5 x - \frac{16}{7} \sin^7 x \right]_{-\frac{\pi}{2}}^{\frac{\pi}{2}}$$

$$- \frac{88}{3\pi} A^2$$

$$A_5(g) = -2 \frac{4A^2}{105\pi} \quad \text{Eq. (20)}$$

Since this Fourier Series is obviously converging very rapidly, no terms beyond the $A_5(g)$ term will be computed.

Let $A_n(h)$ refer to the Fourier components of h .

Then, by Equations (8) and (10),

$$A_n(h) = \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 2AB \cos x \cos 3x \cos nx dx \quad \text{Eq. (21)}$$

$$A_1(h) = \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 2AB \cos^2 x \cos 3x dx \quad \text{Eq. (22)}$$

$$= \frac{4AB}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (4 \cos^5 x - 3 \cos^3 x) dx$$

By Equations (14) and (17),

$$A_1(h) = \frac{4AB}{\pi} \left(\frac{4 \times 16}{15} - \frac{3 \times 4}{3} \right)$$

$$A_1(h) = 2 \frac{8}{15\pi} \quad \text{Eq. (23)}$$

By Equation (21)

$$A_3(h) = \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 2 AB \cos x \cos^2 3x \, dx$$

$$= \frac{4AB}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos x \left(\frac{1}{2} + \frac{1}{2} \cos 6x \right) dx$$

$$A_3(h) = \frac{4AB}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \left[\frac{1}{2} \cos x + \frac{1}{2} (32 \cos^1 x - 48 \cos^5 x + 18 \cos^3 x - \cos x) \right] dx \quad \text{Eq. (24)}$$

By Equations (18), (14), (15), (19) and (20):

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos x \, dx = \frac{1}{16} \left(\frac{-4}{105} + \frac{20 \times 16}{15} - \frac{5 \times 4}{3} \right)$$

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos x \, dx = \frac{32}{35} \quad \text{Eq. (25)}$$

By Equations (14), (15), (19), (23) and (24):

$$A_3(h) = \frac{4AB}{\pi} \left[\frac{16 \times 32}{35} - \frac{24 \times 16}{15} + \frac{9 \times 4}{3} \right]$$

$$A_3(h) = 2 \frac{2AB(36)}{35\pi} \quad \text{Eq. (26)}$$

By Equation (13),

$$A_5(h) = \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 2 AB \cos x \cos 3x \cos 5x dx$$

$$A_5(h) = \frac{4AB}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (64 \cos^9 x - 128 \cos^7 x + 80 \cos^5 x - 15 \cos^3 x) dx \quad \text{Eq. (27)}$$

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^9 x dx = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (1 - 4 \sin^2 x + 6 \sin^4 x - 4 \sin^6 x + \sin^8 x) \cos x dx$$

$$= \left[\sin x - \frac{4}{3} \sin^3 x + \frac{6}{5} \sin^5 x - \frac{4}{7} \sin^7 x + \frac{1}{9} \sin^9 x \right]_{-\frac{\pi}{2}}^{\frac{\pi}{2}}$$

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^9 x dx = \frac{256}{315} \quad \text{Eq. (28)}$$

By Equations (14), (15), (19), (25), (27) and (28):

$$A_5(h) = 2 \frac{2AB}{\pi} \left(\frac{64 \times 256}{315} - \frac{128 \times 32}{35} + \frac{80 \times 16}{15} - \frac{15 \times 4}{3} \right)$$

$$A_5(h) = 2 \frac{2AB}{\pi} \left(\frac{20}{63} \right) \quad \text{Eq. (29)}$$

By Equations (8) and (11)

$$A_n(i) = 2/\pi \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} B^2 \cos^2 3x \cos nx dx$$

()

$$\text{[Blank space]} \quad \int_{-\infty}^{\infty} \frac{1}{x^2+1} dx$$

$$(1) \quad \text{[Blank space]} \quad \int_{-\infty}^{\infty} \frac{1}{x^2+1} dx$$

$$\text{[Blank space]} \quad \int_{-\infty}^{\infty} \frac{1}{x^2+1} dx$$

$$\text{[Blank space]} \quad \int_{-\infty}^{\infty} \frac{1}{x^2+1} dx$$

$$(2) \quad \text{[Blank space]} \quad \int_{-\infty}^{\infty} \frac{1}{x^2+1} dx$$

() () () () () () () () () ()

$$\left(\frac{1}{x^2+1} \right) = \frac{1}{x^2+1} = \frac{1}{x^2+1} = \frac{1}{x^2+1} = \frac{1}{x^2+1} = \frac{1}{x^2+1} = \frac{1}{x^2+1} = \frac{1}{x^2+1} = \frac{1}{x^2+1} = \frac{1}{x^2+1}$$

$$(3) \quad \text{[Blank space]} \quad \int_{-\infty}^{\infty} \frac{1}{x^2+1} dx$$

() () () () () () () () () ()

$$\text{[Blank space]} \quad \int_{-\infty}^{\infty} \frac{1}{x^2+1} dx$$

$$\begin{aligned}
A_1(i) &= B^2/\pi \int_{-\pi/2}^{\pi/2} (x + \cos 6x) \cos x \, dx \\
&= B^2/\pi \left[\int_{-\pi/2}^{\pi/2} \cos x \, dx + \frac{1}{2} \int_{-\pi/2}^{\pi/2} \cos 5x \, dx + \frac{1}{2} \right. \\
&\quad \left. \int_{-\pi/2}^{\pi/2} \cos 7x \, dx \right] = 2 B^2/\pi (1 + 1/10 - 1/14) \\
&= 2 B^2/\pi (36/35)
\end{aligned}$$

Similarly

$$\begin{aligned}
A_3(i) &= 2B^2/\pi (-1/3 - 1/6 + 1/18) \\
&= -2 B^2/\pi (4/9)
\end{aligned}$$

$$A_5(i) = 2 B^2/\pi (1/5 + \frac{1}{2} - 1/22)$$

$$A_5(i) = 2 B^2/\pi (36/55) \quad \text{Eq. (29)}$$

Although this series does not seem to be converging, computations indicate that $A_7(i)$ equals approximately $2B^2/\pi (5/14)$ and $A_9(i)$ equals $2B^2/\pi (-4/45)$ and thereafter the series converges very rapidly. The $A_7(i)$ and $A_9(i)$ terms will not be used, however, as the 7th and 9th order terms for g and h were determined. Furthermore, in the usual case, B will be of small magnitude which when squared and multiplied by the coefficients $2/\pi(5/14)$ and $2/\pi (4/45)$ respectively, makes these terms insignificantly

small. For the case of a sinusoidal input, Appendix I shows B equals to (-0.160).

By Equations (3), (5) and (13),

$$\begin{aligned}
 F(x) &= \sum_{n=1}^{\infty} [A_n(g) \cos nx + A_n(h) \cos nx + A_n(i) \cos nx] \\
 &= 2 \left[\frac{4A^2 \cos x}{3\pi} + \frac{4A^2 \cos 3x}{15\pi} - \frac{4A^2 \cos 5x}{105\pi} + \frac{8AB \cos x}{15\pi} \right. \\
 &\quad - \frac{2AB(36) \cos 3x}{35\pi} - \frac{2AB(20) \cos 5x}{63\pi} - \frac{B^2(36) \cos x}{35\pi} \\
 &\quad \left. - \frac{B^2(4) \cos 3x}{9\pi} - \frac{B^2(36) \cos 5x}{55\pi} \right] \quad \text{Eq. (30)}
 \end{aligned}$$

$$\begin{aligned}
 F(x) &= 2(4A^2/3\pi + 8AB/15\pi + 36B^2/35\pi) \cos x \\
 &\quad + 2(4A^2/15\pi + 2AB(36)/35\pi - 4B^2/9\pi) \cos 3x \\
 &\quad + 2(-4A^2/105\pi + 2AB(20)/63\pi - 36B^2/35\pi) \cos 5x \\
 &\quad \text{Eq. (31)}
 \end{aligned}$$

This completes the Fourier Series up through terms of the fifth order for the waveform indicated by the dashed line in Figure 18.

If we substitute the values for A and B as determined in Appendix I for the compressed cosine wave, then $A = A_1 = 1.12$ and $B = B_1 = 0.160$. Let $F_c(x)$ refer to the case of a cosinusoidal wave at the input of this system, and equation (31) becomes

It is assumed that the system is in a steady state, and the input is a unit step function.

The output is given by

$$y(t) = 1 - e^{-t} \quad (1)$$

$$y(t) = 1 - e^{-t} \quad (1) \quad \text{and} \quad y(t) = 1 - e^{-t} \quad (2) \quad \text{for} \quad t \geq 0$$

$$y(t) = 1 - e^{-t} \quad (1) \quad \text{and} \quad y(t) = 1 - e^{-t} \quad (2) \quad \text{for} \quad t \geq 0$$

$$y(t) = 1 - e^{-t} \quad (1) \quad \text{and} \quad y(t) = 1 - e^{-t} \quad (2) \quad \text{for} \quad t \geq 0$$

$$y(t) = 1 - e^{-t} \quad (1) \quad \text{and} \quad y(t) = 1 - e^{-t} \quad (2) \quad \text{for} \quad t \geq 0$$

(1) $y(t) = 1 - e^{-t}$

$$y(t) = 1 - e^{-t} \quad (1) \quad \text{and} \quad y(t) = 1 - e^{-t} \quad (2) \quad \text{for} \quad t \geq 0$$

$$y(t) = 1 - e^{-t} \quad (1) \quad \text{and} \quad y(t) = 1 - e^{-t} \quad (2) \quad \text{for} \quad t \geq 0$$

$$y(t) = 1 - e^{-t} \quad (1) \quad \text{and} \quad y(t) = 1 - e^{-t} \quad (2) \quad \text{for} \quad t \geq 0$$

(1) $y(t) = 1 - e^{-t}$

It is assumed that the system is in a steady state, and the input is a unit step function.

The output is given by

The output is given by

The output is given by

The output is given by

The output is given by

$$\begin{aligned}
F_c(x) = & 2 \left[\frac{4 (1.12)^2}{2\pi} - \frac{8 (1.12)(0.160)}{15\pi} + \frac{36(0.160)^2}{35\pi} \right] \cos x \\
& 2 \left[\frac{4 (1.12)^2}{15\pi} - \frac{2 (1.12)(0.160)(36)}{35} - \frac{4(0.160)^2}{9} \right] \cos 3x \\
& 2 \left[\frac{-2 (1.12)(0.160)(20)}{63 \pi} - \frac{4 (1.12)^2}{105 \pi} + \frac{36 (0.160)^2}{55 \pi} \right] \cos 5x
\end{aligned}$$

Eq. (32)

We have here now a Fourier Series up through terms of the fifth order for the wave at the output of the receiving end amplifier with a sine wave input to the transmitting end amplifier. If Equation (32) included all significant harmonics, it should therefore be a sinusoidal wave, or it should simply equal $\cos x$. In order for this to be true, the coefficient of $\cos x$ in Equation 32 must converge to unity and the coefficients of all other terms must converge to zero. It is interesting to note how nearly true this is in Equation (32). It should be noted that since Equation (3) and (4) did not include any harmonics above the third harmonic, Equation (32) is representative of the case where an idealized filter having no phase shift and a cut-off frequency just above the third harmonic is inserted between the sending end amplifier and the receiving end amplifier.

Computing the coefficients of Equation (32) we obtain:

$$F_c(x) = 1.021 \cos x - 0.028 \cos 3x - 0.0922 \cos 5x. \quad \text{Eq. (33)}$$

This shows a surprisingly close reproduction of the $\cos x$ wave. Note, that whereas the third harmonic distortion is only about 2.8% the fifth harmonic distortion is about 9%. Experimental evidence seems to indicate that this relatively large fifth harmonic is indicative of how the system generally operates and hence an explanation of it is in order.

If the system operates perfectly so that it does not introduce any distortion of the input wave other than that caused by the functions it is intended to perform, then all distortion introduced by the sending end amplifier is removed by the receiving end amplifier. From Appendix I, it is apparent that if we have a sinusoidal input wave to this "perfect" system, there will exist at the input to the receiving end amplifier, a waveform that may be described by

$$f(x) = A_1 \cos x + A_3 \cos 3x + A_5 \cos 5x + \dots + A_n \cos nx + \dots$$

where the limits of Equations 3 and 4 apply.

At the output of such a system, there will be a waveform of the type

$$F_c(x) = + \sum_{n=1}^{\infty} \sum_{m=1}^{\infty} A_n A_m \cos nx \cos mx, \quad \begin{matrix} n = 1, 3, 5, \dots \\ m = 1, 3, 5, \dots \end{matrix} \quad -\frac{\pi}{2} < x < \frac{\pi}{2}$$

$$F_c(x) = - \sum_{n=1}^{\infty} \sum_{m=1}^{\infty} A_n A_m \cos nx \cos mx, \quad \begin{matrix} n = 1, 3, 5, \dots, m = 1, 3, 5, \dots \end{matrix} \quad \frac{\pi}{2} < x < \frac{3\pi}{2}$$

Each term of the equations for $F_c(x)$ can be described by a Fourier Series. Letting $F_{c_{nm}}(x)$ refer to a particular term of the equations for $F_c(x)$, we may say

$$F_{c_{nm}}(x) = A_n A_m (a_1 \cos x + a_3 \cos 3x + a_5 \cos 5x + \dots + a_p \cos px + \dots)$$

Referring to any specific harmonic as the k th harmonic, we see that for every pair of values of m and n there is a finite mathematical contribution to the k th harmonic having a magnitude

$A_n A_m a_k$. However, since in the "perfect" system, the k th harmonic will not exist in the output, the sum of all such terms must be equal to zero, that is

$$\sum_{n=1}^{\infty} \sum_{m=1}^{\infty} A_n A_m a_k = 0.$$

If we refer to the highest harmonic that the system is capable of passing as the L th harmonic, then neither m nor n can exceed L . By comparison with the Fourier coefficients that have been computed, it is apparent that most of the significant coefficients contributing to the k th harmonic arise from those terms for which either n or m or both are less than or equal to k . Therefore, if L is greater than k , then most of the k th order terms having significant coefficients will appear "mathematically" in the output, and we can expect that their sum will be near zero. That is, there will be almost perfect cancellation of the k th order harmonic. If, however, L is somewhat less than k a smaller portion of the k th order terms having significant coefficients will appear in the output, and the cancellation will not be as perfect, and the magnitude of the k th order harmonic may exceed the magnitudes of preceding lower order harmonics. For harmonics of higher order than k , however, the magnitude of the harmonics appearing in the output decreases very rapidly despite the imperfect cancellation because the coefficients $A_n A_m a_p$ become very small.

Consequently, with a sinusoidal input wave, an idealized low

Let f be a function defined on the interval $[a, b]$. Then the definite integral of f over $[a, b]$ is defined as follows:

Let P be a partition of $[a, b]$.

$$P = \{x_0, x_1, \dots, x_n\}$$

where $a = x_0 < x_1 < \dots < x_n = b$. The subintervals of $[a, b]$ determined by P are $[x_{i-1}, x_i]$ for $i = 1, 2, \dots, n$. Let ξ_i be a point in the subinterval $[x_{i-1}, x_i]$. The Riemann sum of f over $[a, b]$ with respect to P and ξ_i is defined as follows:

$$R(P, \xi) = \sum_{i=1}^n f(\xi_i) (x_i - x_{i-1})$$

The definite integral of f over $[a, b]$ is defined as the limit of the Riemann sum as the norm of the partition P approaches zero. The norm of the partition P is the maximum length of the subintervals of P . The definite integral of f over $[a, b]$ is denoted by $\int_a^b f(x) dx$.

Let f be a function defined on the interval $[a, b]$. Then the definite integral of f over $[a, b]$ is defined as follows:

pass filter having no phase shift and a cut-off frequency just below the k th order harmonic can be expected to cause the harmonic content of the output wave to be mainly above the k th order harmonic. Therefore, a similar filter in the output of the system will eliminate most of the distortion caused by the first filter.

If this were a linear system, we could then apply the laws of superposition and expect a similar result from a complex wave such as a speech wave. We could then assume that if we restricted the transmitted wave bandwidth by inserting such an ideal low pass filter having a cut-off frequency of three kilocycles, the main harmonics appearing in the output wave would be above three kilocycles. We could then eliminate these unwanted harmonics by simply passing the output wave through another low pass filter having a three kilocycle cut-off frequency.

Since the transmitting end amplifier and the receiving end amplifier are both non-linear in nature, a complex wave entering either amplifier will result in cross modulation components, consisting of sum and difference frequencies. If there is no other distortion within the system, however, these cross modulation components must all be in such phase and amplitude at the output as to be cancelled. If a filter is inserted after the transmitting end amplifier, some of the cross modulation frequencies will not pass through the system, and consequently there will be imperfect cancellation of these frequencies in the output of the system. In general there will be cross modulation components generated by

the transmitting end amplifier that will lie within the pass band of any band width limiting filter. It can be expected that these components will give rise to imperfectly cancelled components of the same frequency in the output. Therefore, these frequencies will not be eliminated by a similar filter in the output circuit and distortion will result. Nevertheless, experimental results reported in Chapter IV seem to indicate that the system operates very similar to a linear system in this respect and consequently a similar filter in the output circuit does improve the quality of reproduction with limited bandwidth. That is, the system seems to operate very nearly as if the laws of superposition did apply. Since it is impossible at this state of the art to build a filter that does not have a phase shift, a rigorous experimental verification of this is hard to obtain.

So far, we have considered using only an ideal filter. Now let us assume that we have a filter, or imperfect audio system, that introduces no phase distortion but does reduce the amplitude of the third harmonic in equation 1 by 10%, and reduces all higher order harmonics to zero. Hence,

$$f(x) = A \cos x + 0.9 B \cos 3x \quad \text{Eq. (34)}$$

The equations corresponding to Equations 3 and 4 become

$$\begin{aligned} \frac{f(x)}{f(x)}^2 &= (A^2 \cos^2 x + 1.8 AB \cos x \cos 3x + 0.81 B^2 \cos^2 3x) \\ &\quad - \frac{\pi}{2} < x < \frac{\pi}{2} \quad \text{Eq. (35)} \end{aligned}$$

The first part of the report is devoted to a general survey of the situation in the country. It is found that the country is in a state of general depression, and that the people are suffering from want and distress. The second part of the report is devoted to a detailed account of the various causes of the depression, and the third part to a description of the measures which have been taken to relieve the suffering.

The first cause of the depression is the failure of the harvest. This was due to a combination of factors, including drought, pestilence, and war. The second cause is the high price of foodstuffs, which has made it impossible for the people to buy enough to eat. The third cause is the high price of clothing, which has made it impossible for the people to buy enough to wear.

The measures which have been taken to relieve the suffering are of two kinds. The first kind is the distribution of foodstuffs, and the second kind is the distribution of clothing. The foodstuffs are distributed in the form of soup, and the clothing is distributed in the form of clothes.

The results of these measures are very good. The people are now able to buy enough food to eat, and enough clothing to wear. They are no longer suffering from want and distress.

The report concludes with a statement of the author's opinion. He believes that the country is now in a state of general prosperity, and that the people are happy and content.

$$\begin{aligned}
 (1) \quad & \frac{1}{2} \left(\frac{1}{2} + \frac{1}{2} \right) = \frac{1}{2} \\
 (2) \quad & \frac{1}{2} \left(\frac{1}{2} + \frac{1}{2} \right) = \frac{1}{2}
 \end{aligned}$$

$$\overline{f(x)}^2 = -(A^2 \cos^2 x + 1.8 AB \cos x \cos 3x + 0.81 B^2 \cos^2 3x) \quad \frac{\pi}{2} < x < \frac{3}{2} \pi \quad \text{Eq. (36)}$$

To obtain equations equivalent to Equations (9), (10) and (11), let

$$g' = A^2 \cos^2 x \quad \text{Eq. (37)}$$

$$h' = 1.8 AB \cos x \cos 3x \quad \text{Eq. (38)}$$

$$i' = 0.81 B^2 \cos^2 3x \quad \text{Eq. (39)}$$

Letting $A_n(g')$, $A_n(h')$ and $A_n(i')$ refer to the respective Fourier coefficients of g' , h' and i' , it is apparent that

$$A_n(g') = A_n(g) \quad \text{Eq. (40)}$$

$$A_n(h') = 0.9 A_n(h) \quad \text{Eq. (41)}$$

$$A_n(i') = 0.81 A_n(i) \quad \text{Eq. (42)}$$

Let $F_c(x')$ refer to the case of a cosinusoidal wave at the input of this system when this non-ideal filter is inserted in the system between the transmitting end amplifier and receiving end amplifier. Then by Equations 31, 40, 41 and 42, an equation equivalent to Equation (32) is

$$\begin{aligned} F_c(x') = & 2 \left[\frac{4(1.12)^2}{3\pi} - \frac{8(0.9)(1.12)(0.160)}{15\pi} + \frac{(0.81)(36)(0.160)^2}{35\pi} \right] \cos x \\ & + 2 \left[\frac{4(1.12)^2}{15\pi} - \frac{2(0.9)(1.12)(0.160)(36)}{35\pi} - \frac{4(0.81)(0.160)^2}{9\pi} \right] \cos 3x \\ & 2 \left[-\frac{2(0.9)(1.12)(0.160)(20)}{63\pi} - \frac{4(1.12)^2}{105\pi} + \frac{(0.81)(36)(0.160)^2}{55\pi} \right] \cos 5x \end{aligned} \quad \text{Eq. (43)}$$

The equation corresponding to Equation (33) is

$$F_c(x') = 1.025 \cos x - 0.0031 \cos 3x - 0.0868 \cos 5x \quad \text{Eq. (44)}$$

We see that the third harmonic now has an amplitude equal to 0.3% of the fundamental component compared to 2.8% of the fundamental component in Equation (33). The fifth harmonic now has an amplitude equal to 8.32% of the fundamental component compared to 9.0% of the fundamental component in Equation (33). Hence, we see that there has been a slight reduction in the harmonic components. If as Chapter IV seems to indicate, these results are also applicable to the case of speech input, we can conclude that a small amount of amplitude distortion between the compressing amplifier and the expanding amplifier does not appreciably alter the quality of the output of the system.

Now let us consider the case where we have a filter or imperfect audio system that introduces phase distortion along with a small amount of amplitude distortion. This, of course, is the usual case that would be encountered in practice. The amount of phase distortion that would accompany the 10% reduction in the third harmonic component as given in Equation (44) might well be in the order of 30° . Hence, in this case,

$$\begin{aligned} f(x) &= A \cos x + 0.9 B \cos(3x + 30^\circ) \\ &= A \cos x + 0.9 B (\cos 3x \cos 30^\circ - \sin 3x \sin 30^\circ) \\ &= A \cos x + 0.787 B \cos 3x - 0.45 B \sin 3x \end{aligned}$$

$$f(x) = A \cos x + B (0.787 \cos 3x - 0.45 \sin 3x) \quad \text{Eq. (45)}$$

The following are the results of the analysis (11) is

$$(11) \quad \text{The following are the results of the analysis (11) is}$$

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

The following are the results of the analysis (11) is

$$(12) \quad \text{The following are the results of the analysis (11) is}$$

$$(13) \quad \text{The following are the results of the analysis (11) is}$$

$$(14) \quad \text{The following are the results of the analysis (11) is}$$

$$(15) \quad \text{The following are the results of the analysis (11) is}$$

The equations corresponding to Equations (11) and (12) now become

$$\begin{aligned} \frac{f(x)}{2} = & (A \cos x)^2 + 2 AB \cos x (0.787 \cos 3x - 0.45 \sin 3x) \\ & + B^2 (0.787 \cos 3x - 0.45 \sin 3x)^2 \end{aligned} \quad \text{Eq. (46)}$$

$$\begin{aligned} \frac{f(x)}{2} = & - (A \cos x)^2 - 2 AB \cos x (0.787 \cos 3x - 0.45 \sin 3x) \\ & - B^2 (0.787 \cos 3x - 0.45 \sin 3x)^2 \end{aligned} \quad \text{Eq. (47)}$$

To obtain equations equivalent to Equations (9), (10), and (11), let

$$g'' = A^2 \cos^2 x \quad \text{Eq. (48)}$$

$$h'' = 2 AB \cos x (0.787 \cos 3x - 0.45 \sin 3x) \quad \text{Eq. (49)}$$

$$i'' = B^2 (0.787 \cos 3x - 0.45 \sin 3x)^2$$

Letting $A_n(g'')$, $A_n(h'')$ and $A_n(i'')$ refer to the respective Fourier coefficients of g'' , h'' , and i'' , it is apparent that

$$A_n(g'') = A_n(g) \quad \text{Eq. (51)}$$

From Equations (10), (13) and (50),

$$A_n(h'') = 0.787 A_n(h) - \sum_{n=1}^{\infty} \frac{1}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 0.9 AB \cos x \cos nx \cos 3x dx$$

Let

$$a_n(h'') = \sum_{n=1}^{\infty} \frac{1}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 0.9 AB \cos x \cos nx \sin 3x dx$$

$$\begin{aligned}
a_1(h'') &= \frac{1}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 0.9 AB \cos^2 x \sin 3x \, dx \\
&= \frac{0.9AB}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (3 \cos^2 x \sin x - 4 \cos^2 x \sin^3 x) \, dx \\
&= \frac{0.9 AB}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (3 \cos^2 x \sin x - 4 \cos^2 x \sin x \\
&\quad + 4 \cos^4 x \sin x) \, dx \\
&= 0
\end{aligned}$$

Since all terms in the integral for $a_n(h)$ will reduce to the form,

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^n x \sin x \, dx, \quad a_n(h) = 0$$

Hence

$$A_n(h'') = 0.787 A_n(h) \quad \text{Eq. (52)}$$

From Equation (50) ,

$$\begin{aligned}
i'' &= B^2 (0.611 \cos^2 3x - 0.707 \cos 3x \sin 3x + 0.202 \sin^2 3x) \\
&= (0.611 \cos^2 3x + 0.202 - 0.202 \cos^2 3x - 0.707 \cos 3x \sin 3x)
\end{aligned}$$

$$i'' = B^2 (0.202 + 0.409 \cos^2 3x - \frac{0.699}{2} \sin 6x) \quad \text{Eq. (53)}$$

Let

$$a(i'') = 0.202 B^2 \quad \text{Eq. (54)}$$

$$b(i'') = B^2 0.409 \cos^2 3x \quad \text{Eq. (55)}$$

$$c(i'') = B^2 0.349 \sin 6x \quad \text{Eq. (56)}$$

$$\text{rank}(A) = \text{rank}(A^T) = \text{rank}(A^T A) = \text{rank}(A A^T) = \text{rank}(A^T A A^T) = \text{rank}(A^T A A^T A) = \dots$$

$$\text{rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T) = \text{rank}(A^T A A^T) = \text{rank}(A^T A A^T A) = \dots$$

$$\text{rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T) = \text{rank}(A^T A A^T) = \text{rank}(A^T A A^T A) = \dots$$

Let A be an $m \times n$ matrix. Then $\text{rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T)$.

$$\text{rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T)$$

$$(1) \text{ rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T)$$

$$(2) \text{ rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T)$$

$$\text{rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T) = \text{rank}(A^T A A^T) = \text{rank}(A^T A A^T A) = \dots$$

$$(3) \text{ rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T) = \text{rank}(A^T A A^T) = \text{rank}(A^T A A^T A) = \dots$$

$$(4) \text{ rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T) = \text{rank}(A^T A A^T) = \text{rank}(A^T A A^T A) = \dots$$

$$(5) \text{ rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T) = \text{rank}(A^T A A^T) = \text{rank}(A^T A A^T A) = \dots$$

$$(6) \text{ rank}(A) = \text{rank}(A^T A) = \text{rank}(A A^T) = \text{rank}(A^T A A^T) = \text{rank}(A^T A A^T A) = \dots$$

Remembering that Equations (54), (55) and (56) are restricted by the conditions of Equations (46) and (47), let $a_n(i'')$, $b_n(i'')$ and $c_n(i'')$ refer to the respective Fourier coefficients of $a(i'')$, $b(i'')$ and $c(i'')$ respectively. Then,

$$A_n(i'') = a_n(i'') + b_n(i'') + c_n(i'') \quad \text{Eq. (57)}$$

Due to the conditions imposed upon Equation (54), $a(i'')$ is actually a square wave having a period of 2 and an amplitude of $0.202B^2$. From the Fourier analysis of a square wave,

$$a(i'') = (0.257 \cos x - 0.857 \cos 3x + 0.0515 \cos 5x)B^2$$

Comparing Equations (55) and (11),

$$b_n(i'') = 0.409 A_n(i)$$

Since all terms in the integral for $c_n(i'')$ will reduce to the form

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^n x \sin x \, dx, \quad c_n(i'') = 0$$

Employing Equation (54),

$$\begin{aligned} i'' = & (0.257 \cos x - 0.0857 \cos 3x + 0.515 \cos 5x + \frac{(0.409)(36)}{(2)(35)} \cos x \\ & - \frac{(0.409)(4)}{(2)(9)} \cos x + \frac{(0.409)(36)}{(2)(55)} \cos 5x) B^2 \end{aligned}$$

Let $F_c(x'')$ refer to the case of a cosinusoidal wave at the input of this system when we have a filter or imperfect audio system that introduces a 10% reduction in the third harmonic component and a shift of 30° in phase of the third harmonic. The equation corresponding to Equation (31) becomes

The first part of the proof is devoted to the construction of a function f which is continuous on $[0, 1]$ and satisfies the conditions (1) and (2). For this purpose we consider the function g defined on $[0, 1]$ by the formula

$$(2) \quad g(x) = \begin{cases} x^2 \sin \frac{1}{x} & \text{if } x \neq 0 \\ 0 & \text{if } x = 0 \end{cases}$$

It is easy to see that g is continuous on $[0, 1]$ and satisfies the conditions (1) and (2). Moreover, g is differentiable on $(0, 1]$ and its derivative is given by the formula

$$g'(x) = 2x \sin \frac{1}{x} - \cos \frac{1}{x} \quad \text{for } x \in (0, 1].$$

Now we define the function f on $[0, 1]$ by the formula

$$f(x) = \begin{cases} g(x) & \text{if } x \in [0, 1] \\ 0 & \text{if } x \in \mathbb{R} \setminus [0, 1] \end{cases}$$

It is easy to see that f is continuous on \mathbb{R} and satisfies the conditions (1) and (2).

$$f(x) = \begin{cases} x^2 \sin \frac{1}{x} & \text{if } x \neq 0 \\ 0 & \text{if } x = 0 \end{cases}$$

(3)

$$f(x) = \begin{cases} x^2 \sin \frac{1}{x} & \text{if } x \neq 0 \\ 0 & \text{if } x = 0 \end{cases}$$

$$f(x) = \begin{cases} x^2 \sin \frac{1}{x} & \text{if } x \neq 0 \\ 0 & \text{if } x = 0 \end{cases}$$

The function f is continuous on \mathbb{R} and satisfies the conditions (1) and (2). Moreover, f is differentiable on $(0, 1]$ and its derivative is given by the formula

$$f'(x) = 2x \sin \frac{1}{x} - \cos \frac{1}{x} \quad \text{for } x \in (0, 1].$$

Now we define the function f on \mathbb{R} by the formula

$$\begin{aligned}
F_c(x'') = & 2 \left[\frac{4A^2}{3\pi} + \frac{(0.787)(8AB)}{15\pi} + \frac{0.257 B^2}{2} + \frac{(0.409)(36)B^2}{35\pi} \right] \cos x \\
& + 2 \left[\frac{4A^2}{15\pi} + \frac{(0.787)(2AB)(36)}{35\pi} - \frac{0.0857 B^2}{2} - \frac{(0.409)(4) B^2}{9\pi} \right] \cos 3x \\
& + 2 \left[\frac{0.0515 B^2}{2} - \frac{4A^2}{105\pi} + \frac{(0.787)(2AB)(20)}{63\pi} + \frac{(0.409)(36)B^2}{55\pi} \right] \cos 5x
\end{aligned}$$

Substituting for A and B from Appendix I,

$$\begin{aligned}
F_c(x'') = & 2 \left[\frac{4(1.12)^2}{3} - \frac{(0.787)(8)(1.12)(0.160)}{15} + \frac{(0.257)(0.160)^2}{2} \right. \\
& \left. + \frac{(0.409)(36)(0.160)^2}{35} \right] \cos x \\
& 2 \left[\frac{4(1.12)^2}{15} + \frac{(0.787)(2)(1.12)(0.160)(36)}{35} - \frac{(0.087)(0.160)^2}{2} \right. \\
& \left. - \frac{(0.160)^2(0.409)(4)}{9} \right] \cos 3x \\
& 2 \left[-\frac{4(1.12)^2}{105} - \frac{(0.787)(2)(1.12)(0.160)(20)}{63} + \frac{(0.0515)(0.160)^2}{2} \right. \\
& \left. + \frac{(0.409)(36)(0.160)^2}{55} \right] \cos 5x
\end{aligned}$$

The equation corresponding to Equation (33) is

$$F_c(x'') = 1.027 \cos x + 0.025 \cos 3x + 0.0906 \cos 5x$$

The third harmonic now has an amplitude equal to 2.5% of the fundamental compared to 2.8% of the fundamental component in Equation (33). The fifth harmonic now has an amplitude equal to 8.8% of the fundamental component compared to 9.0% of the fundamental component in Equation (33). So far, the case of a small amount of both amplitude and phase distortion has not seriously altered the output wave. Again, because of the non-linearities within the system, one cannot conclude that these results are necessarily applicable to

$$(u_1, \dots, u_n) \in (U_1, \dots, U_n) \Rightarrow (u_1, \dots, u_n) \in (U_1, \dots, U_n) \Rightarrow (u_1, \dots, u_n) \in (U_1, \dots, U_n) \Rightarrow (u_1, \dots, u_n) \in (U_1, \dots, U_n)$$

$$x \in \mathbb{R}^n \rightarrow \tilde{x} = (x_1, \dots, x_n)$$

$$x \in \mathbb{R}^n \mid \begin{pmatrix} x \\ 1 \end{pmatrix} \in (V_1 - \mathbb{R} \cdot \mathbf{1}) \cap (V_2 - \mathbb{R} \cdot \mathbf{1})$$

[illegible]

$$= \frac{(100)(100)(100)}{1000000} = 0.01$$

the case of speech input. However, the experimental results reported in Chapter IV indicates that the operation of the system with speech input is very similar to the case of a sinusoidal wave input. The small amount of phase and amplitude distortion inherent in the systems reported in Chapter IV did not appreciably affect the quality of the output wave.

No attempt has been made to evaluate the system when there is phase distortion introduced due to differences in path length resulting from multiple ionospheric reflections or interference between ground waves and sky waves. This distortion can be severe. In a practical system it would seem well to consider this and provide a convenient means for eliminating the amplifier performing the inverse function from the system ⁷.

CHAPTER IV

EXPERIMENTAL RESULTS

In carrying out the experimental work, speech, including certain words particularly selected for the phonemes they contain, was passed through a three kilocycle low pass filter and then recorded on a magnetic tape. This tape was then used as the source of input to the system for all of the tests that followed. This tape also provided a standard of comparison.

The first aim of the experimental work was to demonstrate that such a system could be built. However, this phase already has been reported in Chapter II.

The second aim of the experimental work was to determine the desirability of using a complete system when working with restricted bandwidth rather than one employing only a "power law" compressing amplifier. There is a need to determine this since an amplifier that compresses the speech wave in the manner of the transmitting end amplifier will result in understandable speech without expanding the wave in the receiving end amplifier. Thus there would be no need for the transmitting end amplifier if it did not provide additional advantages.

Tape recordings were made from the output of the entire system and also from the output of the transmitting end amplifier eliminating the receiving end amplifier. The difference in quality of the two outputs indicates a definite improvement when the transmitting end amplifier is employed.

THE
HISTORY OF THE

In the early part of the century, the country was a vast, unexplored wilderness. The first settlers, who came from the east, found a land of great beauty and fertility. They were attracted by the mild climate and the abundance of game. The first settlement was founded in 1607, and from that time the country has been the scene of a steady and increasing population.

The first of the great cities of the country was founded in 1630. It was called New Amsterdam, and was the seat of the Dutch government. It was a city of great beauty and fertility, and it was the center of a great trade.

The second of the great cities of the country was founded in 1664. It was called New York, and was the seat of the English government. It was a city of great beauty and fertility, and it was the center of a great trade. The third of the great cities of the country was founded in 1789. It was called Philadelphia, and was the seat of the Continental Congress. It was a city of great beauty and fertility, and it was the center of a great trade. The fourth of the great cities of the country was founded in 1790. It was called Washington, and was the seat of the Federal Government. It was a city of great beauty and fertility, and it was the center of a great trade.

The fifth of the great cities of the country was founded in 1800. It was called New Orleans, and was the seat of the Spanish government. It was a city of great beauty and fertility, and it was the center of a great trade. The sixth of the great cities of the country was founded in 1820. It was called San Francisco, and was the seat of the Mexican government. It was a city of great beauty and fertility, and it was the center of a great trade.

The same process was repeated using a three kilocycle low pass filter at the output of the transmitting end amplifier. This, of course, corresponds to the case where the transmitting bandwidth is to be limited. Use of this filter prevents perfect reproduction primarily due to the phase distortion effects it introduces. Nevertheless, the transmitting end amplifier still gave a very noticeable improvement in the quality of the output. No articulation tests were run to determine the improvement in articulation, but undoubtedly some improvement does result.

In taking the above recordings, it became apparent that the receiving end amplifier can at times give a rather remarkable improvement in signal to noise ratio. The tape recording of the compressed speech wave from the transmitting end amplifier had an annoying amount of noise present on it because of background noises in the shop at the time of recording. In a practical system, the noise present in the compressed speech wave would not arise at the point of transmission but would be in the form of atmospheric noise or interfering signals. When the compressed speech wave was again expanded, the noise dropped to a level where it was barely audible. Obviously, the effect of the receiving end amplifier would be the same regardless of the origin of the noise.

Since the output voltage of the receiving end amplifier is proportional to the square of the input signal, it is apparent that there will be an improvement in signal to noise ratio whenever the signal to noise ratio is greater than one. For instance, if the signal to noise ratio is two to one at the input of the receiving end amplifier,

The first part of the report deals with the general situation in the country. It is a very interesting and well-written account of the country and its people. The second part of the report deals with the economic situation. It is a very interesting and well-written account of the economic situation and its causes. The third part of the report deals with the social situation. It is a very interesting and well-written account of the social situation and its causes. The fourth part of the report deals with the political situation. It is a very interesting and well-written account of the political situation and its causes. The fifth part of the report deals with the cultural situation. It is a very interesting and well-written account of the cultural situation and its causes. The sixth part of the report deals with the environmental situation. It is a very interesting and well-written account of the environmental situation and its causes. The seventh part of the report deals with the international situation. It is a very interesting and well-written account of the international situation and its causes. The eighth part of the report deals with the future of the country. It is a very interesting and well-written account of the future of the country and its people.

In the first part of the report, the author describes the general situation in the country. He talks about the population, the economy, the social structure, and the political system. He also talks about the culture and the environment. In the second part of the report, the author describes the economic situation. He talks about the main industries, the sources of income, and the distribution of wealth. He also talks about the problems of the economy and the ways to solve them. In the third part of the report, the author describes the social situation. He talks about the different social classes, the education system, and the health care system. He also talks about the problems of the society and the ways to solve them. In the fourth part of the report, the author describes the political situation. He talks about the different political parties, the government, and the legal system. He also talks about the problems of the political system and the ways to solve them. In the fifth part of the report, the author describes the cultural situation. He talks about the different cultural groups, the arts, and the media. He also talks about the problems of the cultural system and the ways to solve them. In the sixth part of the report, the author describes the environmental situation. He talks about the different environmental problems, the causes of these problems, and the ways to solve them. In the seventh part of the report, the author describes the international situation. He talks about the different international organizations, the relations with other countries, and the role of the country in the world. He also talks about the problems of the international system and the ways to solve them. In the eighth part of the report, the author describes the future of the country. He talks about the different scenarios for the future, the challenges that the country will face, and the ways to overcome these challenges.

The report is a very interesting and well-written account of the country and its people. It is a very good source of information for anyone who is interested in the country. The report is also a very good source of information for anyone who is interested in the world. The report is a very good source of information for anyone who is interested in the future of the country. The report is a very good source of information for anyone who is interested in the future of the world. The report is a very good source of information for anyone who is interested in the future of the human race. The report is a very good source of information for anyone who is interested in the future of the universe. The report is a very good source of information for anyone who is interested in the future of everything.

the signal to noise ratio at the output would be four to one.

In order that there would be some graphical proof of the operation of the system, spectrograms were made by use of a Kay Electric Sona-graph⁸. Photographs of these spectrograms are shown in Figures 19 through 31. In these spectrograms, the speech wave is presented as a three dimensional plot. Frequency is plotted vertically. Time is plotted horizontally, and intensity appears as darkness of the spectrogram.

Figures 19 and 23 show how the words "be" and "pay" appear on this three dimensional plot. These same words were then played into the system from the magnetic tape and spectrograms made at the output. Figures 22 and 26 show how these words looked with no filtering within the system, that is, with no distortion intentionally introduced. Figure 22 should therefore appear the same as Figure 19 and Figure 26 should appear the same as Figure 23. The extent to which this is true is a measure of the excellence of the reproduction. From the figures, it is apparent that the system was reproducing almost perfectly.

Figures 21 and 24 show how these words appeared when a three kilocycle low pass filter was inserted at the output of the transmitting end amplifier with a second three kilocycle low pass filter inserted in the output circuit of the system. Although this introduced distortion that is visible in the spectrograms, it was very difficult to detect by ear.

Figures 20 and 24 show how these words appeared at the output

of the transmitting end amplifier. The distortion in these spectrograms is very apparent. Comparison with Figures 20 and 24 shows the marked improvement in quality that is obtained by using the receiving end amplifier even when employing a restricted bandwidth.

It should be noted that the spectrograms appearing as Figures 21 and 25 were taken with a three kilocycle low pass filter in the output circuit. This filter in general improved the quality of the speech at the output. This effect could have been predicted from the laws of superposition had this been a linear system, as was pointed out in Chapter III. Experimental evidence therefore seems to indicate that results predicted by the laws of superposition may often be approximately correct.

It had been thought possible that since the receiving end amplifier will regenerate some of the harmonics filtered out by a filter at the output of the transmitting end amplifier that in cases of highly restricted bandwidth there might result some improvement in articulation over a linear system. Experimental results indicated the opposite to be true.

An attempt was made to determine the bandwidth requirements of the system versus m for the case of perfect reproduction, that is, complete elimination of filters from within the system. Spectrograms were made from the output of the transmitting end amplifier with various speech sounds at the input and varying values of m . Typical results were obtained with the word, "she". These results are shown in Figures 27 through 31. There was no obvious change in bandwidth requirements over the range in which m could be varied.

In conclusion, it is apparent that this system offers advantages over conventional speech compression or "super modulation" systems by providing a better quality of speech transmission, and in addition it can normally be expected to provide an increase in signal to noise ratio. Unfortunately, no tests have been carried out over long range radio telephone circuits where there is severe phase and amplitude distortion resulting from differences in path lengths between ground and sky waves. It may be that under such circumstances the quality of reproduction would actually be reduced by the transmitting end amplifier. Nevertheless, if the transmitting end amplifier is by-passed at such times, the system will still retain the advantages of conventional speech compression or "super modulation" systems. Thus we can expect this system to normally provide advantages over other systems, and under abnormal condition, its performance will at worst be comparable to other systems.

APPENDIX I

HARMONIC ANALYSIS FOR THE HALF-POWER LAW COMPRESSION OF A COSINUSOIDAL WAVE

This harmonic analysis will provide a description of the wave at the output of the transmitting end amplifier when a sine wave is applied to the input of the system.

This wave may also be described by

$$f(x) = \cos x \quad -\frac{\pi}{2} < x < \frac{\pi}{2}$$

$$f(x) = \cos x \quad \frac{\pi}{2} < x < \frac{3\pi}{2}$$

A plot of this function is given in Figure 17 of the main text.

A regular periodic function of period T may be represented by a Fourier series as follows:

$$f(x) = \frac{A_0}{2} + \sum_{n=1}^{\infty} \left(A_n \cos 2n \frac{\pi}{T} x + B_n \sin 2n \frac{\pi}{T} x \right)$$

where, when C is any constant

$$A_n = \frac{2}{T} \int_C^{C+T} f(x) \cos \frac{2n\pi x}{T} dx$$

$$B_n = \frac{2}{T} \int_C^{C+T} f(x) \sin \frac{2n\pi x}{T} dx$$

A plot of this function is given in Figure 14 of the main text.

Introduction

The purpose of this paper is to study the properties of the function $f(x)$ defined by the following equation:

Let $f(x)$ be a function defined on the interval $[0, 1]$ by the following equation:

For $x \in [0, 1]$, we have $f(x) = \frac{1}{2} + \frac{1}{2}f(2x)$ if $x \in [0, \frac{1}{2}]$ and $f(x) = \frac{1}{2} + \frac{1}{2}f(2x-1)$ if $x \in [\frac{1}{2}, 1]$.

We will study the properties of this function.

First, we will show that $f(x)$ is a continuous function.

$$\lim_{x \rightarrow 0^+} f(x) = \frac{1}{2} \quad \lim_{x \rightarrow 1^-} f(x) = \frac{1}{2}$$

$$\lim_{x \rightarrow \frac{1}{2}^-} f(x) = \frac{1}{2} \quad \lim_{x \rightarrow \frac{1}{2}^+} f(x) = \frac{1}{2}$$

Therefore, $f(x)$ is continuous on $[0, 1]$.

Next, we will show that $f(x)$ is a periodic function.

Let T be the period of $f(x)$. Then $f(x+T) = f(x)$ for all $x \in [0, 1]$.

$$\left(\frac{1}{2} + \frac{1}{2}f(2x) \right) = \frac{1}{2} + \frac{1}{2}f(2(x+T)) \quad \left(\frac{1}{2} + \frac{1}{2}f(2x-1) \right) = \frac{1}{2} + \frac{1}{2}f(2(x+T)-1)$$

Therefore, $T = \frac{1}{2}$ is the period of $f(x)$.

$$\lim_{x \rightarrow 0^+} f(x) = \frac{1}{2} \quad \lim_{x \rightarrow 1^-} f(x) = \frac{1}{2}$$

$$\lim_{x \rightarrow \frac{1}{2}^-} f(x) = \frac{1}{2} \quad \lim_{x \rightarrow \frac{1}{2}^+} f(x) = \frac{1}{2}$$

Therefore, $f(x)$ is a periodic function with period $\frac{1}{2}$.

Taking the region from $\frac{-\pi}{2}$ to $\frac{3\pi}{2}$, $C = \frac{-\pi}{2}$, and $T = 2$

Hence

$$f(x) = \frac{A_0}{2} \sum_{n=1}^{\infty} (A_n \cos nx + B_n \sin nx) \quad \text{Eq. (1)}$$

Where

$$A_n = \frac{1}{\pi} \int_{-\frac{\pi}{2}}^{\frac{3\pi}{2}} f(x) \cos nx dx \quad \text{Eq. (2)}$$

$$B_n = \frac{1}{\pi} \int_{-\frac{\pi}{2}}^{\frac{3\pi}{2}} f(x) \sin nx dx$$

In the wave form shown in Figure 17 of the main text,

$f(x) = f(x + \pi)$, and therefore it will contain no even harmonics.

Furthermore, $f(x) = f(-x)$ and hence the Fourier Series consists of cosine terms alone.

Since we are concerned only with cosine terms and odd harmonics, the region from $\frac{\pi}{2}$ to $\frac{3\pi}{2}$ is merely the negative of the region from $\frac{-\pi}{2}$ to $\frac{\pi}{2}$.

Therefore, we may rewrite Equation (2):

$$A_n = \frac{1}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} f(x) \cos nx dx + \frac{1}{\pi} \int_{\frac{\pi}{2}}^{\frac{3\pi}{2}} f(x + \pi) \cos nx dx \quad \text{Eq. (3)}$$

Let

$$v = x + \pi$$

Let $f(x) = \frac{1}{x^2} = x^{-2}$. Then $f'(x) = -2x^{-3} = -\frac{2}{x^3}$.

(1) $\lim_{x \rightarrow \infty} \left(\frac{1}{x^2} - \frac{1}{x^3} \right) = \lim_{x \rightarrow \infty} \frac{x - 1}{x^3} = \frac{1 - 0}{\infty} = 0$

(2) $\lim_{x \rightarrow 0} \left(\frac{1}{x^2} - \frac{1}{x^3} \right) = \lim_{x \rightarrow 0} \frac{x - 1}{x^3} = \frac{-1}{0} = \infty$

(3) $\lim_{x \rightarrow 0} \left(\frac{1}{x^2} + \frac{1}{x^3} \right) = \lim_{x \rightarrow 0} \frac{x + 1}{x^3} = \frac{1}{0} = \infty$

For the first part, we have $f(x) = \frac{1}{x^2}$ and $g(x) = \frac{1}{x^3}$. Then $f(x) - g(x) = \frac{1}{x^2} - \frac{1}{x^3} = \frac{x - 1}{x^3}$. As $x \rightarrow \infty$, the numerator $x - 1 \rightarrow \infty$ and the denominator $x^3 \rightarrow \infty$. We can use L'Hôpital's rule: $\lim_{x \rightarrow \infty} \frac{x - 1}{x^3} = \lim_{x \rightarrow \infty} \frac{1}{3x^2} = 0$.

(1) $\lim_{x \rightarrow \infty} \left(\frac{1}{x^2} - \frac{1}{x^3} \right) = 0$

(2) $\lim_{x \rightarrow 0} \left(\frac{1}{x^2} - \frac{1}{x^3} \right) = \infty$

Then

$$dv = dx$$

$$\cos n(v - \pi) = \cos(nv - n\pi)$$

Since we are concerned only with terms for which n is odd,

$$\cos n(v - \pi) = -\cos nv.$$

Substituting into Equation (3),

$$A_n \frac{1}{\pi} \int_{\frac{\pi}{2}}^{\frac{\pi}{2}} f(x) \cos nx dx + \frac{1}{\pi} \int_{\frac{\pi}{2}}^{\frac{\pi}{2}} -f(v) \cos nv dv$$

or

$$A_n \frac{2}{\pi} \int_{\frac{\pi}{2}}^{\frac{\pi}{2}} f(x) \cos nx dx \quad \text{Eq. (4)}$$

Since it is of interest to know the average value of the function and since it is helpful in the mathematics that follows, the average value of the function, referred to as C , will first be determined.

$$C = \frac{1}{\pi} \int_{\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{1/2} x dx$$

Since $f(x) = f(-x)$,

$$C = \frac{2}{\pi} \int_0^{\frac{\pi}{2}} \cos^{1/2} x dx \quad \text{Eq. (5)}$$

Reference to Dwight 854.1¹⁰ gives

$$\int_0^{\frac{\pi}{2}} \cos^m x dx = \frac{1}{2} \sqrt{\pi} \cdot \frac{\Gamma(\frac{m}{2} + \frac{1}{2})}{\Gamma(\frac{m}{2} + 1)}, \text{ if } m > -1 \quad \text{Eq. (6)}$$

Thus

$$C = \frac{2}{\pi} \left[\frac{1}{2} \sqrt{\pi} \cdot \frac{\Gamma(\frac{1}{2} + \frac{1}{2})}{\Gamma(\frac{1}{2} + 1)} \right] = \frac{1}{\sqrt{\pi}} \cdot \frac{\Gamma(\frac{3}{4})}{\Gamma(\frac{5}{4})}$$

Since

$$\Gamma(\alpha + 1) = \alpha \Gamma(\alpha) \quad \text{Eq. (7)}$$

$$\Gamma(\frac{3}{4} + 1) = \frac{3}{4} \Gamma(\frac{3}{4})$$

$$\Gamma(\frac{3}{4}) = \frac{4}{3} \Gamma(1.75)$$

$$\Gamma(\frac{3}{4}) = 1.22 \quad \text{Eq. (8)}$$

$$\Gamma(\frac{5}{4}) = 0.905 \quad \text{Eq. (9)}$$

By Equations 8 and 9:

$$C = \frac{1}{\sqrt{\pi}} \cdot \frac{1.22}{0.905} = 0.751 \quad \text{Eq. (10)}$$

From Equation (4),

$$A_1 = \frac{1}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{1/2} x \cos x dx$$

$$A_1 = \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{3/2} x dx \quad \text{Eq. (11)}$$

1957

$$(1957 - 1956) \times 100 = (1.1 - 1.0) \times 100 = 10\%$$

1957 is a record year for the country (1957 is a record year for the country)

$$1957 - 1956 = 1.1 - 1.0 = 0.1$$

(1) 1957 is a record year for the country

$$1957 - 1956 = 1.1 - 1.0 = 0.1$$

1957

(1) 1957

$$1957 - 1956 = 1.1 - 1.0 = 0.1$$

1957 is a record year for the country (1957 is a record year for the country) and some other factors in the country (1957 is a record year for the country) and some other factors in the country (1957 is a record year for the country)

$$1957 - 1956 = 1.1 - 1.0 = 0.1$$

(1) 1957 is a record year for the country

(1) 1957

$$1957 - 1956 = 1.1 - 1.0 = 0.1$$

Reference to Dwight 854.1¹⁰ gives

$$\int_0^{\frac{\pi}{2}} \cos^m x dx = \frac{1}{2} \sqrt{\pi} \cdot \frac{\Gamma(\frac{m}{2} + \frac{1}{2})}{\Gamma(\frac{m}{2} + 1)}, \text{ if } m > -1 \quad \text{Eq. (6)}$$

Thus

$$C = \frac{2}{\pi} \left[\frac{1}{2} \sqrt{\pi} \cdot \frac{(\frac{1}{2} + \frac{1}{2})}{(\frac{1}{2} + 1)} \right] = \frac{1}{\sqrt{\pi}} \cdot \frac{\Gamma(\frac{3}{4})}{\Gamma(\frac{5}{4})}$$

Since

$$\Gamma(\alpha + 1) = \alpha \Gamma(\alpha) \quad \text{Eq. (7)}$$

$$\Gamma(\frac{3}{4} + 1) = \frac{3}{4} \Gamma(\frac{3}{4})$$

$$\Gamma(\frac{3}{4}) = \frac{4}{3} \Gamma(1.75)$$

$$\Gamma(\frac{3}{4}) = 1.22 \quad \text{Eq. (8)}$$

$$\Gamma(\frac{5}{4}) = 0.905 \quad \text{Eq. (9)}$$

By Equations 8 and 9:

$$C = \frac{1}{\sqrt{\pi}} \cdot \frac{1.22}{0.905} = 0.751 \quad \text{Eq. (10)}$$

From Equation (4),

$$A_1 = \frac{1}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{1/2} x \cos x dx$$

$$A_1 = \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{3/2} x dx \quad \text{Eq. (11)}$$

QUESTION 1 (10 marks)

(i) Find $\frac{dy}{dx}$ if $y = \frac{(x^2 - 1)^3}{(x^2 + 1)^2}$ using the quotient rule.

ANSWER

$$\frac{dy}{dx} = \frac{3(x^2 - 1)^2(2x)(x^2 + 1)^2 - (x^2 - 1)^3(2x)(x^2 + 1)}{(x^2 + 1)^4}$$

QUESTION 2 (10 marks)

(i) Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the power rule.

(ii) Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the quotient rule.

(iii) Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the chain rule.

(iv) Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the product rule.

(v) Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the implicit differentiation.

QUESTION 3 (10 marks)

(i) Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the quotient rule.

(ii) Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the power rule.

QUESTION 4 (10 marks)

Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the quotient rule.

(ii) Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the power rule.

Find $\frac{dy}{dx}$ if $y = \frac{1}{x^2}$ using the chain rule.

Let

$$dv = \cos x \quad u = \cos^{1/2} x dx$$

$$v = \sin x \quad du = \frac{1}{2} \cos^{-1/2} x \sin x dx$$

$$A_1 = \frac{2}{\pi} \left[\cos^{1/2} x \sin x \right]_{-\pi/2}^{\pi/2} + \frac{2}{2\pi} \int_{-\pi/2}^{\pi/2} \cos^{-1/2} x \sin^2 x dx$$

$$= 0 + \frac{1}{\pi} \int_{-\pi/2}^{\pi/2} \cos^{-1/2} x (1 - \cos^2 x) dx$$

$$= \frac{1}{\pi} \int_{-\pi/2}^{\pi/2} \cos^{-1/2} x dx - \frac{1}{\pi} \int_{-\pi/2}^{\pi/2} \cos^{3/2} x dx$$

From Equation (11), and since $f(x) = f(-x)$,

$$\frac{3}{2} A_1 = \frac{2}{\pi} \int_0^{\pi/2} \cos^{-1/2} x dx$$

Employing Equation (6):

$$A_1 = \frac{2}{3\pi} \cdot \frac{\Gamma(\frac{1}{4})}{\Gamma(\frac{3}{4})} \quad \text{Eq. (12)}$$

By Equation (7)

$$\Gamma(\frac{1}{4} + 1) = \frac{1}{4} \Gamma(\frac{1}{4})$$

$$\Gamma(\frac{1}{4}) = 4 \Gamma(\frac{5}{4})$$

$$= 3.62$$

$$\lim_{n \rightarrow \infty} \frac{1}{n} \sum_{k=1}^n f\left(\frac{k}{n}\right) = \int_0^1 f(x) dx$$

$$\lim_{n \rightarrow \infty} \frac{1}{n} \sum_{k=1}^n f\left(\frac{k}{n}\right) = \int_0^1 f(x) dx$$

$$\lim_{n \rightarrow \infty} \frac{1}{n} \sum_{k=1}^n f\left(\frac{k}{n}\right) = \int_0^1 f(x) dx$$

$$\lim_{n \rightarrow \infty} \frac{1}{n} \sum_{k=1}^n f\left(\frac{k}{n}\right) = \int_0^1 f(x) dx$$

$$\lim_{n \rightarrow \infty} \frac{1}{n} \sum_{k=1}^n f\left(\frac{k}{n}\right) = \int_0^1 f(x) dx$$

From (1) and (2) we have

$$\lim_{n \rightarrow \infty} \frac{1}{n} \sum_{k=1}^n f\left(\frac{k}{n}\right) = \int_0^1 f(x) dx$$

Therefore (1) is proved.

$$(1) \quad \lim_{n \rightarrow \infty} \frac{1}{n} \sum_{k=1}^n f\left(\frac{k}{n}\right) = \int_0^1 f(x) dx$$

Q.E.D.

$$\lim_{n \rightarrow \infty} \frac{1}{n} \sum_{k=1}^n f\left(\frac{k}{n}\right) = \int_0^1 f(x) dx$$

$$\lim_{n \rightarrow \infty} \frac{1}{n} \sum_{k=1}^n f\left(\frac{k}{n}\right) = \int_0^1 f(x) dx$$

From Equations (8), (9) and (12),

$$A_1 = \frac{2}{2\pi} \cdot \frac{3.62}{1.22}$$

$$A_1 = 0.112 \quad \text{Eq. (13)}$$

$$\begin{aligned} A_3 &= \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{1/2} x \cos 3x dx \\ &= \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 4 \cos^{7/2} x - 3 \cos^{3/2} x \quad \text{Eq. (14)} \end{aligned}$$

From Equations (11) and (13):

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{3/2} x dx = (\pi) (0.559) \quad \text{Eq. (15)}$$

$$A_3 = \frac{8}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{7/2} x - (6) (0.559)$$

Let

$$\begin{aligned} u &= \cos^{5/2} x & dv &= \cos x dx \\ du &= -\frac{5}{2} \cos^{3/2} x \sin x dx & v &= \sin x \end{aligned}$$

$$A_3 = \frac{8}{\pi} \left[\cos^{5/2} x \sin x \right]_{-\frac{\pi}{2}}^{\frac{\pi}{2}} + \frac{8}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \frac{5}{2} \cos^{3/2} x \sin^2 x dx - (3)(0.559)$$

$$A_3 = 0 + \frac{20}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{3/2} x dx - \frac{20}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{7/2} x dx - (3)(0.559)$$

Substituting from Equations (14) and (15)

$$\cos^{7/2} x = \frac{\pi}{2} [A_3 + (3)(0.559)]$$

$$A_3 = \frac{20}{\pi} (\pi) (0.559) - \frac{20}{\pi} \left(\frac{\pi}{4} \right) [A_3 + (3)(0.559)] - (6) (0.559)$$

$$= \frac{4}{7} (0.559) [10 - \frac{15}{2} - 3]$$

$$= 0.160$$

From Equation (4)

$$A_5 = \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{1/2} x \cos 5x$$

$$A_5 = \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (16 \cos^{11/2} x - 20 \cos^{7/2} x + 5 \cos^{3/2} x) dx \quad \text{Eq. (17)}$$

$$= \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} 16 \cos^{11/2} x dx - \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (20 \cos^{7/2} x - 5 \cos^{3/2} x) dx$$

$$\text{Let } v = \cos^{9/2} x, \quad dv = -\frac{9}{2} \cos^{7/2} x \sin x dx$$

Then

$$dv = -\frac{9}{2} \cos^{7/2} x \sin x dx, \quad u = \sin x$$

1. The first part of the paper is devoted to the study of the asymptotic behavior of the solutions of the system (1) as $t \rightarrow \infty$. It is shown that the solutions of the system (1) tend to zero as $t \rightarrow \infty$ if and only if the matrix A is Hurwitz stable.

$$(\mathcal{L} \otimes \mathcal{L}^*) (t) = \sum_{i,j} \langle \mathcal{L}^i, \mathcal{L}^j \rangle \langle \mathcal{L}^i, \mathcal{L}^j \rangle \langle \mathcal{L}^i, \mathcal{L}^j \rangle$$

[illegible]

[illegible]

$$\begin{aligned}
A_5 &= \frac{2}{\pi} \left[16 \cos^{9/2} x \sin x \right]_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \\
&+ \frac{2}{\pi} \left[16 \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \frac{9}{2} \cos^{7/2} x \sin^2 x dx - \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (20 \cos^{7/2} x - 5 \cos^{3/2} x) dx \right] \\
&= \frac{2}{\pi} \left[16(0) + 16 \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \frac{9}{2} (\cos^{7/2} x - \cos^{11/2} x) dx \right. \\
&\quad \left. - \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (20 \cos^{7/2} x - 5 \cos^{3/2} x) dx \right] \\
&= \frac{2}{\pi} \left[72 \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{7/2} x dx - 72 \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{11/2} x dx \right. \\
&\quad \left. - \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (20 \cos^{7/2} x - 5 \cos^{3/2} x) dx \right]
\end{aligned}$$

From Equation (17)

$$\begin{aligned}
\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{11/2} x dx &= \frac{\pi}{2} \left(\frac{1}{16} \right) \left[A_5 + \frac{2}{\pi} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} (20 \cos^{7/2} x - 5 \cos^{3/2} x) dx \right] \\
A_5 &= \frac{2}{\pi} \left[52 \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{7/2} x dx - \frac{\pi}{2} \left(\frac{9}{2} \right) A_5 - 90 \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{7/2} x dx \right]
\end{aligned}$$

$$\frac{1}{2} (\cos \theta + i \sin \theta) = \frac{1}{2} e^{i\theta}$$

$$\frac{1}{2} (\cos \theta + i \sin \theta) = \frac{1}{2} e^{i\theta} \quad \frac{1}{2} (\cos \theta - i \sin \theta) = \frac{1}{2} e^{-i\theta}$$

$$\frac{1}{2} (\cos \theta + i \sin \theta) = \frac{1}{2} e^{i\theta} \quad \frac{1}{2} (\cos \theta - i \sin \theta) = \frac{1}{2} e^{-i\theta}$$

$$\frac{1}{2} (\cos \theta + i \sin \theta) = \frac{1}{2} e^{i\theta} \quad \frac{1}{2} (\cos \theta - i \sin \theta) = \frac{1}{2} e^{-i\theta}$$

$$\frac{1}{2} (\cos \theta + i \sin \theta) = \frac{1}{2} e^{i\theta} \quad \frac{1}{2} (\cos \theta - i \sin \theta) = \frac{1}{2} e^{-i\theta}$$

$$\frac{1}{2} (\cos \theta + i \sin \theta) = \frac{1}{2} e^{i\theta} \quad \frac{1}{2} (\cos \theta - i \sin \theta) = \frac{1}{2} e^{-i\theta}$$

(11) $\cos \theta = \frac{e^{i\theta} + e^{-i\theta}}{2}$

$$\cos \theta = \frac{e^{i\theta} + e^{-i\theta}}{2} \quad \sin \theta = \frac{e^{i\theta} - e^{-i\theta}}{2i}$$

$$\cos \theta = \frac{e^{i\theta} + e^{-i\theta}}{2} \quad \sin \theta = \frac{e^{i\theta} - e^{-i\theta}}{2i}$$

$$+ \frac{45}{2} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{3/2} x dx + 5 \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{3/2} x dx$$

$$A_5 = \frac{2}{11} \left(\frac{2}{\pi} \right) \left[-58 \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{7/2} x dx + \frac{55}{2} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{3/2} x dx \right] \quad \text{Eq. (18)}$$

From Equation (14)

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{7/2} x dx = \frac{\pi}{2} \cdot \frac{1}{4} A_3 + \frac{3}{4} \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{3/2} x dx \quad \text{Eq. (19)}$$

From Equations (15) and (16)

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{7/2} x dx = \frac{\pi}{2} \left[\frac{1}{4} (-0.160) + \frac{3}{2} (0.559) \right]$$

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^{7/2} x dx = \frac{\pi}{2} (0.7985) \quad \text{Eq. (19)}$$

From equations (15), (18) and (19),

$$A_5 = \frac{2}{11} \left(\frac{2}{\pi} \right) \left[-38 \left(\frac{\pi}{2} \right) (0.7985) + 55 \left(\frac{\pi}{2} \right) (0.559) \right]$$

$$A_5 = 0.0731$$

This completes the Fourier series up through terms of the fifth order for the waveform in Figure 14 of Chapter III. Hence

$$f(x) = 1.120 \cos x - 0.160 \cos 3x + 0.731 \cos 5x$$

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^2 x \, dx = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \frac{1 + \cos 2x}{2} \, dx$$

$$(17) \quad \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^4 x \, dx = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^2 x \cdot \cos^2 x \, dx = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \left(\frac{1 + \cos 2x}{2} \right) \left(\frac{1 + \cos 2x}{2} \right) \, dx$$

From equation (16)

$$(18) \quad \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^4 x \, dx = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \left(\frac{1}{4} + \frac{1}{2} \cos 2x + \frac{1}{4} \cos^2 2x \right) \, dx$$

From equation (17) and (18)

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^2 x \, dx = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \left(\frac{1}{4} + \frac{1}{2} \cos 2x + \frac{1}{4} \cos^2 2x \right) \, dx$$

$$(19) \quad \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^4 x \, dx = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \left(\frac{1}{4} + \frac{1}{2} \cos 2x + \frac{1}{4} \cos^2 2x \right) \, dx$$

From equation (18) and (19)

$$\int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^2 x \, dx = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \left(\frac{1}{4} + \frac{1}{2} \cos 2x + \frac{1}{4} \cos^2 2x \right) \, dx$$

From equation (18) and (19) we get

From equation (18) and (19) we get

$$(20) \quad \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \cos^2 x \, dx = \int_{-\frac{\pi}{2}}^{\frac{\pi}{2}} \left(\frac{1}{4} + \frac{1}{2} \cos 2x + \frac{1}{4} \cos^2 2x \right) \, dx$$

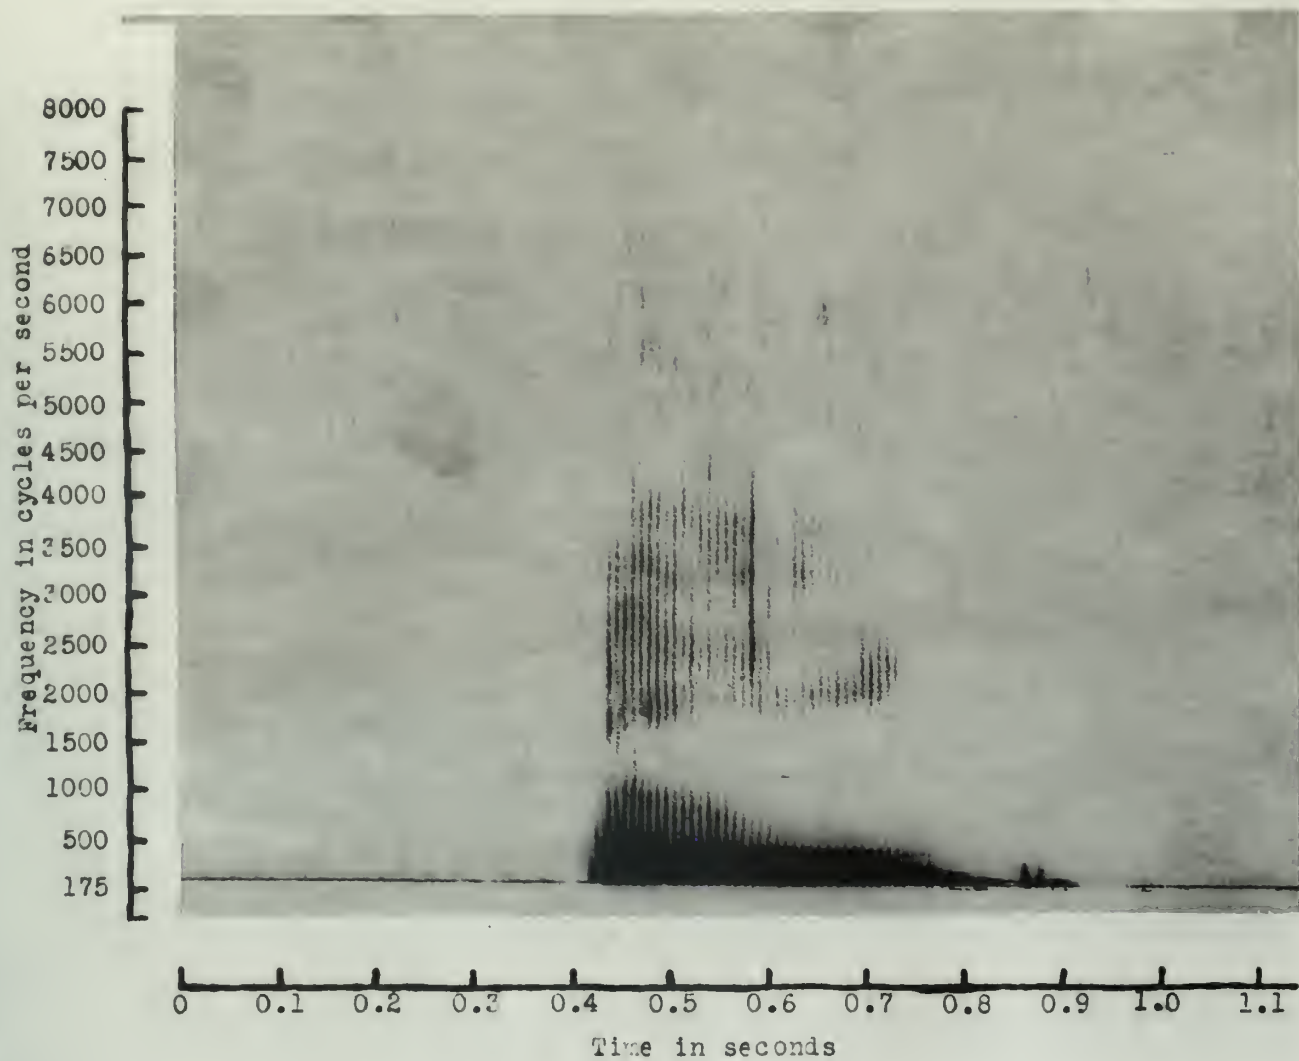


Figure 19

Spectrogram of the word "be" at the input to the system

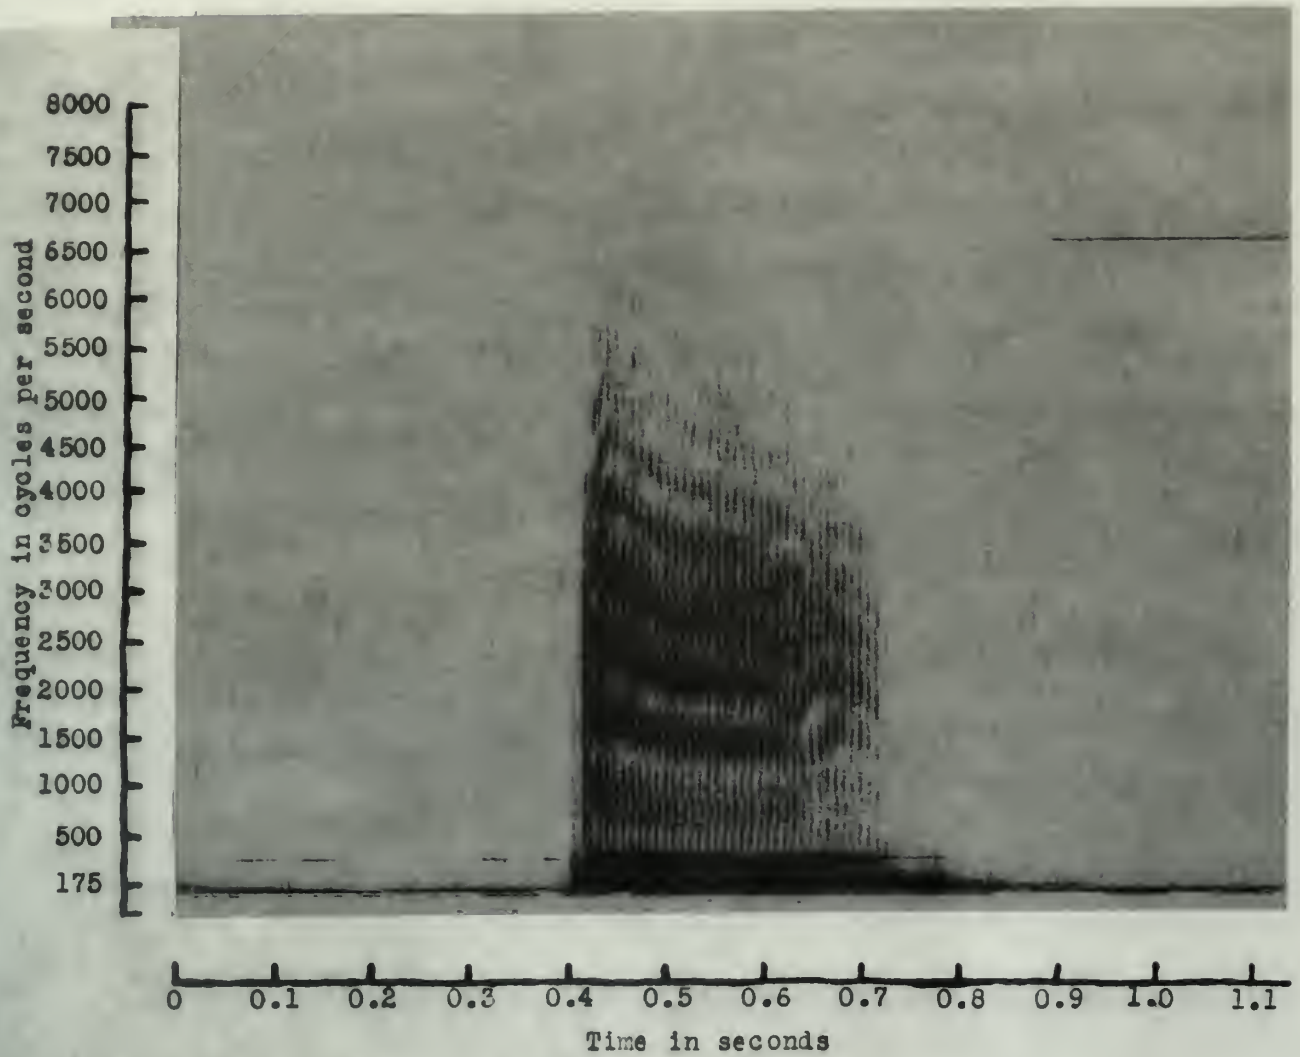


Figure 20

Spectrogram of the word "be" at output of 3,000 cycle low pass filter following transmitting end amplifier

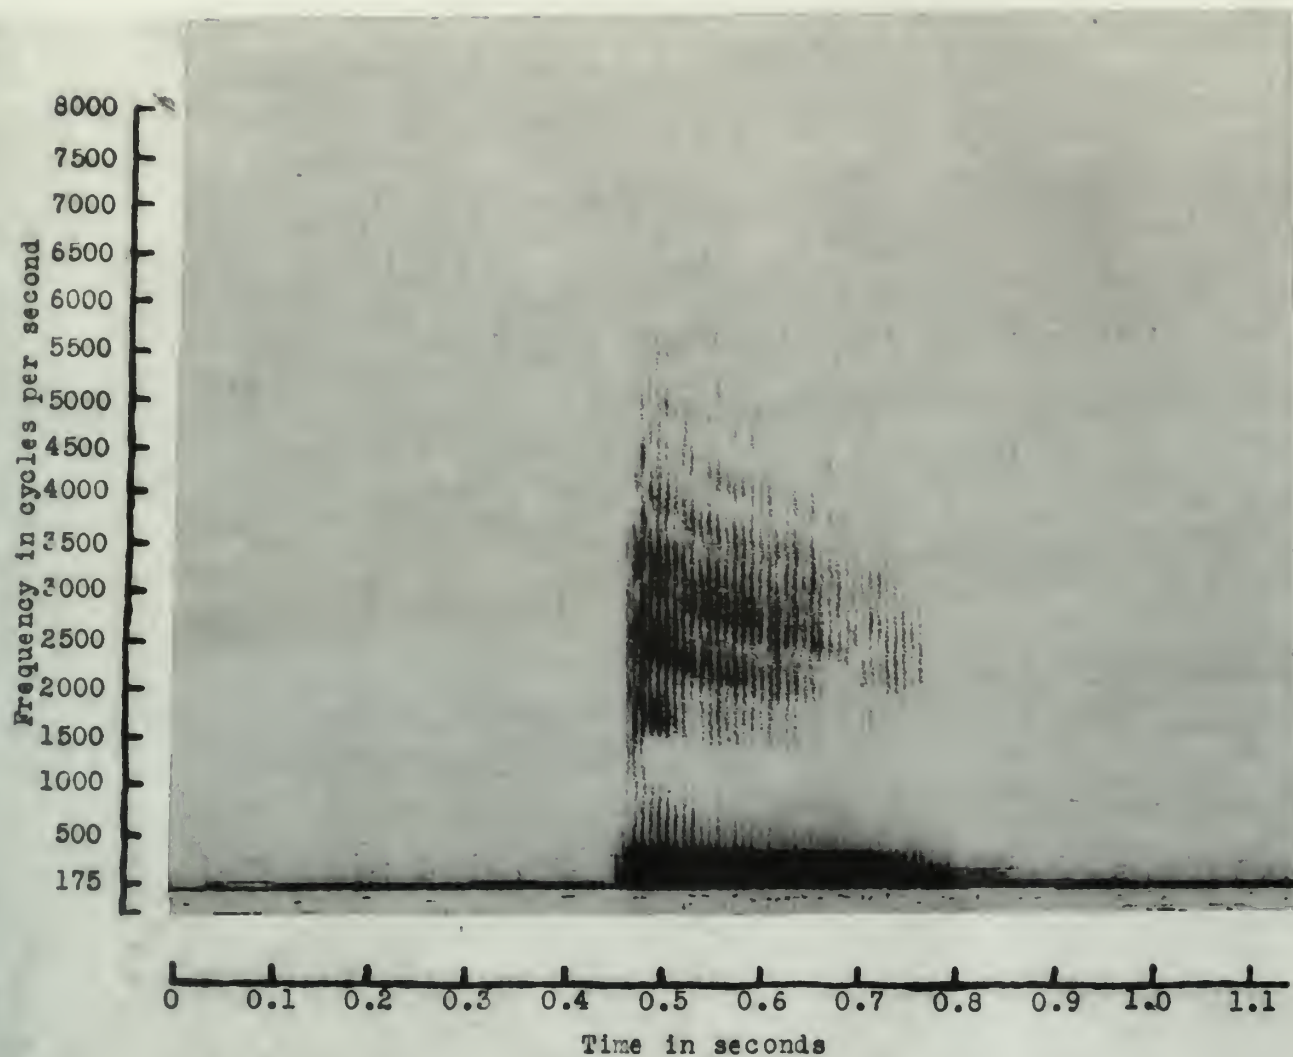


Figure 21

Spectrogram of the word "be" at output of system with a 3.000 cycle low pass filter at output of transmitting end amplifier and also in the output circuit of the system.

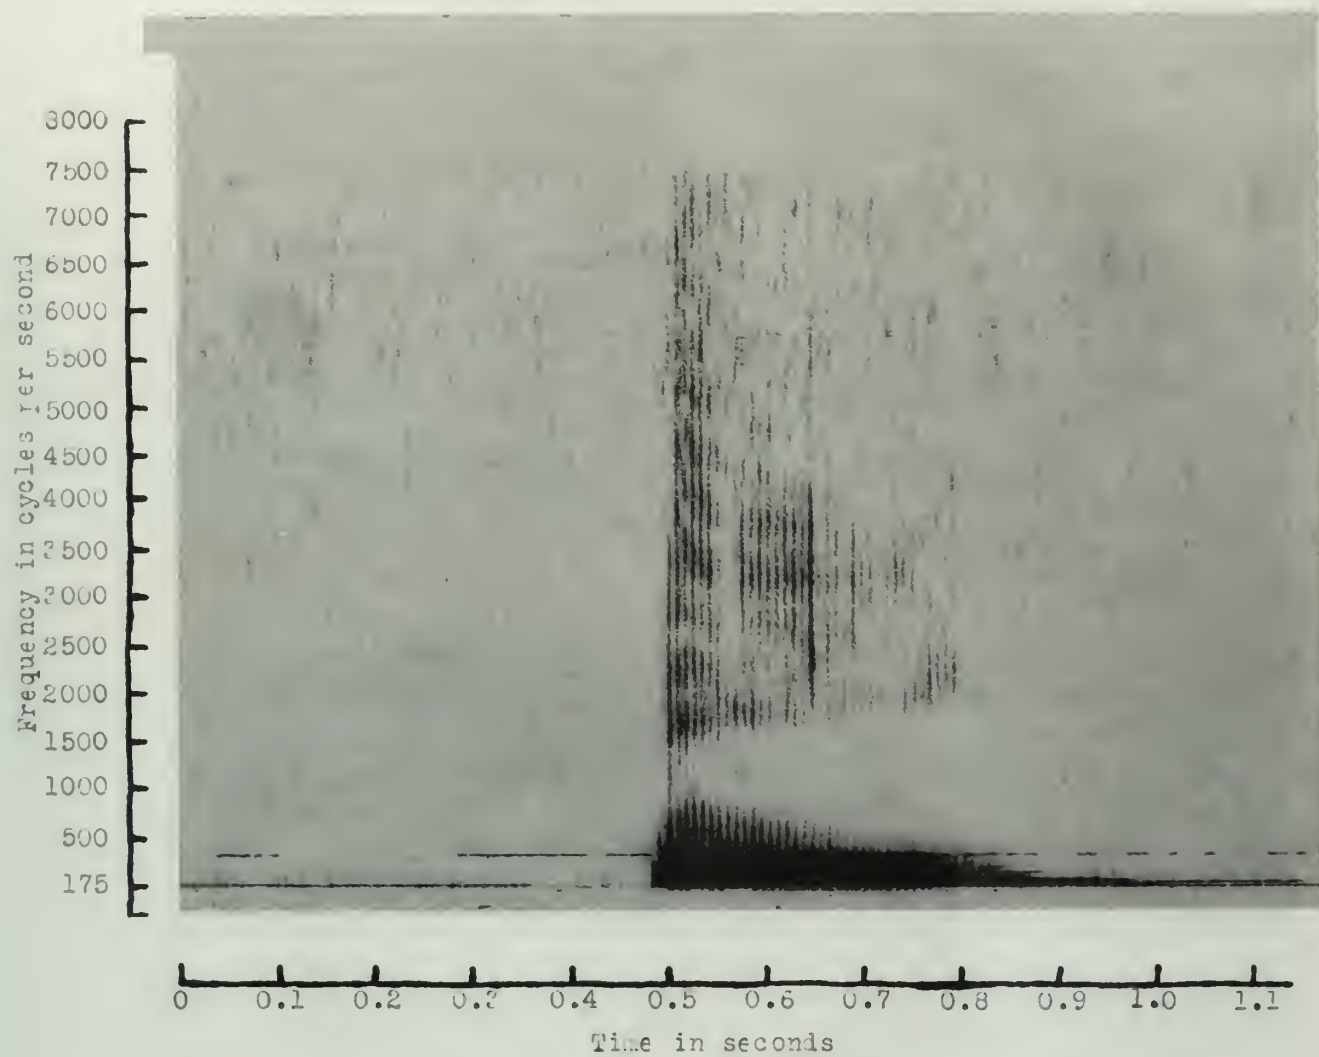


Figure 22

Spectrogram of the word "be" at output of the system
with no filters in the system.

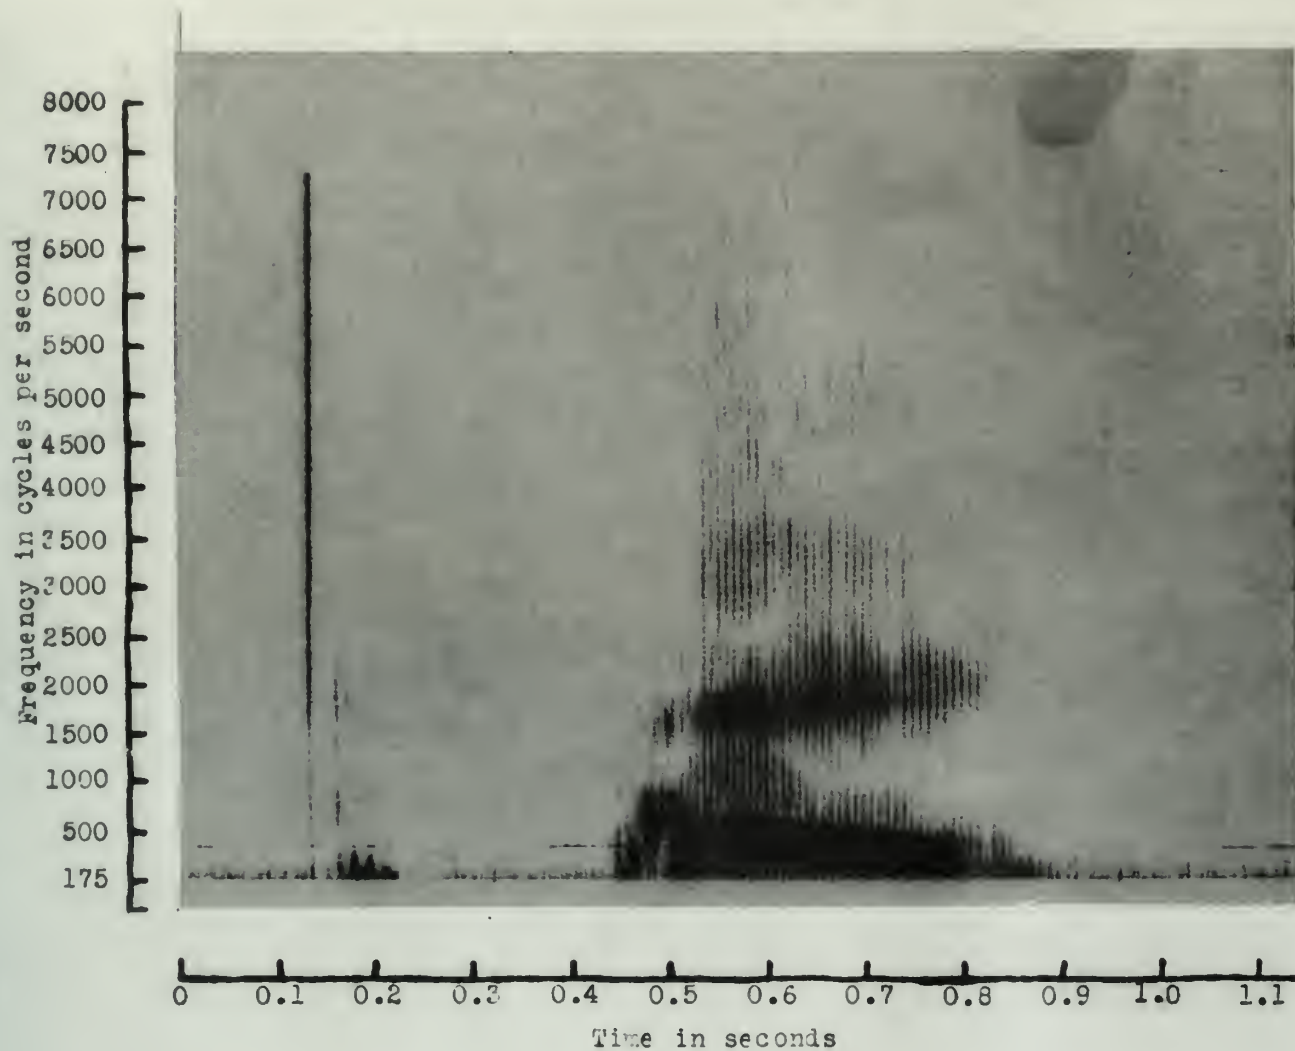


Figure 23

Spectrogram of the word "pay" at the input to the system.

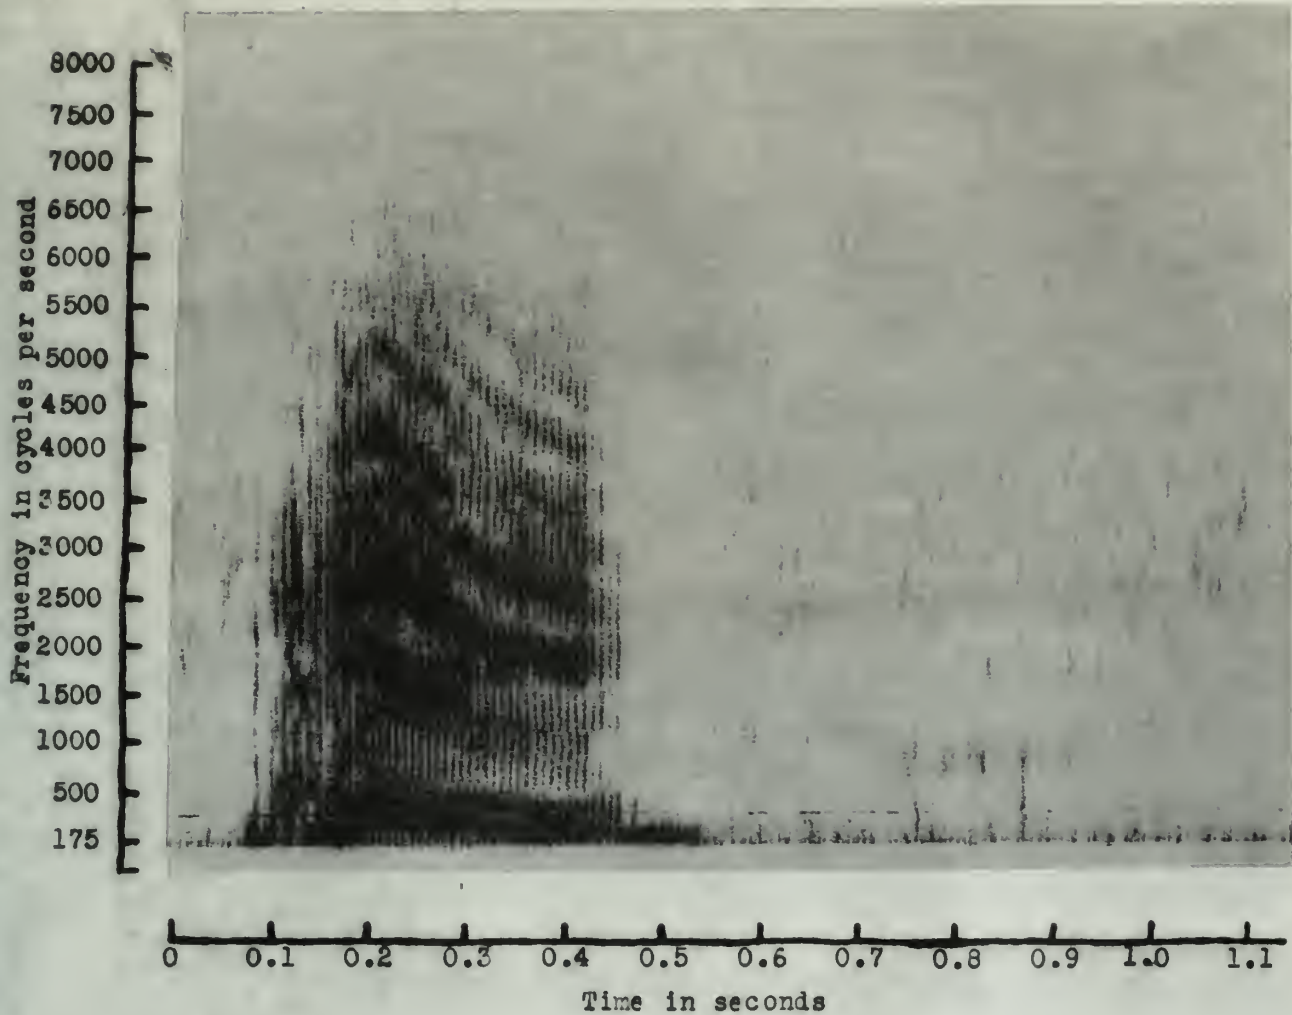


Figure 24.

Spectrogram of the word "pay" at output of 3,000 cycle low pass filter following transmitting end amplifier.

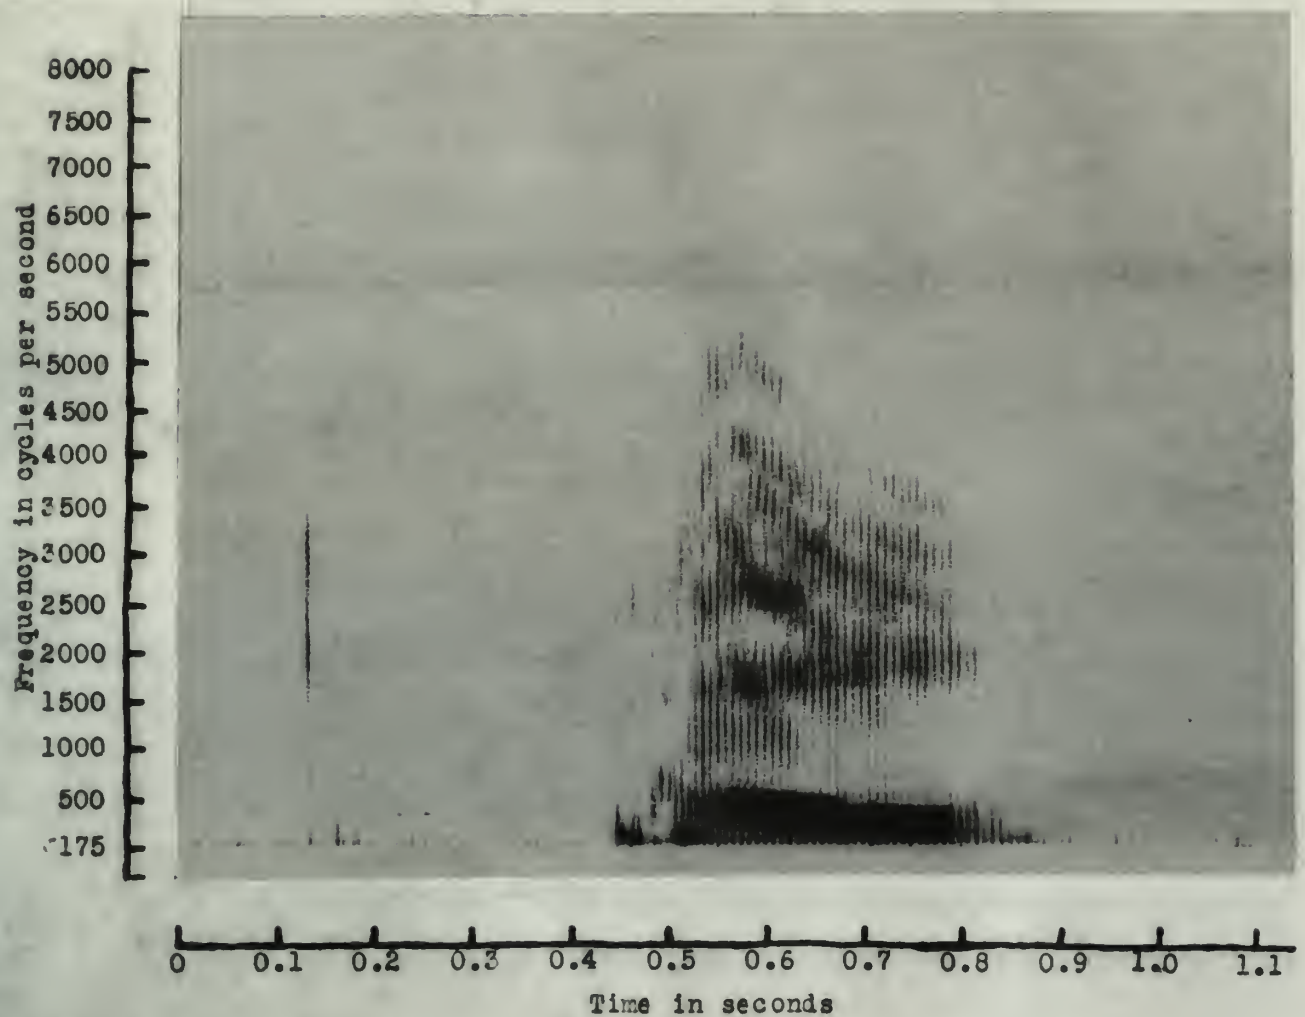


Figure 25

Spectrogram of the word "pay" at output of system with a 3,000 cycle low pass filter at output of transmitting end amplifier and also in the output circuit of the system.

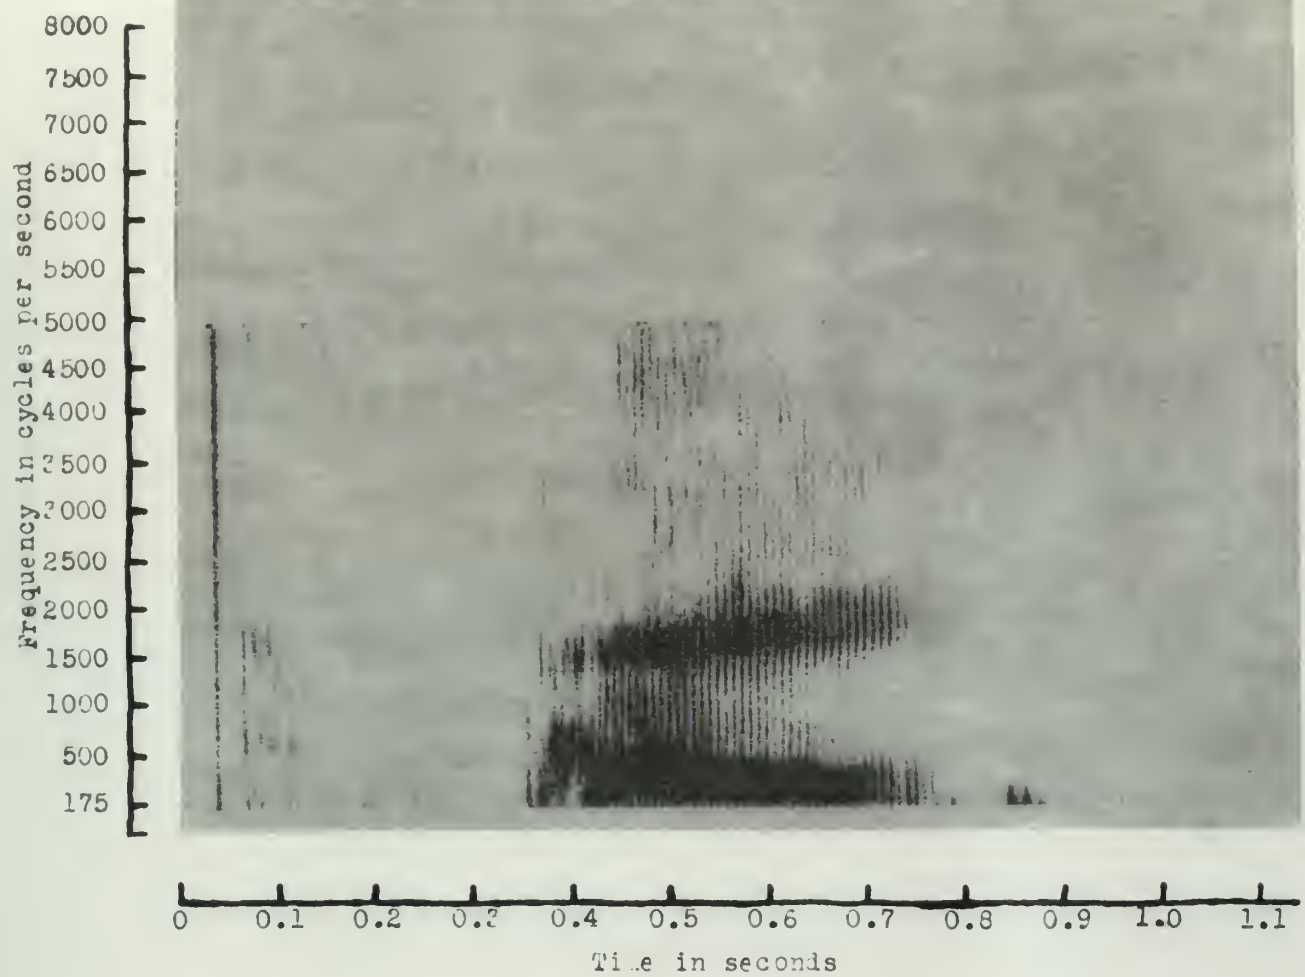


Figure 26

Spectrogram of the word "pay" at output of the system with no filters in the system.

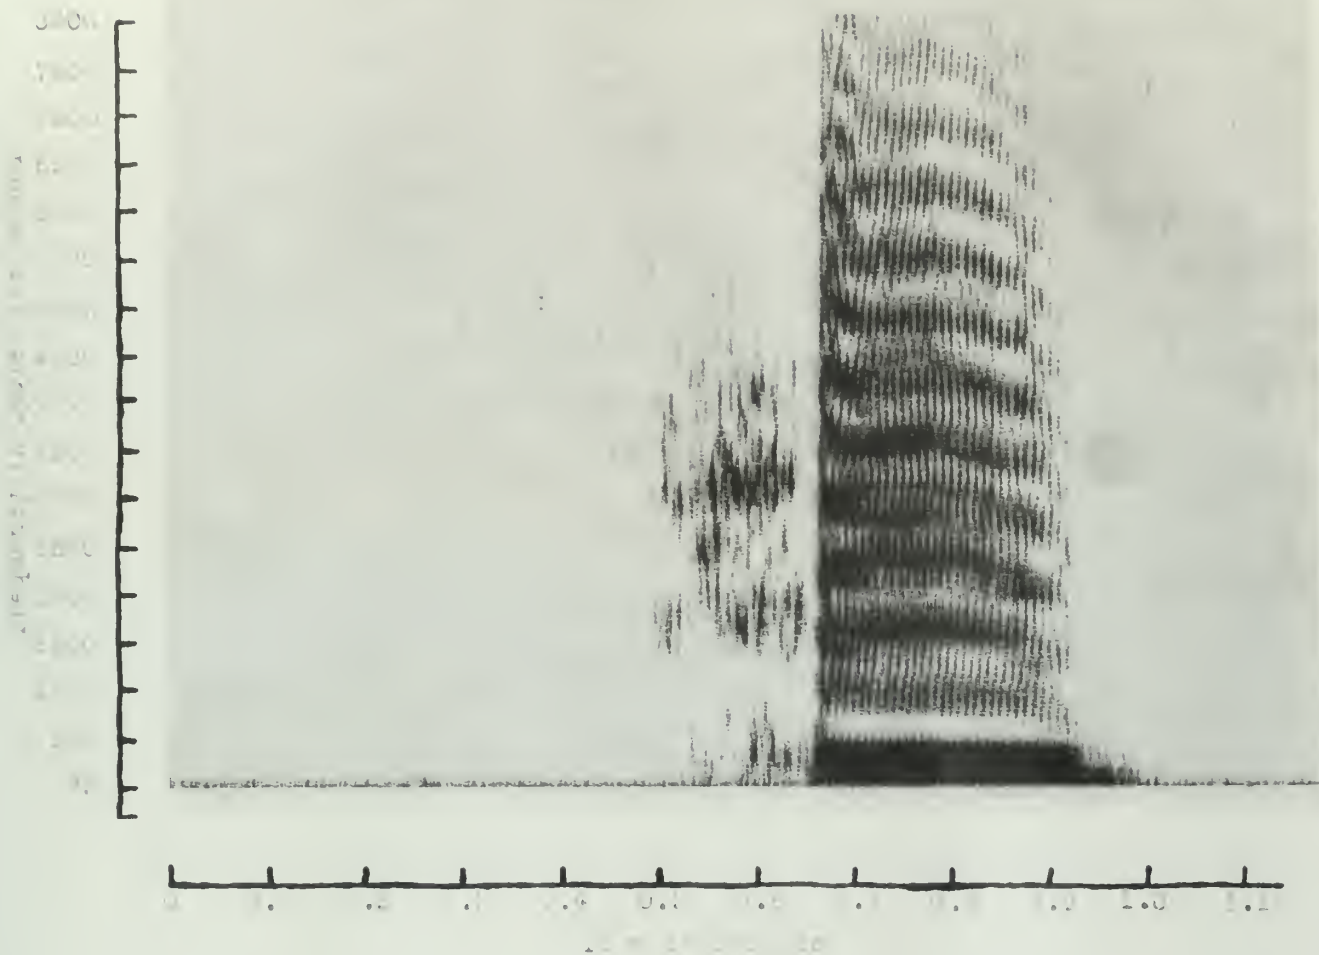


Figure 27

Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.375$.

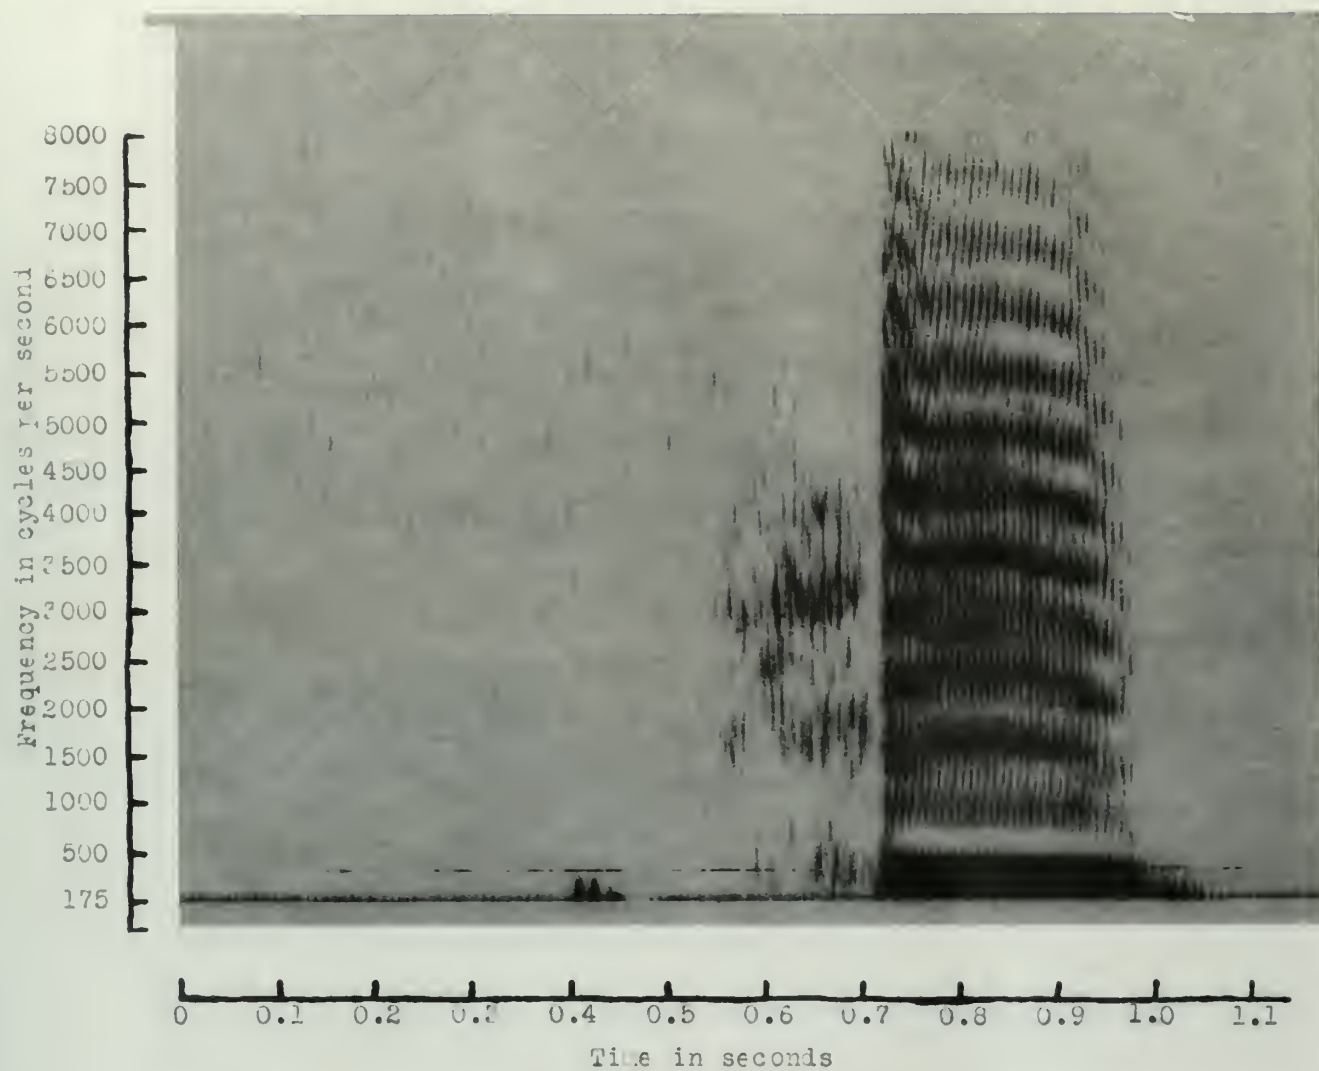


Figure 28

Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.425$

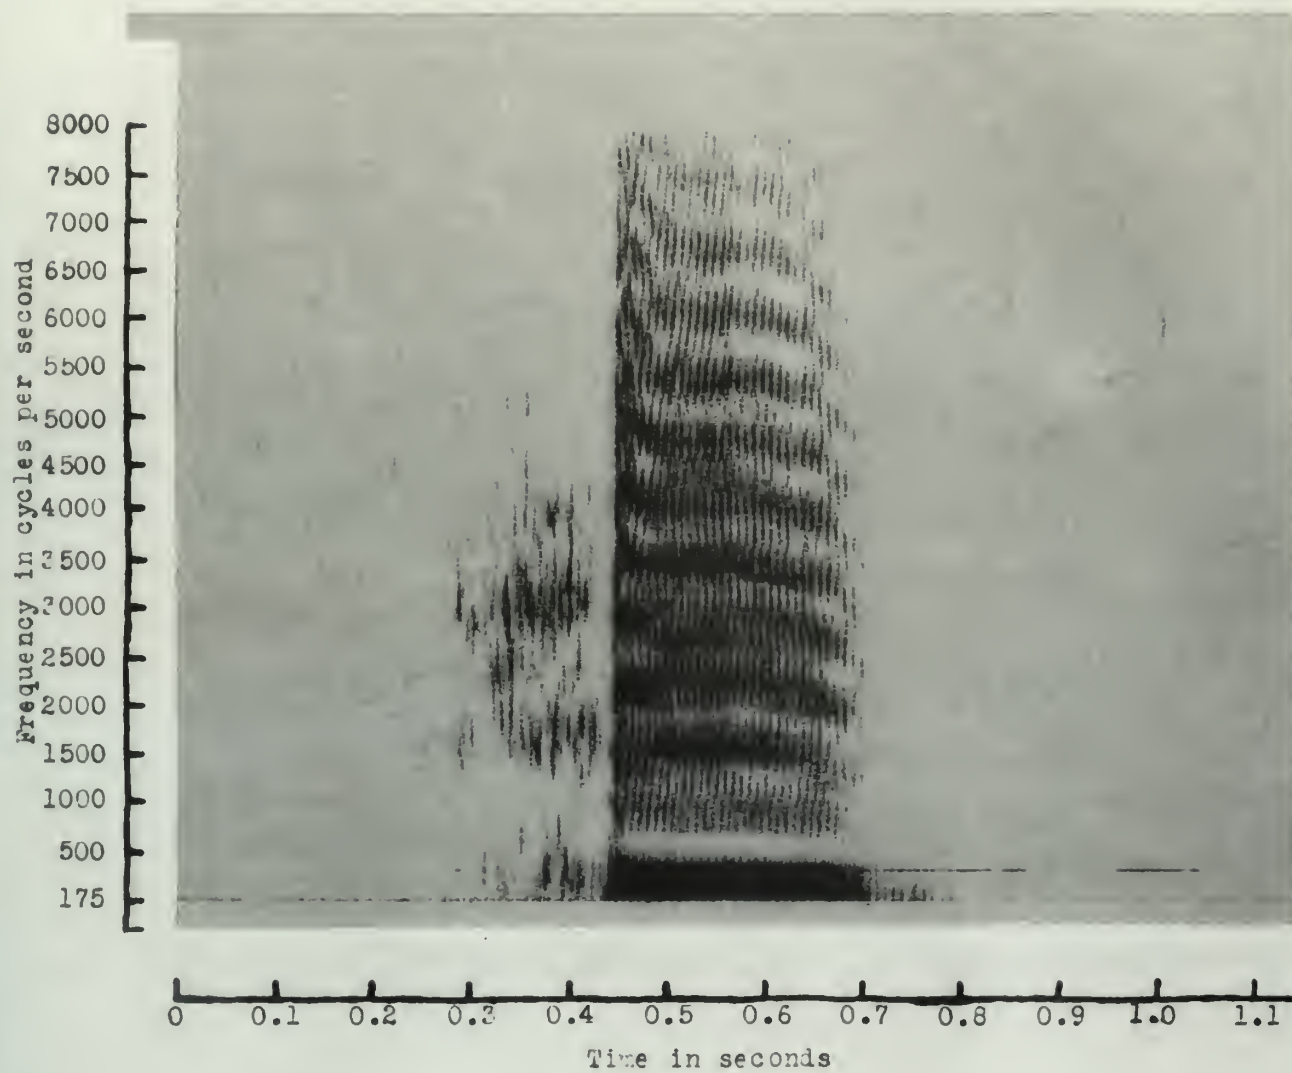


Figure 29

Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.475$

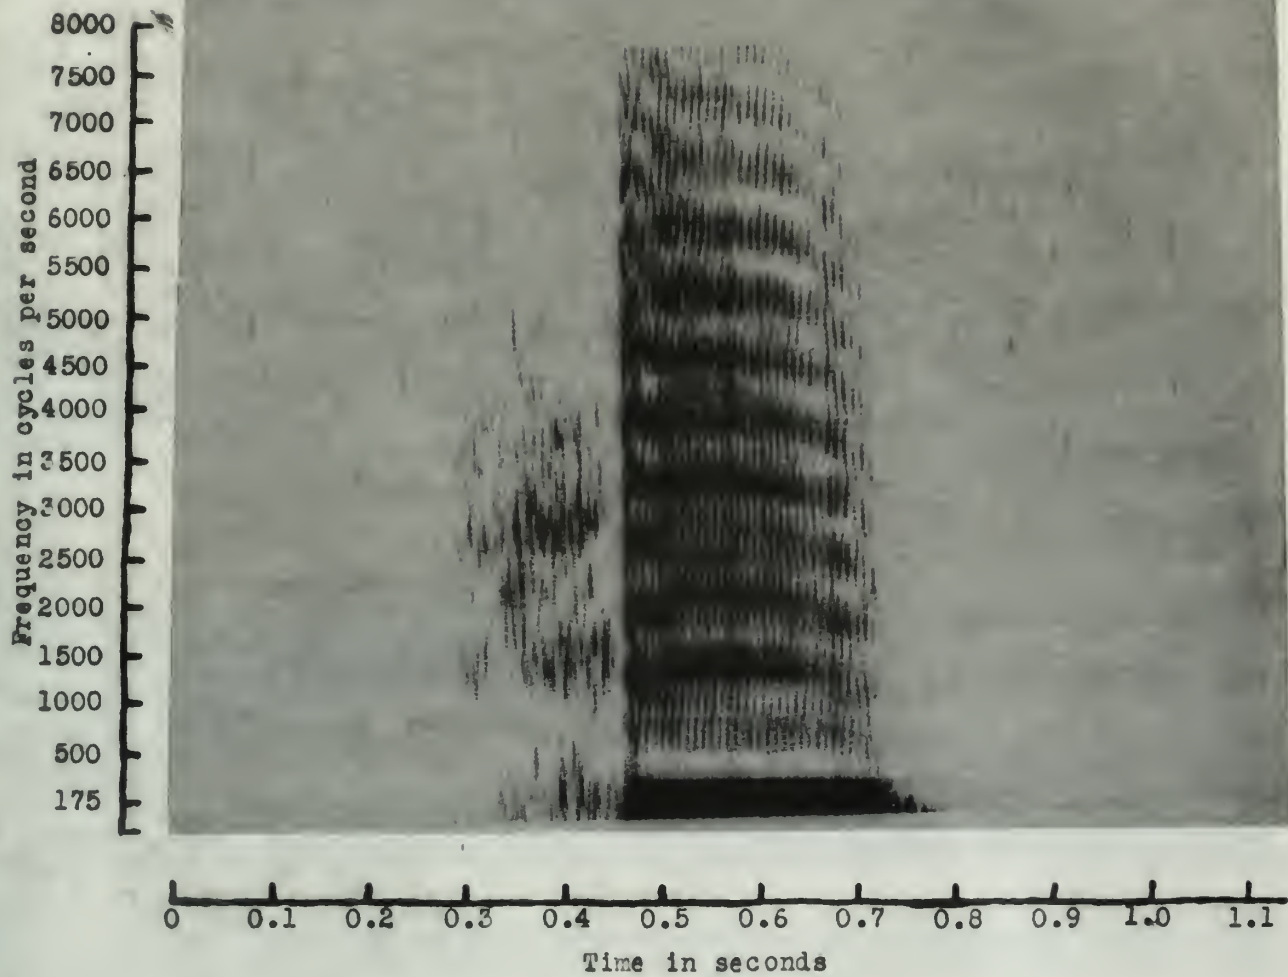


Figure 30

Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.525$

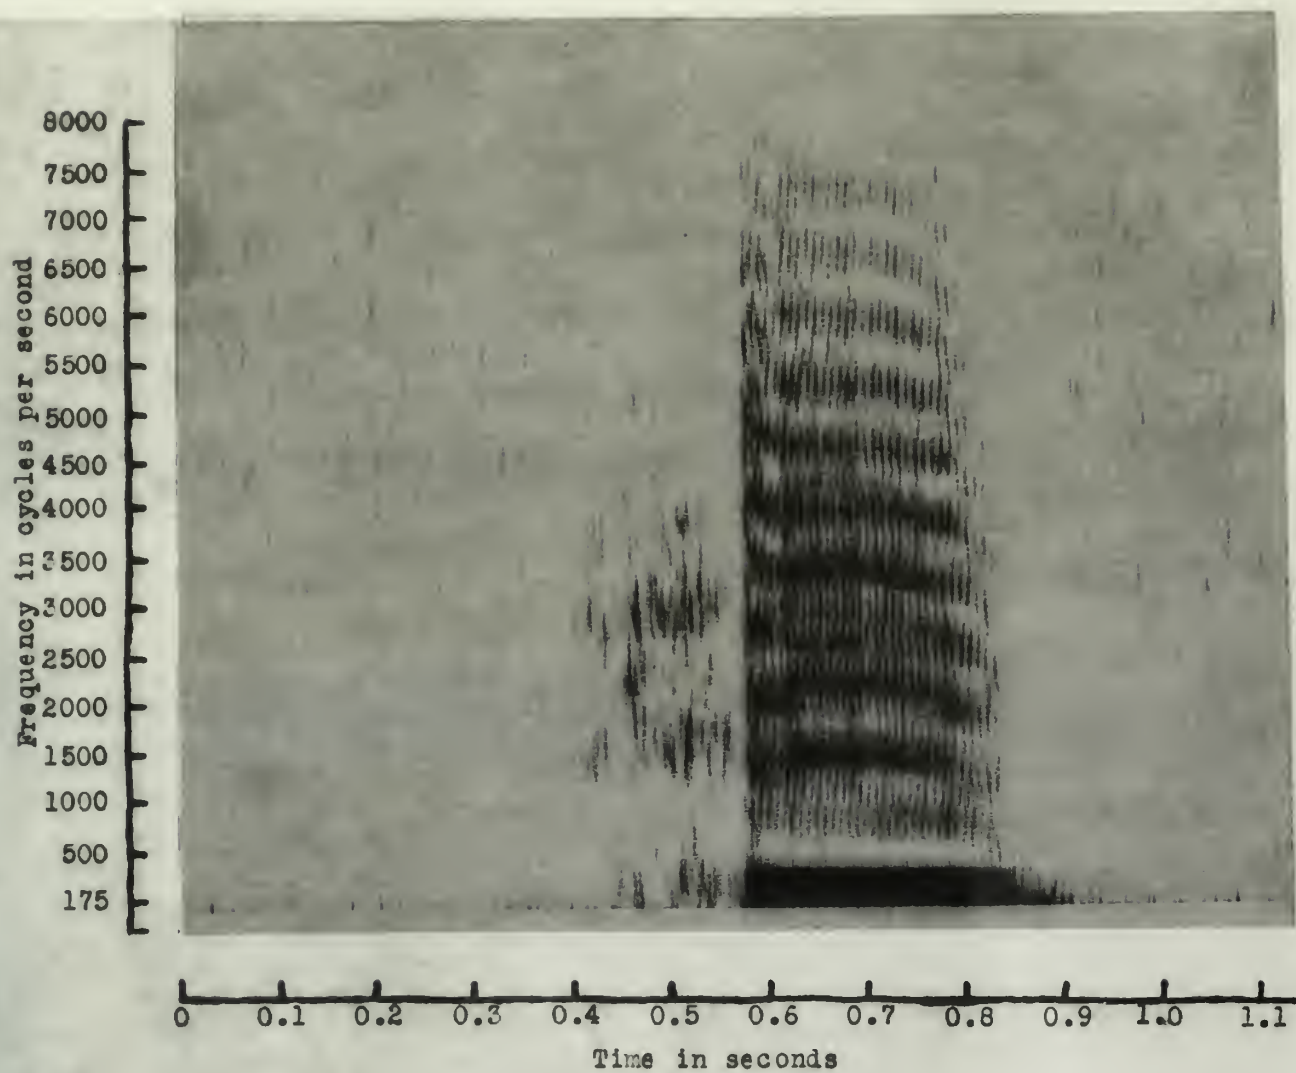


Figure 31.

Spectrogram of the word "she" at output of the transmitting end amplifier with $m = 0.546$.

BIBLIOGRAPHY

1. Beranek, L. L. Acoustics Measurements, J. Wiley and Sons, 1949, p. 391.
2. Straus, Oliver H., The Relation of Phonetics and Linguistics to Communication Theory, The Journal of the Acoustical Society of America, Volume 22, Number 6, November, 1950.
3. Potter, R. K., Kopp, G. A., and Green, H. C., Visible Speech, D. Van Nostrand Co., 1947, Chapter 5.
4. Fletcher, Harvey, Speech and Hearing, D. Van Nostrand Co. 1929, Chapter 5.
5. McCann, D. G., Wilts, C. H., and Locanthi, B.N., Electronic Techniques Applied to Analogue Methods of Computation, Proceedings of the Institute of Radio Engineers, Volume 37, Number 8, August 1949.
6. Tucker, D. G., Rectifier Resistance Laws, Wireless Engineer, April, 1948, p. 117.
7. Brown, R., Martin, De Loss K., and Potter, Ralph K., Some Studies in Radio Broadcast Transmission, Proceedings of the Institute of Radio Engineers, February, 1929, pp. 57-132.
8. Gruenz, O. A., An 8000 Cycle Sound Spectrograph, Bell Laboratories Record, June, 1951, pp. 256-261.

REFERENCES

1. Kramers, J. A. J. *Excitation Spectra*, 1937, p. 117.
2. Kramers, J. A. J. *The Physics of Electrons and Electrons in Semiconductors*, 1937, p. 117.
3. Kramers, J. A. J., and G. A. J. *Excitation Spectra*, 1937, p. 117.
4. Kramers, J. A. J., and G. A. J. *Excitation Spectra*, 1937, p. 117.
5. Kramers, J. A. J., and G. A. J. *Excitation Spectra*, 1937, p. 117.
6. Kramers, J. A. J., and G. A. J. *Excitation Spectra*, 1937, p. 117.
7. Kramers, J. A. J., and G. A. J. *Excitation Spectra*, 1937, p. 117.
8. Kramers, J. A. J., and G. A. J. *Excitation Spectra*, 1937, p. 117.

JUL 2
FEB 8
MAR 11
DE 11 57
OC 15 58
16 AUG 66
10 OCT 72

BINDERY
889
RENEWED
4645
5045
5

20742⁴

Thesis
K6

Knickel
Power law speech compression
and expansion.

★
FEB 8
MAR 11
DE 11 57
OC 15 58
16 AUG 66
10 OCT 72

BINDERY
889
RENEWED
4645
5045
15095
20114

Thesis
K6

Knickel
Power law speech compression and
expansion.

20742

Library
U. S. Naval Postgraduate School
Monterey, California



thesK6

Power law speech compression and expansi



3 2768 002 10671 8

DUDLEY KNOX LIBRARY